



Push-Pull Circular Connector 8+1 (Photoelectric Mixed) B Series EGG Socket Connector

Part Number:

EGG.3B.809.CLL



Basic Information

Contacts	9 Pin
Gender	Male
Insulator	PEEK
Orientation	Straight
Product Series	3B
Termination	Solder

Environmental Specification

Vibration Resistance	10-2000Hz.15g
Disinfection Resistance	-20 times(PSU), >100 times (PPSU), >200 times (PEEK)
Env Experiment	20 / 80 / 21
Environmental Experiment	50 / 175 / 21
Humidity Resistance	Up to 95% at 60 °C
Impact Resistance	100g 6ms
Leakage Rate	< 10-7mbar. L.s-1
Protection Grade	IP50
Corrosion Resistance	> 144h
Shielding Effect	> 80 dB at 1GHz, > 95 dB at 10MHz
Solvent Corrosion Resis	Average (PSU), Good (PPSU), Very Good (PEEK)
Temp Range	- 20 °C\, + 100 °C(00 to 1b), - 20 °C\, + 80 °C(2b to 5b)
Temperature Range Meta	-55°C ~ +250°C
Temperature Range Plastic	-55°C ~ +150°C (PSU), -55°C ~ +180°C (PPSU), -55°C ~ +250°C (PEEK)

Material Specification

Shell Material	Metal
----------------	-------

Mechanical Specification

Durability	> 5000 times
------------	--------------


Contact Layout



Size

编号		尺寸 (mm)								
型号	系列	A	B	e	E	L	M	N ¹⁾	S1	S3
EGG	00	8	10.2	M7x0.5	6.0	15.5	1.0	13.7	6.3	9
EGG	0B	10	12.4	M9x0.6	7.0	20.7	1.2	19.1	8.2	11
EGG	1B	14	15.8	M12x1.0	7.5	23.0	1.5	21.1	10.5	14
EGG	2B	18	19.2	M15x1.0	8.5	26.7	1.8	24.6	13.5	17
EGG	3B	22	25.0	M18x1.0	11.5	30.7	2.0	28.1	16.5	22
EGG	4B	28	34.0	M25x1.0	12.0	35.7	2.5	34.1	23.5	30
EGG	5B	40	40.0	M35x1.0	11.0	43.5	3.0	39.6	33.5	-

How to Order

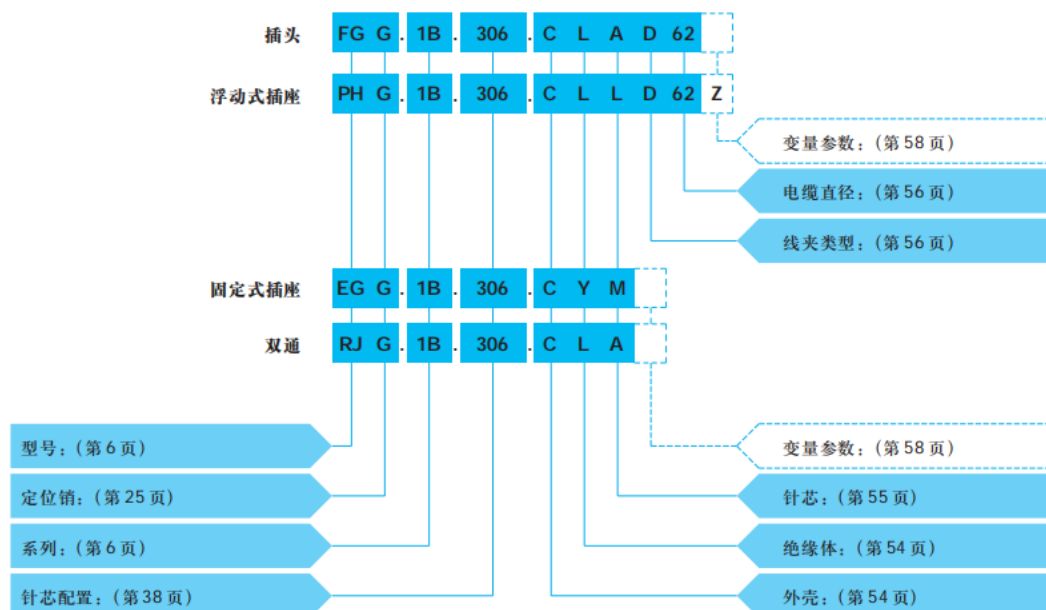

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.