



Push-Pull Circular Connector B Series FGG Plug Cable Mount Connector

Part Number:

FGG.CLAD62



Basic Information

Connector Type	Plug
Contacts	10 Pin, 12 Pin, 14 Pin, 16 Pin, 18 Pin, 19 Pin, 2 Pin, 20 Pin, 22 Pin, 24 Pin, 26 Pin, 3 Pin, 30 Pin, 32 Pin, 4 Pin, 5 Pin, 6 Pin, 7 Pin, 8 Pin, 9 Pin
Mounting Type	Cable Mount
Orientation	Straight
Product Series	00B, 0B, 1B, 2B, 3B, 4B

Environmental Specification

Vibration Resistance	10-2000Hz.15g
Disinfection Resistance	-20 times(PSU), >100 times (PPSU), >200 times (PEEK)
Env Experiment	20 / 80 / 21
Environmental Experiment	50 / 175 / 21
Humidity Resistance	Up to 95% at 60 °C
Impact Resistance	100g 6ms
Leakage Rate	< 10-7mbar. L.s-1
Protection Grade	IP50
Corrosion Resistance	> 144h
Shielding Effect	> 80 dB at 1GHz, > 95 dB at 10MHz
Solvent Corrosion Resis	Average (PSU), Good (PPSU), Very Good (PEEK)
Temp Range	- 20 ° C\, + 100 ° C(00 to 1b), - 20 ° C\, + 80 ° C(2b to 5b)
Temperature Range Meta	-55°C ~ +250°C
Temperature Range Plastic	-55°C ~ +150°C (PSU), -55°C ~ +180°C (PPSU), -55°C ~ +250°C (PEEK)


Material Specification

Insulation Material	PPS
Shell Material	Copper Alloy

Mechanical Specification

Durability	> 5000 times
------------	--------------


Contact Layout

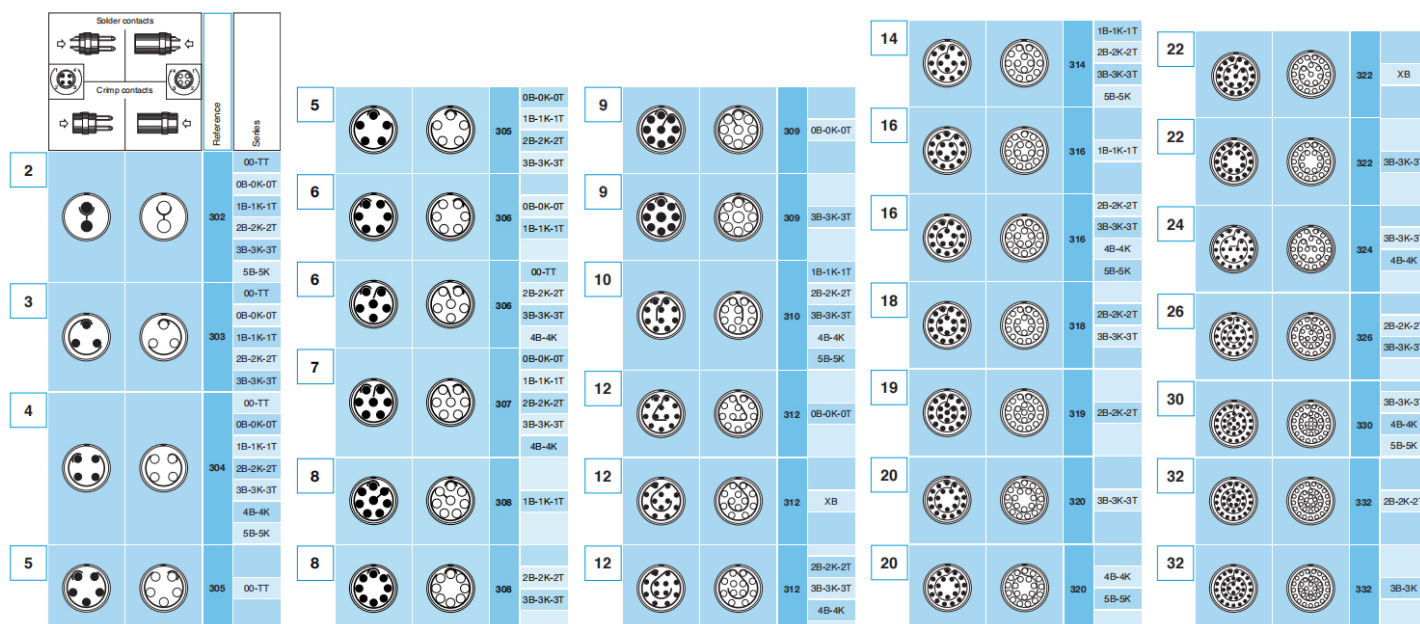

Size

Reference		Dimensions (mm)				
Model	Series	A	L	M	S1	S2
FGG	00 ¹⁾	6.4	28.5	20.5	5.5	5
FGG	0B	9.5	36.0	26.0	8.0	7
FGG	1B	12.0	43.0	32.0	10.0	9
FGG	XB	13.0	44.0	33.5	11.0	10
FGG	2B	15.0	50.0	38.0	13.0	12
FGG	3B	18.0	58.0	43.0	15.0	14
FGG	4B	25.0	75.0	57.0	21.0	20
FGG	5B	35.0	103.0	78.0	31.0	30

How to Order

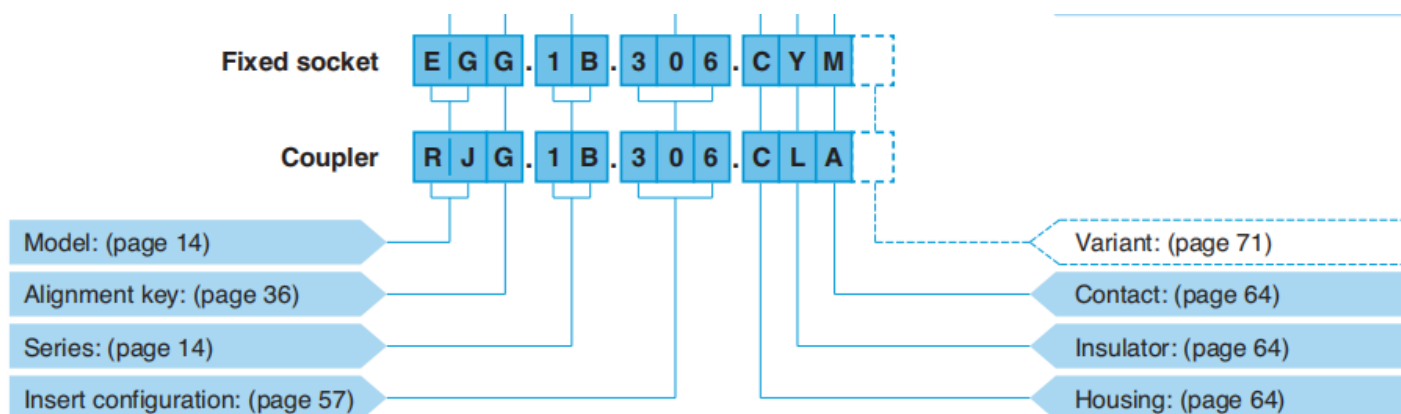

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.