



Push-Pull Circular Connector B Series PHG Socket with Collet Connector

Part Number:

PHG.CLLD62Z

Basic Information

Connector Type	Socket
Contact Termination	Solder
Contact Type	Female Pin
Contacts	10 Pin, 12 Pin, 14 Pin, 16 Pin, 18 Pin, 19 Pin, 2 Pin, 20 Pin, 22 Pin, 24 Pin, 26 Pin, 3 Pin, 30 Pin, 32 Pin, 4 Pin, 5 Pin, 6 Pin, 7 Pin, 8 Pin, 9 Pin
Mounting Type	Cable Mount
Orientation	Straight
Product Series	00B, 0B, 1B, 2B, 3B, 4B

Environmental Specification

Vibration Resistance	10-2000Hz.15g
Disinfection Resistance	-20 times(PSU), >100 times (PPSU), >200 times (PEEK)
Env Experiment	20 / 80 / 21
Environmental Experiment	50 / 175 / 21
Humidity Resistance	Up to 95% at 60 °C
Impact Resistance	100g 6ms
Ingress Protection	IP50
Leakage Rate	< 10-7mbar. L.s-1
Corrosion Resistance	> 144h
Shielding Effect	> 80 dB at 1GHz, > 95 dB at 10MHz
Solvent Corrosion Resis	Average (PSU), Good (PPSU), Very Good (PEEK)
Temp Range	- 20 ° C\, + 100 ° C(00 to 1b), - 20 ° C\, + 80 ° C(2b to 5b)
Temperature Range Meta	-55°C ~ +250°C
Temperature Range Plastic	-55°C ~ +150°C (PSU), -55°C ~ +180°C (PPSU), -55°C ~ +250°C (PEEK)


Insulation Material	PPS
Shell Material	Copper Alloy

Durability	> 5000 times
------------	--------------

				Reference	Series
2			302	00-TT 0B-0K-0T 1B-1K-1T 2B-2K-2T 3B-3K-3T 5B-5K	
3			303	00-TT 0B-0K-0T 1B-1K-1T 2B-2K-2T 3B-3K-3T	
4			304	00-TT 0B-0K-0T 1B-1K-1T 2B-2K-2T 3B-3K-3T 4B-4K 5B-5K	
5			305	00-TT	
5			305	0B-0K-0T 1B-1K-1T 2B-2K-2T 3B-3K-3T	
6			306	0B-0K-0T 1B-1K-1T	
6			306	00-TT 0B-0K-0T 2B-2K-2T 3B-3K-3T 4B-4K 0B-0K-0T	
7			307	00-TT 0B-0K-0T 1B-1K-1T 2B-2K-2T 3B-3K-3T 4B-4K	
8			308	1B-1K-1T	
8			308	2B-2K-2T 3B-3K-3T	
9			309	0B-0K-0T	
9			309	3B-3K-3T	
10			310	1B-1K-1T 2B-2K-2T 3B-3K-3T 4B-4K 5B-5K	
12			312	0B-0K-0T	
12			312	XB	
12			312	2B-2K-2T 3B-3K-3T 4B-4K	
14			314	1B-1K-1T 2B-2K-2T 3B-3K-3T 5B-5K	
16			316	1B-1K-1T	
16			316	2B-2K-2T 3B-3K-3T 4B-4K 5B-5K	
18			318	2B-2K-2T 3B-3K-3T	
19			319	2B-2K-2T	
20			320	3B-3K-3T	
20			320	4B-4K 5B-5K	
22			322	XB	
22			322	3B-3K-3T	
24			324	3B-3K-3T 4B-4K	
26			326	2B-2K-2T 3B-3K-3T	
30			330	3B-3K-3T 4B-4K 5B-5K	
32			332	2B-2K-2T	
32			332	3B-3K-3T	

Reference		Dimensions (mm)			
Model	Series	A	L	S1	S2
PHG	001)	6.8	26.0	5.5	5
PHG	0B	9.5	35.5	8.0	7
PHG	1B	12.5	40.5	10.0	9
PHG	XB	13.0	46.0	11.0	10
PHG	2B	16.5	47.0	13.0	12
PHG	3B	19.0	56.0	15.0	14
PHG	4B	26.0	73.0	21.0	20
PHG	5B	36.0	99.0	31.0	30

How to Order

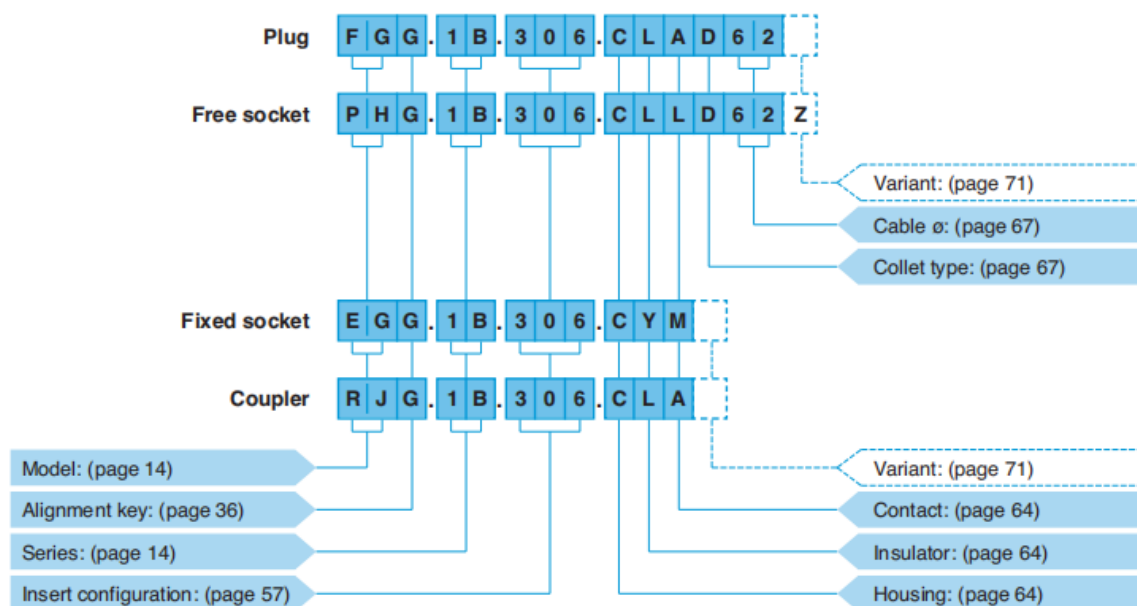

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.