

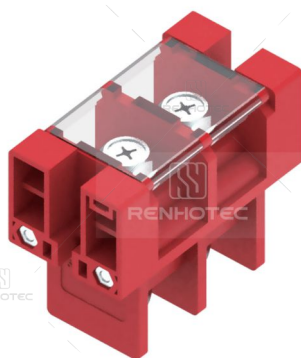




350A Barrier Terminal Block, 2 in 2 out, pitch
35.4mm, Red

Part Number:

RHT-PG120-00-34.5-02P-C



Basic Information

Bottom Termination	Screw
Color	Red
Feature	Cover, Flange
Number of Interface Rows	1
Number of Input Positions	2
Number of Output Positions	2
Pitch	34.5mm
Top Termination	Screw

Material Specification

Flammability Rating	UL94 V-0
Insulation Material	PBT(Housing) PC(Protective Cap)
Terminal Screw Material	Copper Alloy
Terminal Screw Plating	Nickel Plated

Electrical Specification

Rated Current	350A
Rated Voltage	600V
Wire Gauge	120mm ²






Mechanical Specification

Mounting Feature	Flange Mount
------------------	--------------

Environmental Specification

Operating Temperature	-40°C ~ 105°C
-----------------------	---------------

Size

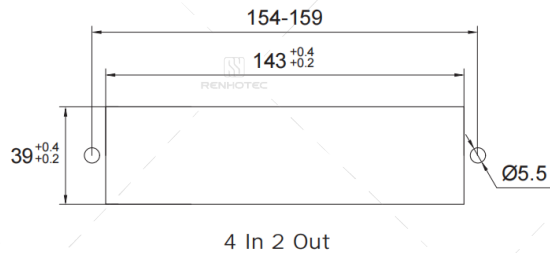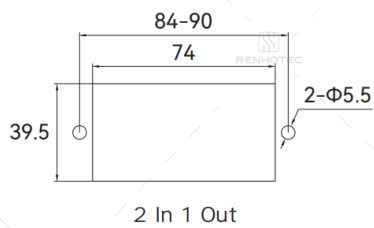

How to Order

Part Number Structure: RHT-PG-22-11-16.0-02P-C

RHT	Brand Name Fixed brand designation.
PG	Series Code Product series designation.
22	Wire Cross-Section (mm²) Range: 2.5mm² to 120mm²
11	Mold Version Internal tooling / mold revision identifier
16.0	Pitch (mm) Available: 11mm / 13mm / 16mm / 21mm / 27mm / 34.5mm
02P	Number of Positions Available from 1 to 12 positions
C	Internal Identification Code

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.