




ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2018/07/03	JIM. KING
B	First issue	Gavin	2020/09/03	JIM. KING
C	variation of parameters	Li	2026/02/04	Jason

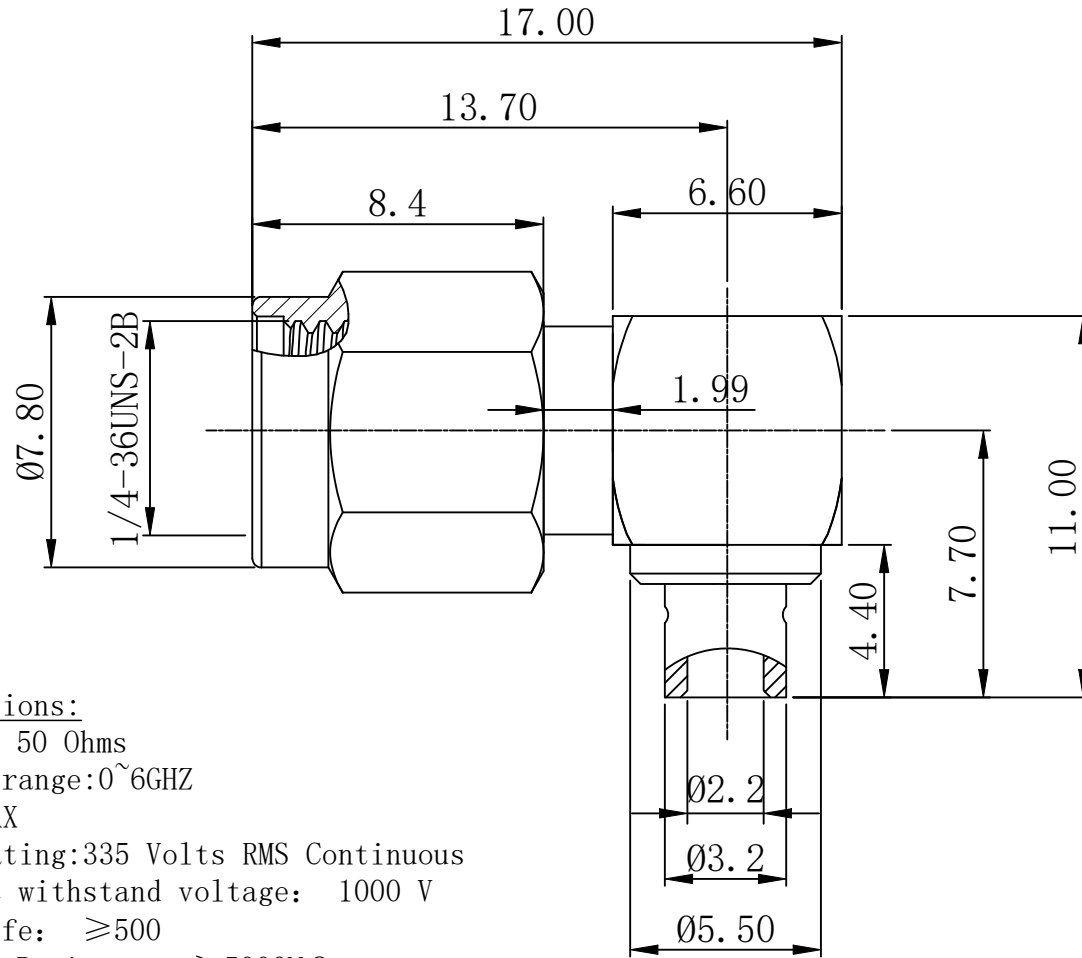

**Specifications:**

IMPEDANCE: 50 Ohms

Frequency range: 0~6GHZ

VSWR: 1.5MAX

Voltage Rating: 335 Volts RMS Continuous

Dielectric withstand voltage: 1000 V

Service life: ≥500

Insulation Resistance ≥5000MΩ

Center contact resistance: ≤3mΩ

Outer contact resistance: ≤2mΩ

Operation Temperature: -55°C ~ +165°C

5	Cap	Brass	Gold	1
4	Rubber Mat	Ptfe	None	1
3	Pin	Brass	Gold	1
2	Insulator	Ptfe	None	1
1	Body	Brass	Gold	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED					
			PART DESCRIPTION: SMA R/A plug solder type cable. RG405		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr:		P/N: RHT-612-0476		
	Check: Jason	Date	Scale	Unit	Type
	Draw: Li	2026.02.04	Free	MM	Z
		Page	1/1		