

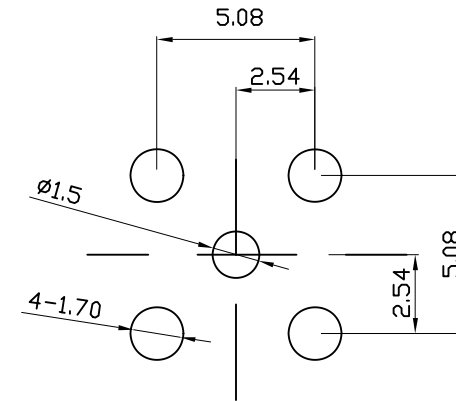


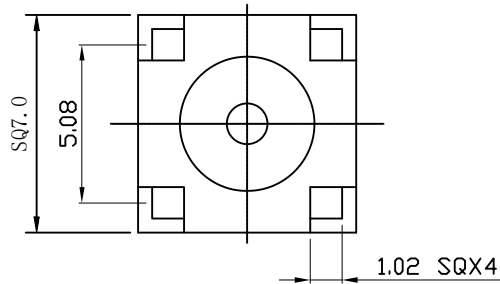

| ISSUE | DESCRIPTION             | DWN   | DATE       | APPROVEN  |
|-------|-------------------------|-------|------------|-----------|
| A     | First issue             | Gavin | 2019/01/23 | JIM. KING |
| B     | variation of parameters | Li    | 2026/02/04 | Jason     |

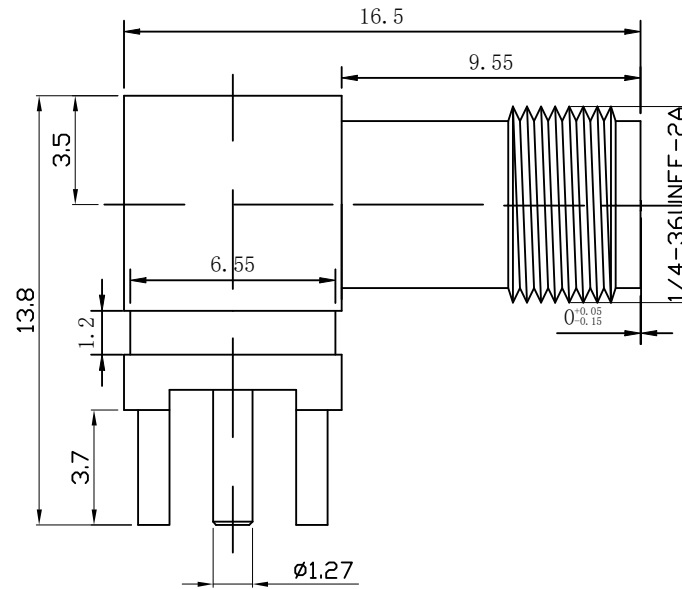

**Specifications:**  
 IMPEDANCE: 50 Ohms  
 Frequency range: 0~6GHZ  
 VSWR: 1.3MAX  
 Voltage Rating: 335 Volts RMS Continuous  
 Dielectric withstand voltage: 1000 V  
 Service life: ≥500  
 Insulation Resistance ≥5000MΩ  
 Center contact resistance: ≤3mΩ  
 Outer contact resistance: ≤2mΩ  
 Operation Temperature: -55℃ ~ +165℃

| NO | DESCRIPTION | MATERIAL | FINISH | QTY |
|----|-------------|----------|--------|-----|
| 3  | PIN         | BRASS    | GOLD   | 1   |
| 2  | INSULATOR   | None     | WHITE  | 1   |
| 1  | BODY        | BRASS    | GOLD   | 1   |

|   |   |                   |       |      |      |
|---|---|-------------------|-------|------|------|
| -TOLERANCES-<br>UNLESS OTHERWISE<br>SPECIFIED   | <b>RENHOTEC GROUP</b>                               |                   |       |      |      |
|   | PART DESCRIPTION:<br>SMA Jack Right angle PCB Mount |                   |       |      |      |
| UNLESS OTHERWISE SPECIFIED<br>TOLERANCES FOR MILLIMETERS ARE:<br>0.5 - 8mm ± 0.15mm<br>8 - 30mm ± 0.20mm<br>30 - 120mm ± 0.30mm | Appr:   | P/N: RHT-612-0541 |       |      |      |
|   | Check: Jason  | Date              | Scale | Unit | Type |
|   | Draw: Li  | 2026.02.04        | Free  | MM   | Z    |