


## SMB Connector Straight Jack Male Pin Crimp 50ohm for RG178 Cable - RHT-626-0211



### Drawing

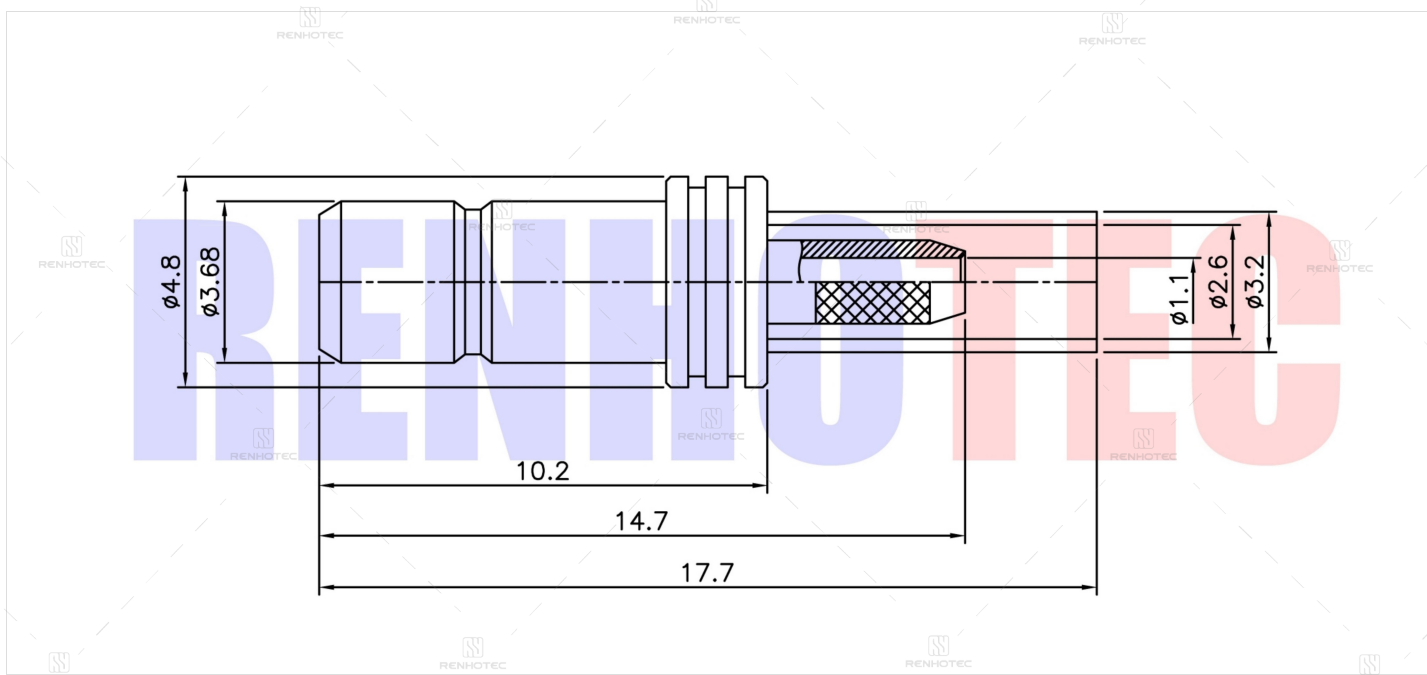

**Basic Information**

|                 |          |
|-----------------|----------|
| Connector Type  | Jack     |
| RF Series       | SMB Type |
| Fastening Type  | Snap On  |
| Cable Type      | RG178    |
| Mounting Type   | Cable    |
| Number of Ports | 1        |
| Orientation     | Straight |

**Mechanical Specification**

|                           |       |
|---------------------------|-------|
| Contact Termination Style | Crimp |
|---------------------------|-------|

**Material and Finish**

|                       |          |             |
|-----------------------|----------|-------------|
| Component Description | Material | Finish      |
| Shell                 | Copper   | Gold Plated |
| Center Contact        | Brass    | Gold Plated |
| Insulator             | Teflon   |             |

**Impedance Testing**

|           |        |
|-----------|--------|
| Impedance | 50 ohm |
|-----------|--------|

## Frequency & VSWR Test Report

Frequency Range

4GHz




## Contact Resistance Test

Contact Type

Male Pin



Working Voltage & Insulation Resistance Test

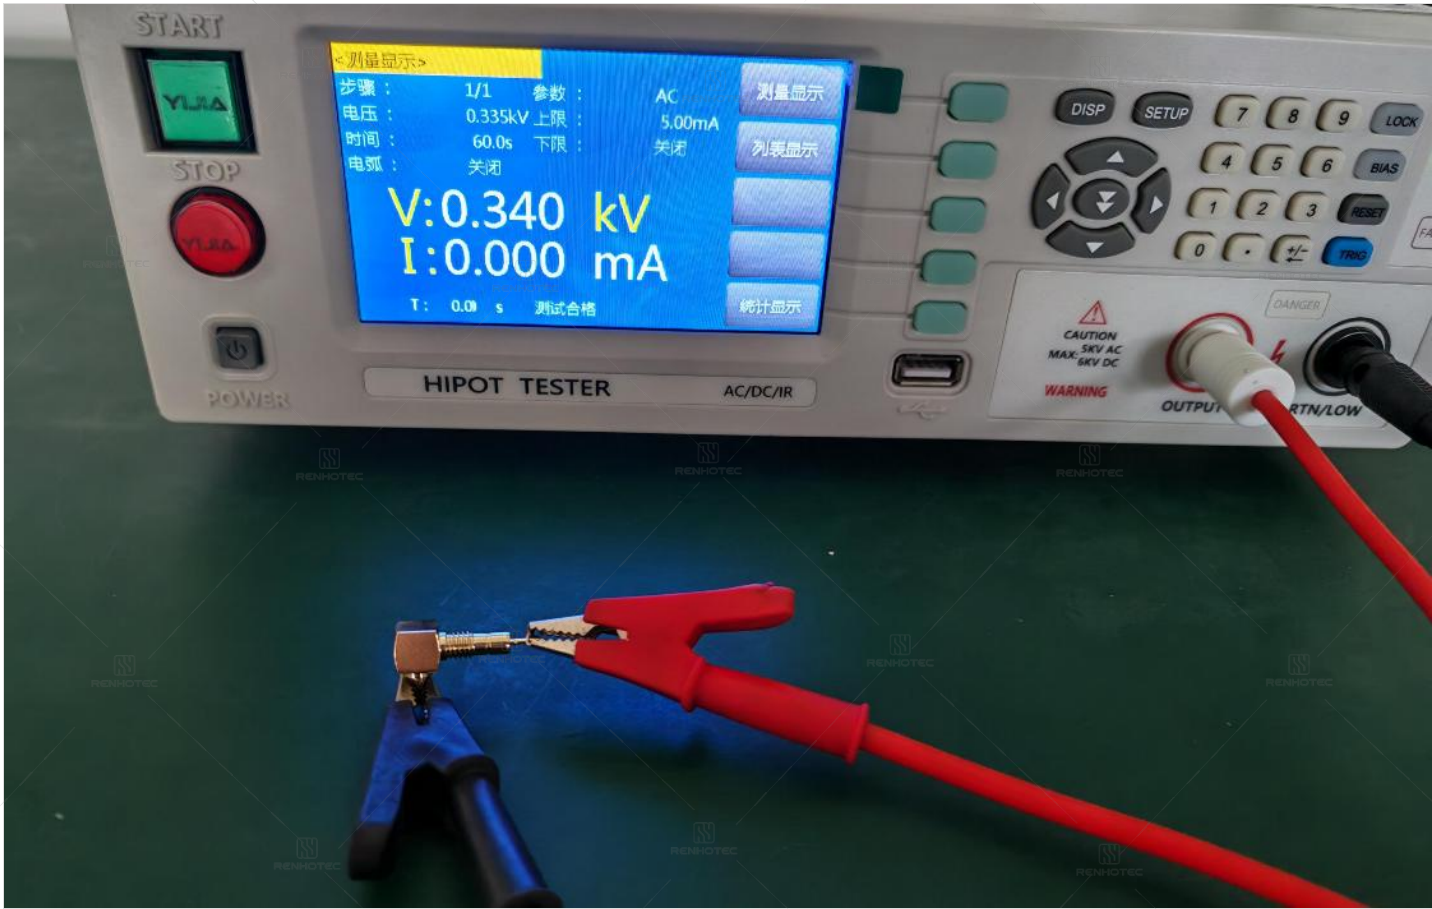

Version History

| REV | Date      | Revise Contents         | Drafter | Approver |
|-----|-----------|-------------------------|---------|----------|
| A.0 | 2026.7.16 | The initial formulation | Esther  | Joson    |

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.