


## R/A SMP Jack for RG405 Cable - RHT-628-0013

### Drawing

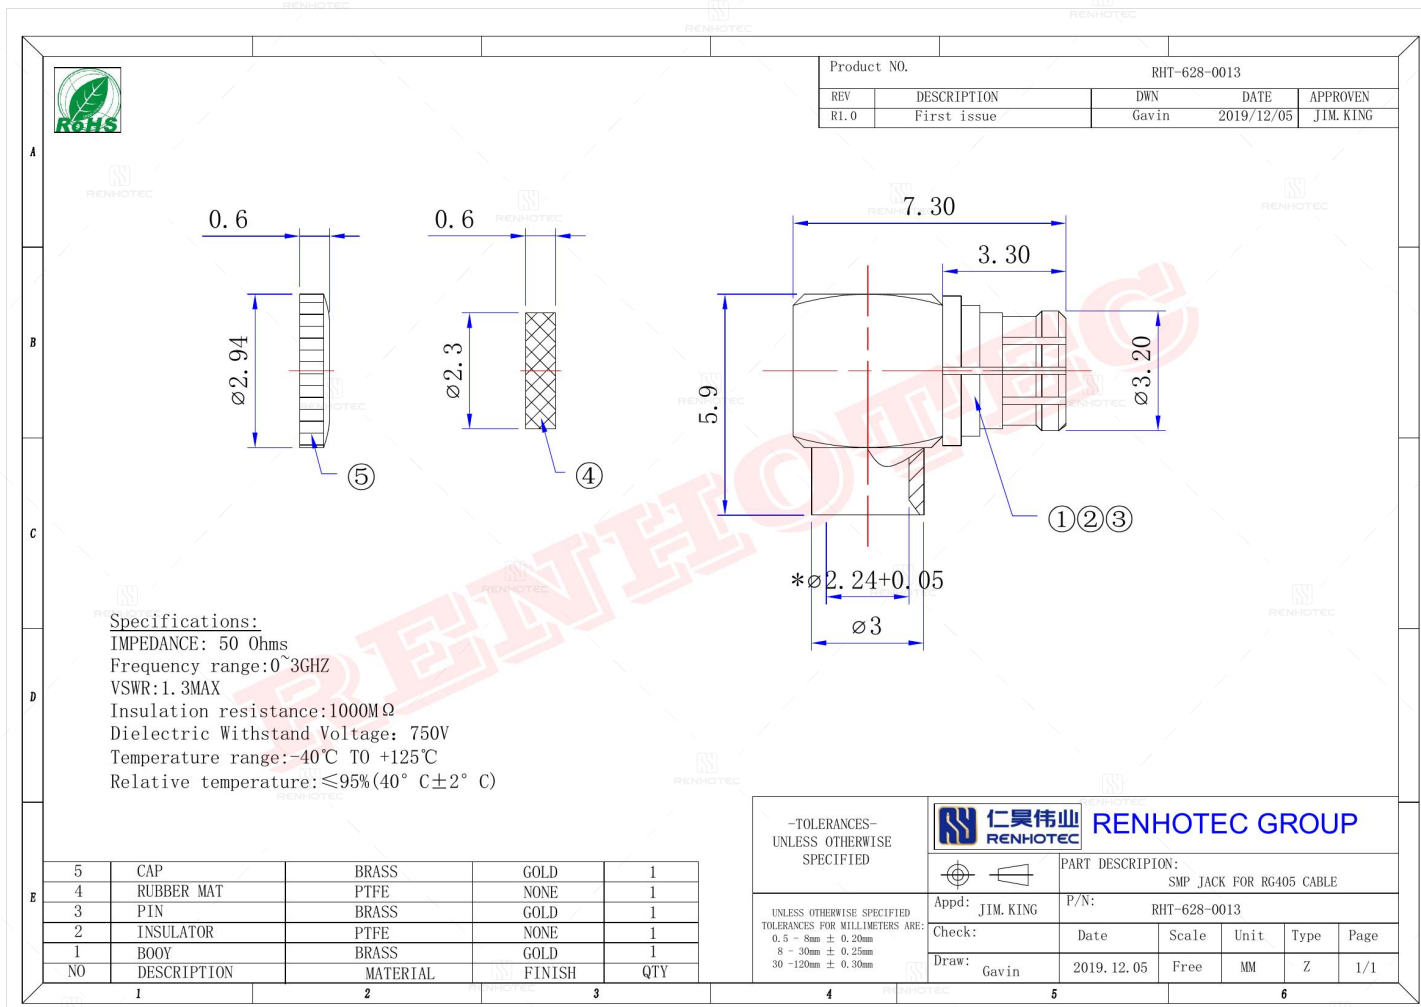

### Basic Information

|                |             |
|----------------|-------------|
| Connector Type | Jack        |
| Orientation    | Right Angle |
| RF Series      | SMP Type    |
| Suitable Cable | RG405       |

### Electrical Specification

|                                 |       |
|---------------------------------|-------|
| Dielectric Withstanding Voltage | 750 V |
|---------------------------------|-------|

### Environmental Specification

|                   |                 |
|-------------------|-----------------|
| Temperature Range | -40°C to +125°C |
|-------------------|-----------------|

## Material and Finish


| Component Description | Material | Finish      |
|-----------------------|----------|-------------|
| Cap                   | Brass    | Gold Plated |
| Insulator             | PTFE     | -           |
| Contact               | Brass    | Gold Plated |
| Center Contact        | Brass    | Gold Plated |

## Impedance Testing

|           |        |
|-----------|--------|
| Impedance | 50 ohm |
|-----------|--------|

## Frequency & VSWR Test Report

|                 |         |
|-----------------|---------|
| Frequency Range | 0-3GHz  |
| VSWR            | 1.3 MAX |

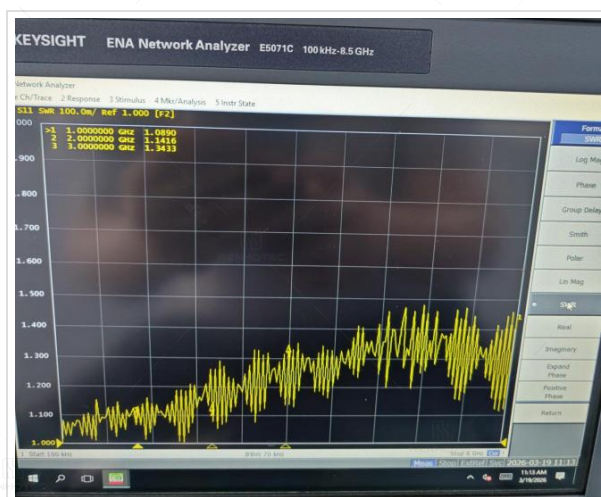

## Contact Resistance Test

Contact Type

Female Pin



## Working Voltage & Insulation Resistance Test

Insulation Resistance

1000MΩ Min



## Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.