





Product NO.		RHT-628-0010		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2018/06/19	JIM. KING

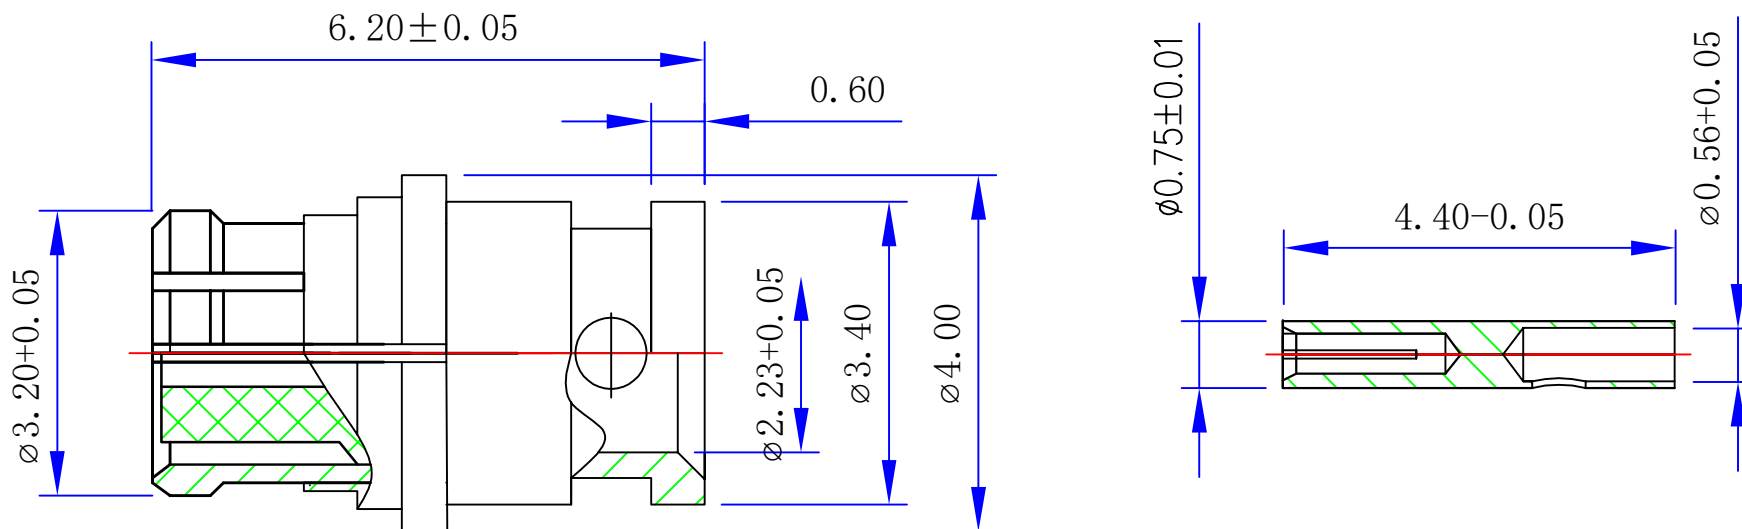

Specifications

Impedance: 50 Ω  
 Frequency Range: DC~6G  
 VSWR: 1.2MAX  
 Working Voltage: 500V rms @ sea level  
 Insulation Resistance: 5000 Ohms min  
 Temperature Range: -55°C TO +155°C  
 Relative Humidity: ≤95% (40°C ± 2°C)  
 Drawings products are in line with ROHS standards

3	PIN	phosphor copper	GOLD	1
2	INSULATOR	PTFE	NONE	1
1	BOOY	phosphor copper	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 <b>RENHOTEC GROUP</b>	
	PART DESCRIPTION: SMP JACK FOR RG405 CABLE	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm	Appd: JIM. KING	P/N: RHT-628-0010
	Check:	Date: 2018.06.19
	Draw: Gavin	Scale: Free
	Unit: MM	Type: Z
	Page: 1/1	