



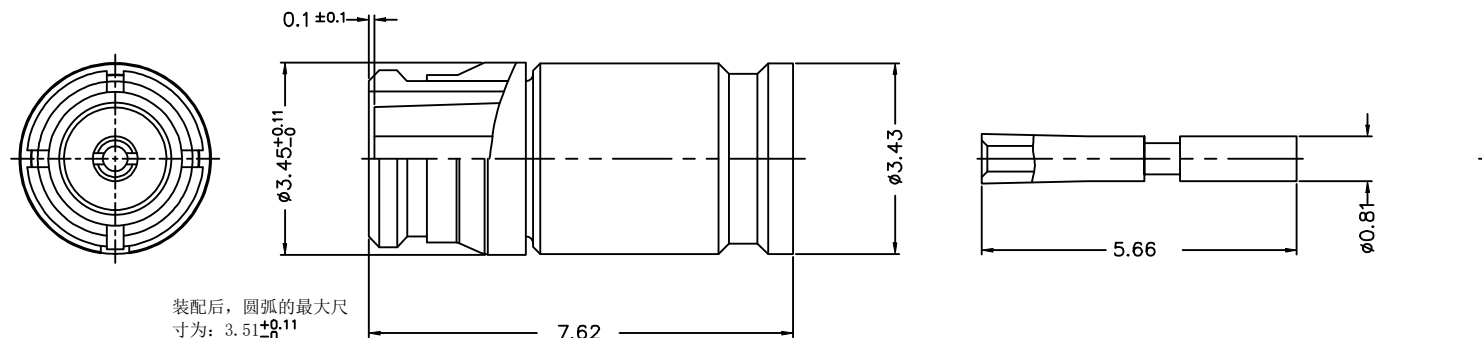

Product NO.		RHT-628-0036			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
R1.0	First issue	CTT	2024/02/26	JIM.KING	

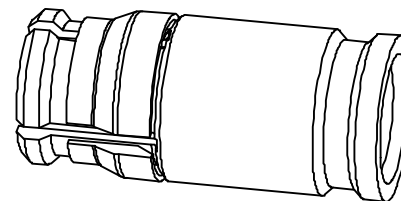

装配后，圆弧的最大尺寸为： $3.51^{+0.11}_0$

Performance:
 Impedance 50 Ω
 Frequency 0-18 GHz
 VSWR 1.5 Maxi
 Insertion loss 0.2dB Maxi
 Voltage rating 335 Veff Maxi
 Dielectric withstanding voltage 500 Veff mini
 Insulation resistance 5000 MΩ mini
 Mating life:100 Cycles mini
 Ambient temperature:-50℃~155℃

5	RETAINER RING	BE-C	GOLD	1
4	INSULATOR	TEFLON	NONE	1
3	CONTACT PIN	BE-C	GOLD	1
2	INSULATOR	TEFLON	NONE	1
1	BODY	BRASS	GOLD	1
No.	TITLE	MATERIAL	FINISH	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP				
	PART DESCRIPTION: SMP JACK FOR 086" CABLE				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appd:	P/N: RHT-628-0036			
	Check:	Date	Scale	Unit	Type
	Draw:	2024.02.26	Free	MM	Z
	JIM.KING				Page
	CTT				1/1