





Product NO.

RHT-628-2007

REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2023/09/13	JIM.KING

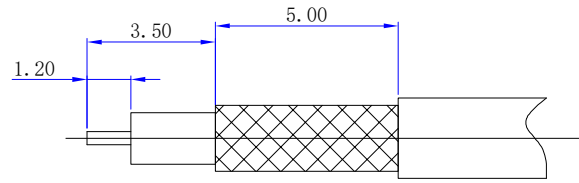

Recommended stripping size

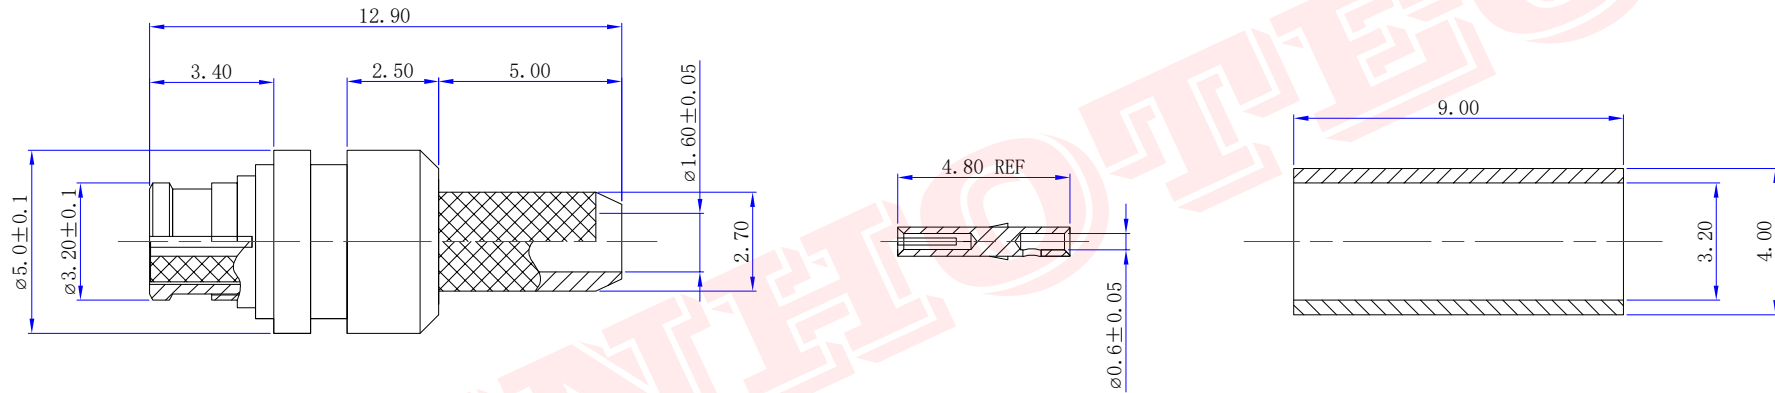

Specifications

Impedance: 50 Ω
 Frequency Range: DC~6G
 VSWR: 1.5MAX
 Dielectric withstand voltage: 750V
 Insulation: 1000M Ω
 Contact resistance: inner conductor 5m Ω , outer conductor 2.5m Ω
 Temperature Range: -40°C TO +125°C

4	COPPER PIPE	BRASS	NICKEL	1
3	CENTER PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NONE	1
1	BOOY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm \pm 0.10mm 8 - 30mm \pm 0.15mm 30 - 120mm \pm 0.20mm	RENHOTEC GROUP		PART DESCRIPTION: SMP JACK FOR RG316 CABLE			
	Appd: JIM.KING Check: Draw: Gavin	P/N: RHT-628-2007	Date	Scale	Unit	Type
		2023.09.13	Free	MM	Z	1/1