

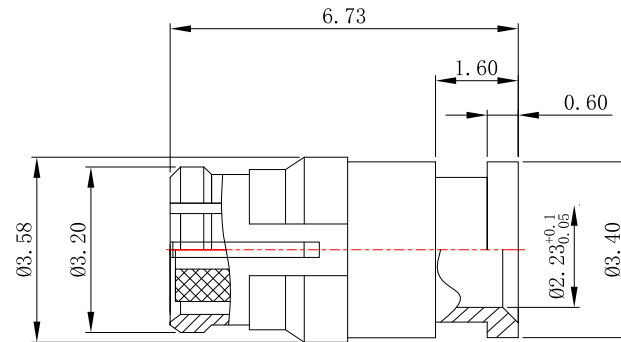



REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2023/10/27	JIM. KING

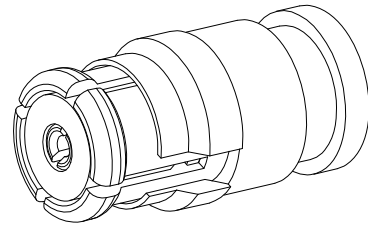


***Material:**

Body: Beryllium copper in accordance with ASTM B196.
 Alloy number UNS C17300, gold plated 5-10u “
 Contact: Beryllium copper in accordance with ASTM B196 standard.
 Alloy number UNS C17300, gold plated 5-10u “
 Insulator: polytetrafluoroethylene

Performance:

Impedance: 50 ohms
 Frequency: DC to 40 GHz
 VSWR: ≤ 1.40

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 RENHOTEC GROUP	
	PART DESCRIPTION: SMP JACK FOR 0.086" CABLE	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm	Appd: JIM. KING	P/N: RHT-628-2009
	Check:	Date: 2023.10.27
	Draw: Gavin	Scale: Free
	Unit: MM	Type: Z
	Page: 1/1	