




Product NO.		RHT-628-2012		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2023/12/05	JIM.KING

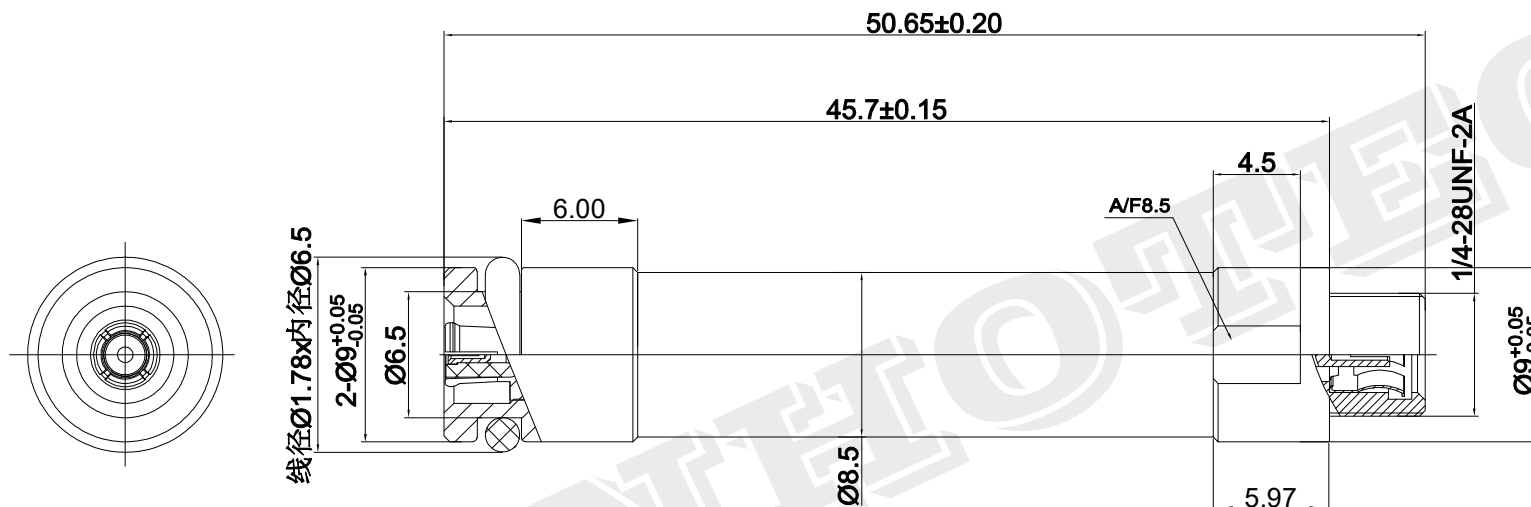

Material & Finishing:

- Center conductor:beryllium-copper(**C17300**) , Gold Plating
Outer conductor:Phosphor Bronze(**C54400**) , Gold Plating
- Insulators: PTFE
- Body : Stainless steel(**303F**) , Passivation Plating
- Other Metal Parts: Brass, nickel Plating
- Gasket: Silicone Rubber

Electrical Data:


- Impedance: 50 Ohms
- Frequency: 0~6GHz
- VSWR: ≤ 1.15 (0~3GHz)
- Insertion Loss: $\leq 0.2\text{dB}$ (0~3GHz)

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm 0.10\text{mm}$
8 - 30mm $\pm 0.15\text{mm}$
30 - 120mm $\pm 0.20\text{mm}$



RENHOTECH GROUP



PART DESCRIPTION:
SMP FEMALE TO BMAM FEMALE CONNECTOR

Appd: JIM.KING

P/N: RHT-628-2012

Check:

Date

Scale

Unit

Type

Page

Draw:

Gavin

2023. 12. 05

Free

MM

Z

1/1