



Product NO.		RHT-628-2015		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2024/06/06	JIM. KING

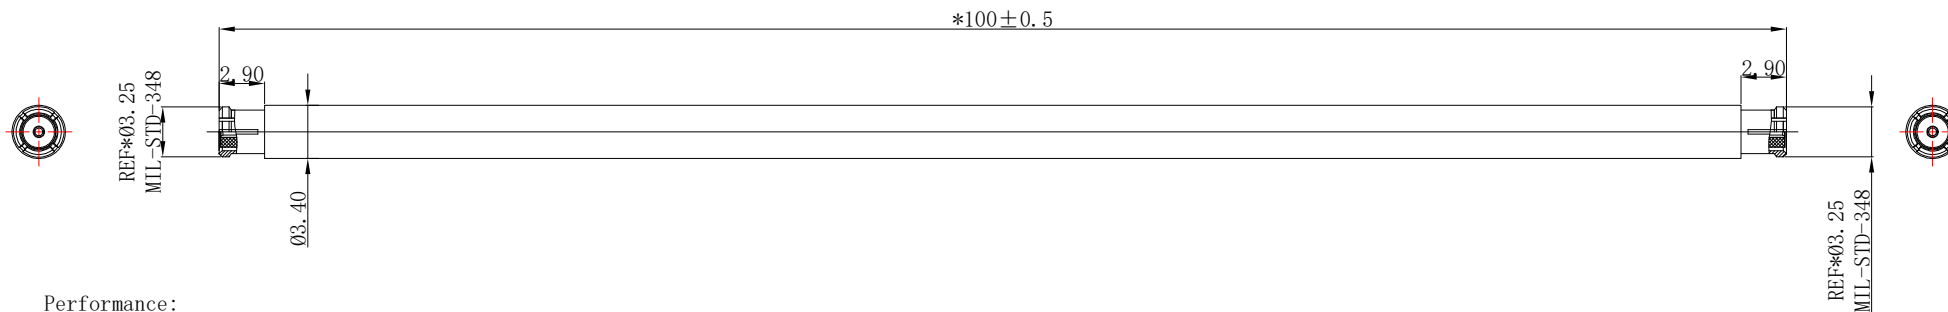


Performance:
 Impedance 50 Ω
 Frequency 0-18 GHz
 VSWR 1.4 Max
 Insertion loss 1.0dB Max
 Voltage rating 335 Veff Maxi
 Dielectric withstanding voltage 500 Veff mini
 Insulation resistance 5000 MΩ mini
 Mating life:100 Cycles mini
 Ambient temperature:-50°C~155°C

-TOLERANCES-
 UNLESS OTHERWISE
 SPECIFIED

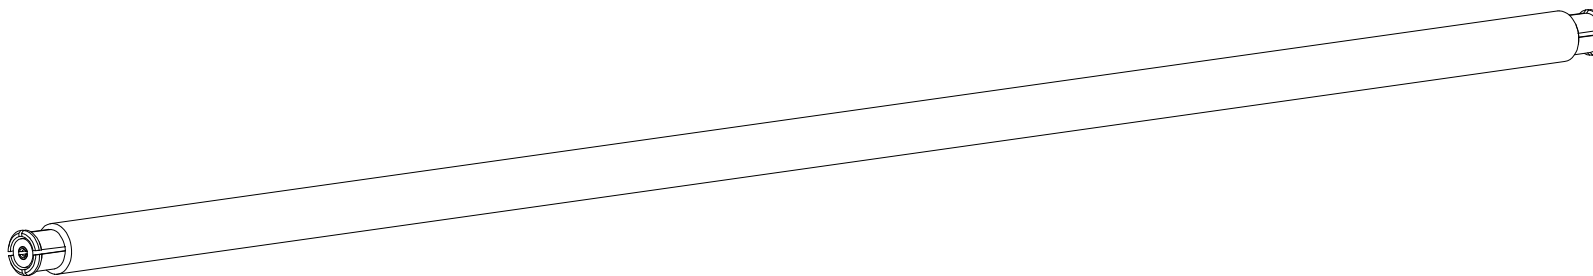

RENHOTEC GROUP



PART DESCRIPTION:
 SMP JACK TO SMP JACK CONNECTOR

UNLESS OTHERWISE SPECIFIED
 TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.10mm
 8 - 30mm ± 0.15mm
 30 - 120mm ± 0.20mm

Appd: JIM. KING

P/N: RHT-628-2015

Check:	Date	Scale	Unit	Type	Page
Draw: Gavin	2024.06.06	Free	MM	Z	1/1

3	CENTER PIN	BERYLLIUM BRONZE	GOLD-PLATING:5u"	1
2	INSULATOR	PTFE	NONE	1
1	BOOY	BERYLLIUM BRONZE	GOLD-PLATING:3u"	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY