
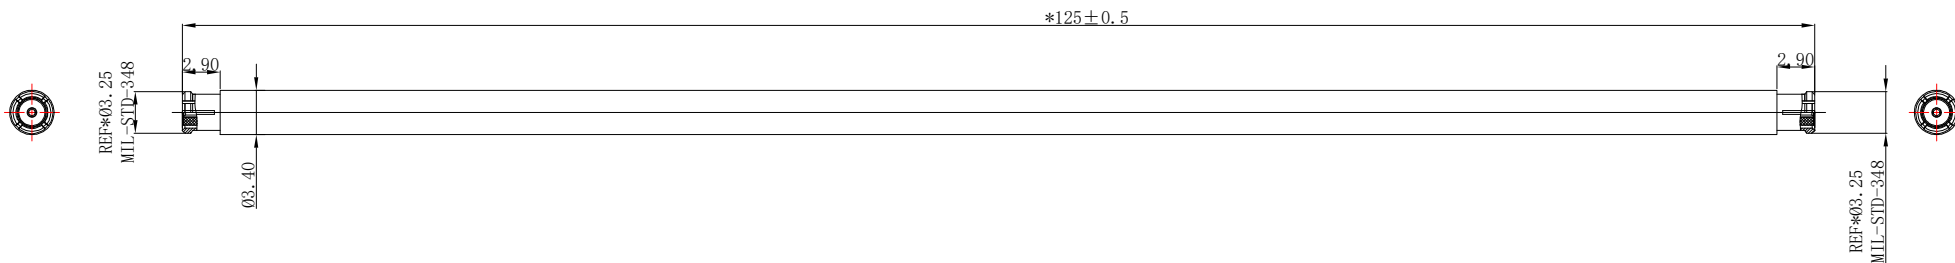


Product NO.		RHT-628-2016		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2024/06/06	JIM.KING

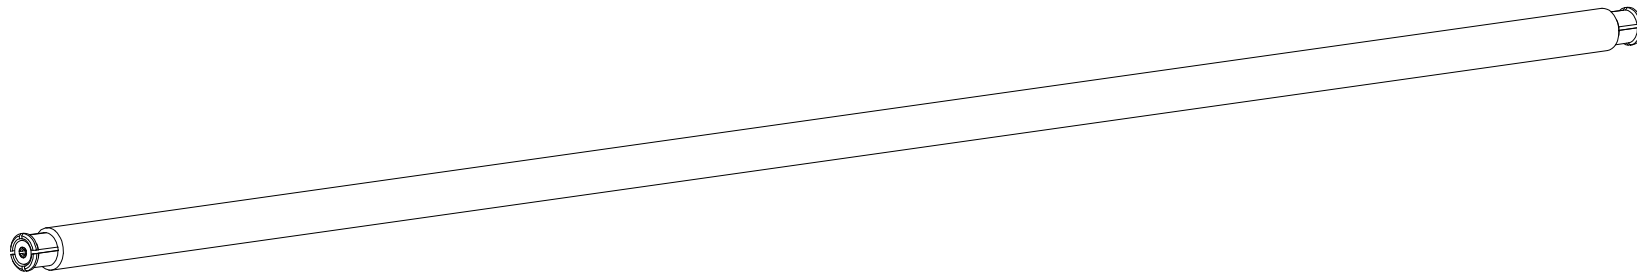

Performance:
 Impedance 50Ω
 Frequency 0-18 GHz
 VSWR 1.4 Max
 Insertion loss 1.0dB Max
 Voltage rating 335 Veff Maxi
 Dielectric withstanding voltage 500 Veff mini
 Insulation resistance 5000 MΩ mini
 Mating life:100 Cycles mini
 Ambient temperature:-50℃~155℃

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 RENHOTEC GROUP											
	PART DESCRIPTION: SMP JACK TO SMP JACK CONNECTOR											
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm	Appd: JIM.KING	P/N: RHT-628-2016										
	Check:	<table border="1"> <tr> <th>Date</th> <th>Scale</th> <th>Unit</th> <th>Type</th> <th>Page</th> </tr> <tr> <td>2024.06.06</td> <td>Free</td> <td>MM</td> <td>Z</td> <td>1/1</td> </tr> </table>	Date	Scale	Unit	Type	Page	2024.06.06	Free	MM	Z	1/1
	Date	Scale	Unit	Type	Page							
2024.06.06	Free	MM	Z	1/1								
Draw: Gavin												

3	CENTER PIN	BERYLLIUM BRONZE	GOLD-PLATING:5u"	1
2	INSULATOR	PTFE	NONE	1
1	BOOY	BERYLLIUM BRONZE	GOLD-PLATING:3u"	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY