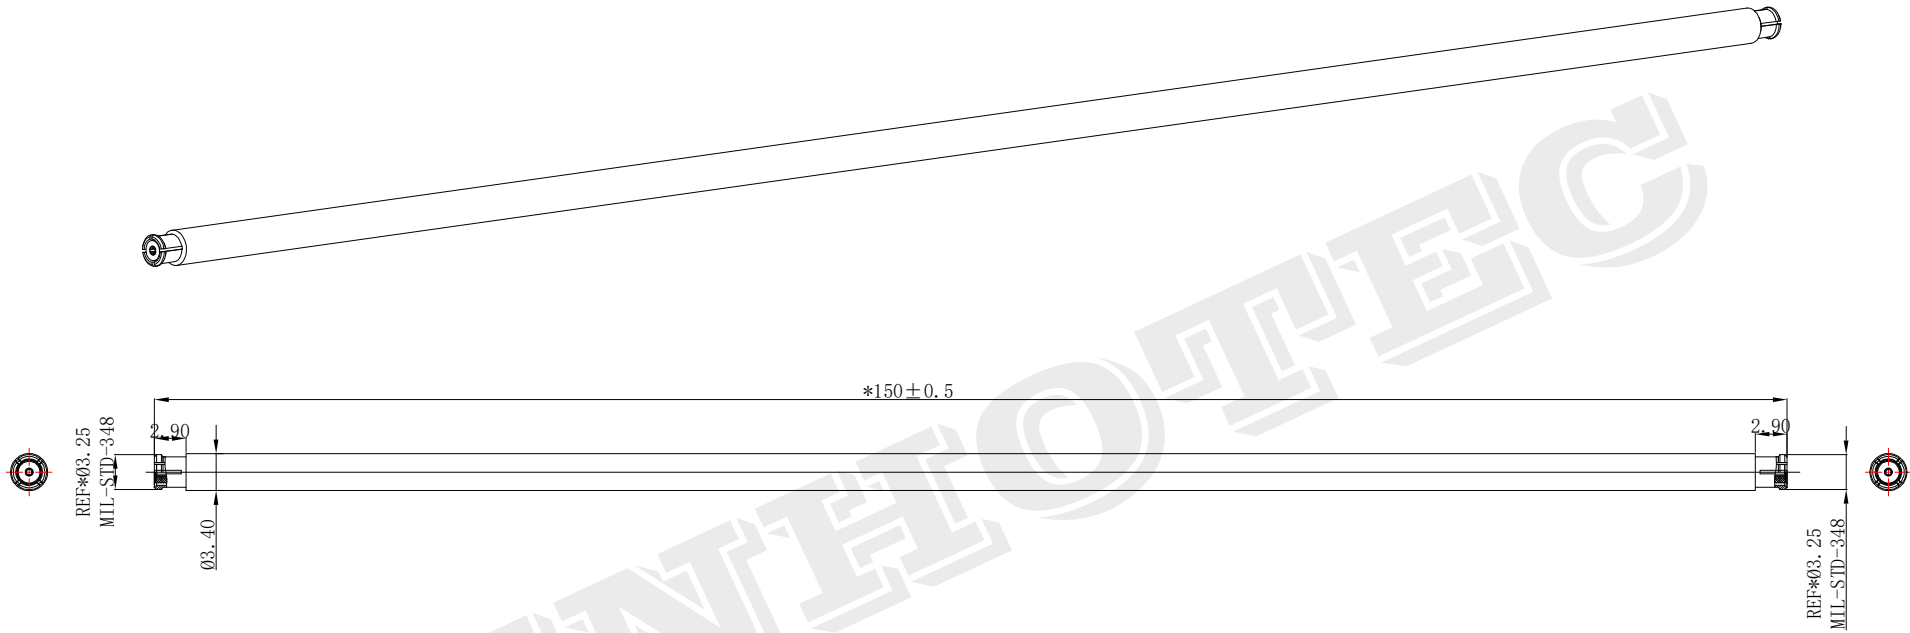




Product NO.		RHT-628-2017		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2024/06/06	JIM.KING



Performance:  
 Impedance 50Ω  
 Frequency 0-18 GHz  
 VSWR 1.4 Max  
 Insertion loss 1.0dB Max  
 Voltage rating 335 Veff Maxi  
 Dielectric withstanding voltage 500 Veff mini  
 Insulation resistance 5000 MΩ mini  
 Mating life:100 Cycles mini  
 Ambient temperature:-50℃~155℃

3	CENTER PIN	BERYLLIUM BRONZE	GOLD-PLATING:5u"	1
2	INSULATOR	PTFE	NONE	1
1	BOOY	BERYLLIUM BRONZE	GOLD-PLATING:3u"	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 <b>RENHOTEC GROUP</b>	
		PART DESCRIPTION: SMP JACK TO SMP JACK CONNECTOR
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm	Appd: JIM.KING	P/N: RHT-628-2017
	Check:	Date: 2024.06.06
	Draw: Gavin	Scale: Free
	Unit: MM	Type: Z
	Page: 1/1	