



| | | | | |
|------|-------------|-------|------------|----------|
| REV | DESCRIPTION | DWN | DATE | APPROVEN |
| R1.0 | First issue | Gavin | 2023/12/15 | JIM.KING |

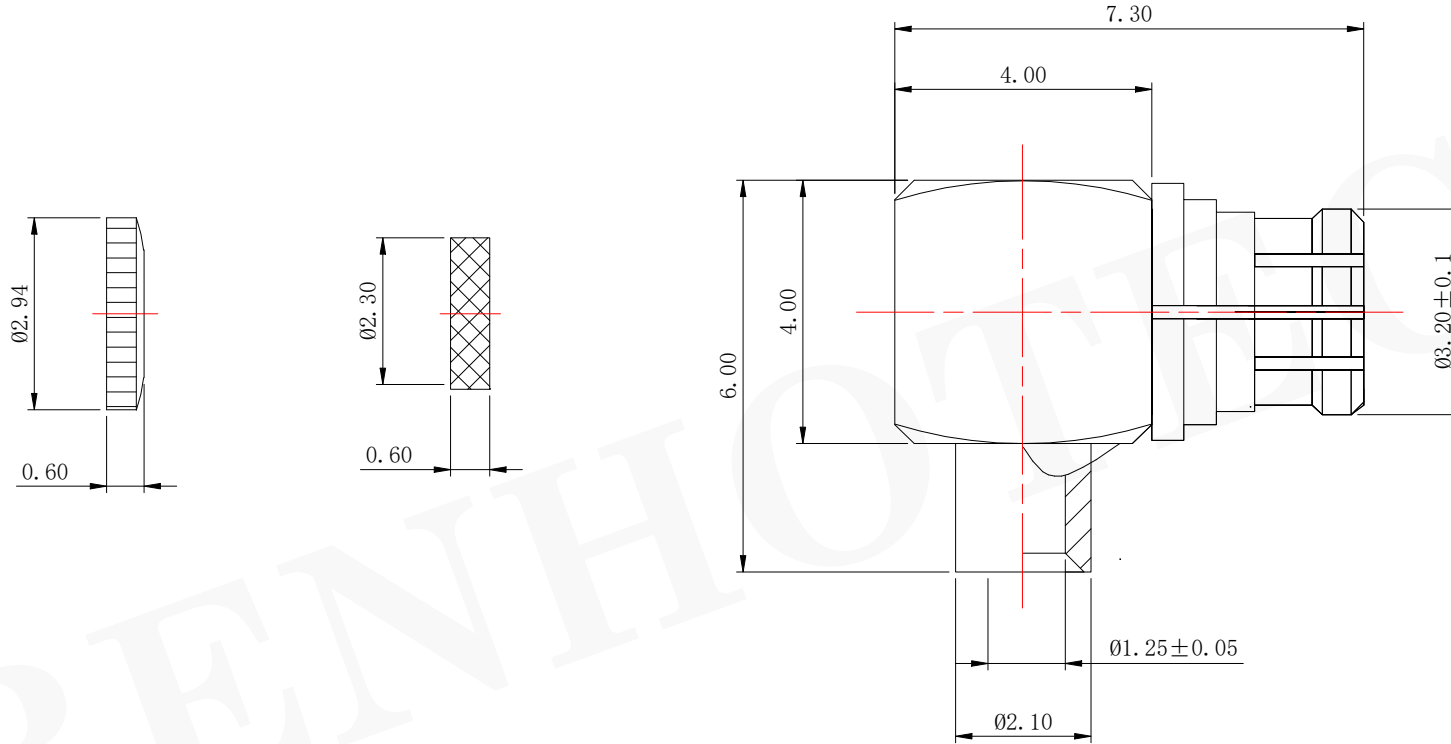

Performance:
 Impedance 50 Ω
 Frequency 0-6 GHz
 VSWR 1.2 Max
 Insertion loss 0.2dB Maxi
 Voltage rating 335 Veff Maxi
 Dielectric withstanding voltage 750V
 Insulation resistance 1000 MΩ mini
 Mating life:100 Cycles mini
 Ambient temperature:-50℃~155℃

| | | | | |
|----|------------------|-----------------|--------------|-----|
| 6 | METAL BACK COVER | BRASS | GOLD-PLATING | 1 |
| 5 | INSULATION PAD | PTFE | NONE | 1 |
| 4 | CENTER PIN | PHOSPHOR BRONZE | GOLD-PLATING | 1 |
| 3 | INSULATOR | PTFE | NONE | 1 |
| 2 | BOOY | BRASS | GOLD-PLATING | 1 |
| 1 | BOOY | BRASS | GOLD-PLATING | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | QTY |

| | | |
|---|---|-------------------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED |  RENHOTEC GROUP | |
| | PART DESCRIPTION: R/A SMP JACK FOR 047 CABLE | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm | Appd: JIM.KING | P/N: RHT-628-2026 |
| | Check: | Date: 2024.01.06 |
| | Draw: Gavin | Scale: Free |
| | Unit: MM | Type: Z |
| | Page: 1/1 | |