





REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2025/09/13	JIM.KING

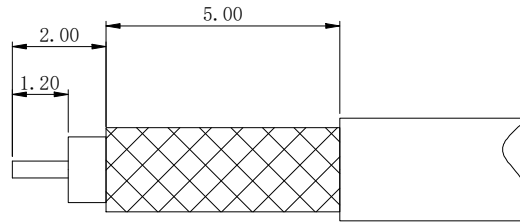

Recommended stripping size

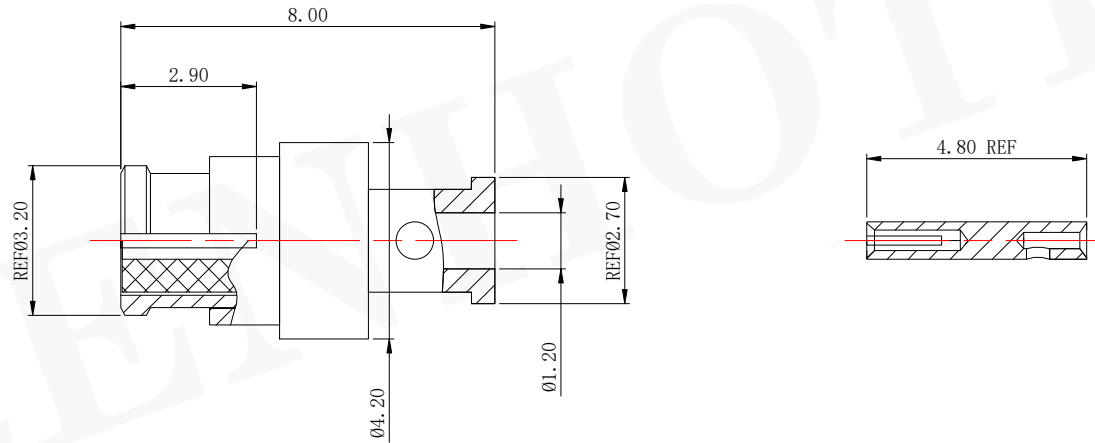

Specifications:
 IMPEDANCE: 50 Ohms
 Frequency range:DC-26.5GHZ
 VSWR:≤1.4
 Voltage Rating:335 Volts RMS Max Continuous
 Dielectric Withstanding Voltage:500 VRMS Min
 Center Contact Resistance:6 mΩ Max
 Outer Contact Resistance:2 mΩ Max
 Insulation resistance:5000 MOhms min
 Mating Cycles:100 Min
 Temperature range:-55°C TO +165°C

4	Center Pin	Beryllium Bronze	Gold Plating	1
3	Insulator	PTFE	NONE	1
2	Booy	Beryllium Bronze	Gold Plating	1
1	Booy	Brass	Gold Plating	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP				
	PART DESCRIPTION: SMP JACK FOR .047 CABLE				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.35mm 30 - 120mm ± 0.30mm	Appd: JIM.KING	P/N: RHT-628-2039			
	Check:	Date	Scale	Unit	Type
	Draw: Gavin	2023.05.13	Free	MM	Z
					Page
					1/1