



SP2915/S2 Waterproof Socket Rear-nut Mount 4 Hole Flange Solder

Part Number:

SP2915-S2



Basic Information

Connector Type	Socket
Contact Termination	Solder
Contact Type	Female Pin
Fastening Type	Threaded
Mounting Feature	4 Hole Flange
Mounting Type	Panel Mount
Number of Positions	2 Pin
Orientation	Straight
Shell Size	M29

Material Specification

Contact Finish	Gold Plating
Contact Material	Copper Alloy
Insulation Material	PPS
Shell Material	Copper Alloy

Electrical Specification

Rated Current	50A
Rated Voltage	500V

Environmental Specification

Ingress Protection	IP68
Operating Temperature	-40°C ~ + 85°C


electronic_specification

Shielding	Unshielded
-----------	------------

Contact Layout

芯数 Number of contact	2	3	4	5	5B	5C	6	6B	7	8	9	12	15
公端绝缘体正面图 Male contact face view													

Size

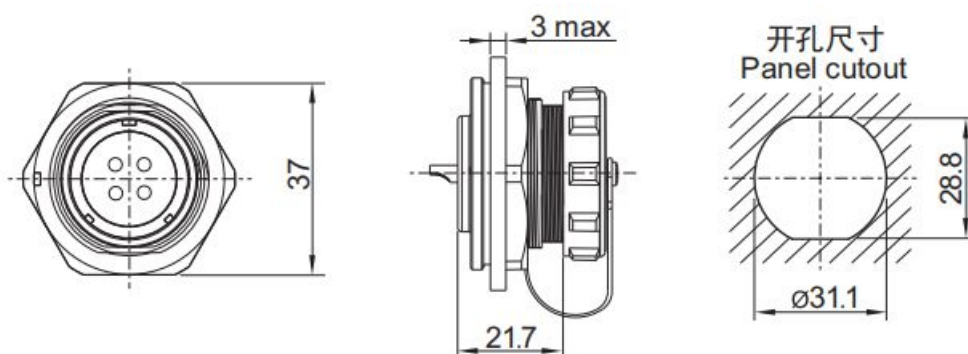

How to Order

SP2910 / P — — **SP2910 / S** — —
 插针 Male contact
 1:焊接 (不标), 2:螺丝压接, 3:压接
 1:solder, 2:screw, 3:crimp
 电缆直径: Cable outer diameter range
 I: 9-13mm II: 13-16mm (不标)
 芯数 Number of contact
 插孔 Female contact

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.