



13/16"-28UNS USB3.0 Rear Fastened Quick Lock Receptacle with Wires

Part Number:

RHT-693-1926

Basic Information

Connection Type	Panel Mount
Fastening Type	Threaded
Number of Positions	9 Pin
USB Type	USB 3.0
Certificate	IEC 11801

Electrical Specification

Contact Resistance	$\leq 30\text{m}\Omega$
Insulation Resistance	$\geq 100\text{m}\Omega$ at DC300V
Rated Current	1.5A
Rated Voltage	$\geq \text{AC } 500\text{V} / 1\text{min}$

Environmental Specification

Ingress Protection	IP67
Operating Temperature	$-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$


Mechanical Specification

Mechanical and Working Life	500 Cycles
-----------------------------	------------

Material Specification

Shell Material	Plastic
----------------	---------

Size

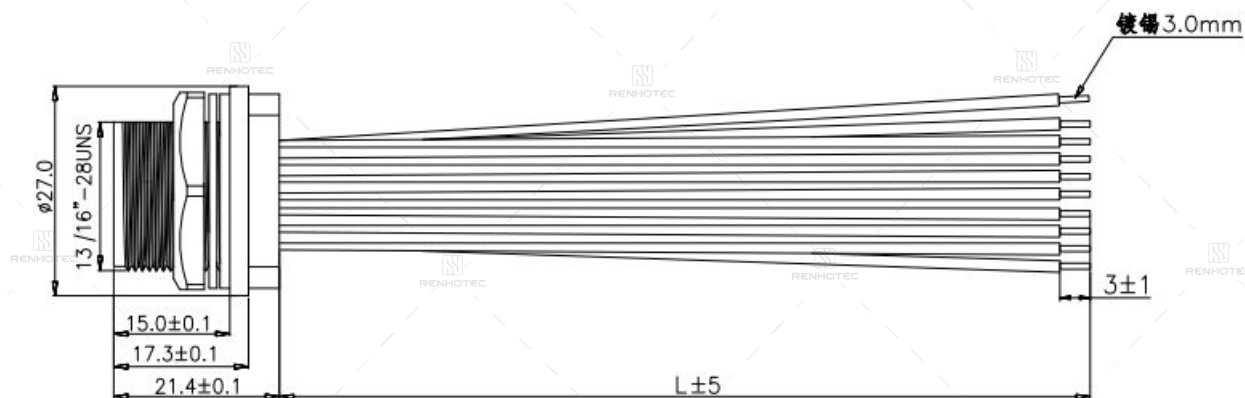

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.