



RMG Series RMG6FS 6P Male In-Line Connector

Part Number:

RMG6MP

Basic Information

Connector Type	Plug
Contact Type	Male
Number of Positions	6 Pin

Material Specification

Contact Material	Gold-plated Copper
Shell Material	Neoprene Rubber
Suitable Cable	20AWG

Electrical Specification

Contact Resistance	<0.01Ω
Insulation Resistance	>200MΩ


Mechanical Specification

Electrical Parameters	300V@3-6Amp
Number of Insertions and Removals	>500


Environmental Specification

Operating Temperature	-4°C – +60°C
Working Depth	6000 meters

Contact Layout

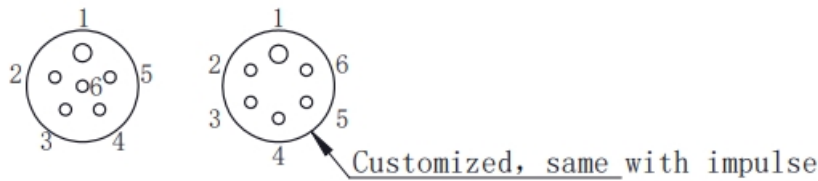


Size

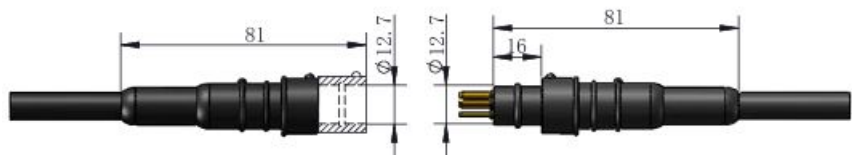

How to Order

Connectors	Locking Sleeves
S: Subminiature MC: Micro LP: Flat Shape HP: High Power BH: Bulkhead IL: Inline DO: Dummy RA: Right Angle Z: Pin Number F: Female Pin M: Male Pin SS: Made from stainless steel TI: Made from titanium alloy	DSL: Polyoxymethylene MOXLS: Micro Polyoxymethylene A: 2, 3, 46SPin Micro: 10, 12&16Pin B: 1, 6, 8&10Pin O: 12&16Pin F: Female M: Male

Coaxial Series and Split-petal Series

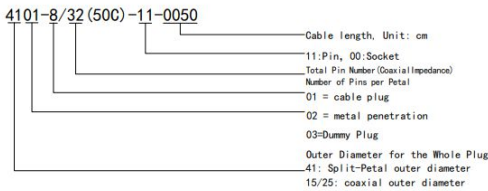

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.