

**ZH127 Series Connector Shell Size 12 19pin Male Flange
Socket Solder - CHЦ127-19/12БП127-1-В**

Part Number:

ZH127-19_12B12Z-1-B

Basic Information

Connector Type	Socket
Contact Type	Male
Mounting Type	Panel Mount
Fastening Type	Bayonet Connection
Termination	Solder
Shell Size	12
Number of Positions	19
Orientation	Straight

Compatible Part Numbers

Russian P/N	CHЦ127-19/12БП127-1-В
-------------	-----------------------

Material Specification

Contact Material	Gold/Silver plating
Shell Material	Aluminum alloy

Environmental Specification

Vibration	1-5000Hz 20g
Operating Temperature	-60 °C ~ +105 °C


Electrical Specification

Insulating Materials	Bakelite
Insulation Impedance	$\geq 5000\text{M}\Omega$
Contact Resistance	$\leq 5\text{m}\Omega$
Operating Current	1.7A
Operating Voltage	150V


Mechanical Specification

Mechanical and Working Life	500 cycles
Contact Dia.	$\varnothing 0.6\text{ mm}$

Contact Layout



Size

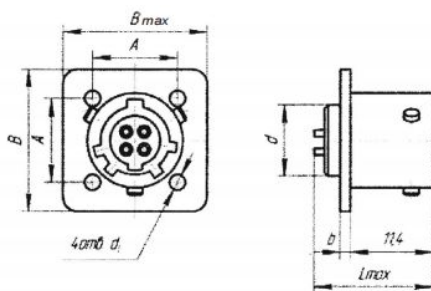

Shell size	d	d1	A	B	b	Lmax
10	10	2.2	11.8	20	1.4	26
12	12	2.2	13.2	21	1.4	26
14	14	2.2	15	24	1.4	26
18	18	2.2	18	27	1.4	26
22	22	2.7	21	31	1.8	26
27	27	3.2	26	36	2.0	26

How to Order

CHINESE									
ZH127-	4	/10	B(P)	1 (2)	1 (2)	Z	1	B	
Series									
Contacts:1/2/4/6/7/10/14/19/30/32/50/76/102									
Shell Size: 10/12/14/18/22/27									
Contacts gender: B(Male) P(Female)									
Connection Type (Socket Only) 1: Solder 2: PCB									
1: Gold Plating 2: Silver Plating									
W-Plug with angled tail attachment Q-Plug with straight tail attachment Z-Four-hole flange socket Y-Plug with short sleeve tail attachment									
Positioning Direction: 1-20									
All-climate Version									

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.