



MIL-DTL-38999 Series III Connector, d38999-24wc4sn  
Female Receptacle, No.13 Shell 4 Pin Crimp, N  
Orientation

Part Number:

**D38999-24WC4SN**

### Basic Information

|                     |                          |
|---------------------|--------------------------|
| Series              | MIL-DTL-38999 Series III |
| Connector Type      | Receptacle               |
| Orientation         | Straight                 |
| Contact Type        | Female                   |
| Number Of Positions | 4                        |
| Shell Size          | 13                       |
| Contact Layout      | 13-4                     |
| Fastening Type      | Thread                   |
| Mount Type          | Cable                    |
| Contact Termination | Crimp                    |
| Key                 | N                        |

### material\_specification

|                     |                    |
|---------------------|--------------------|
| Shell Material      | Aluminum Alloy     |
| Shell Finish        | Cadmium olive drab |
| Insulation Material | PPS                |
| Contact Material    | Copper Alloy       |
| Contact Finish      | Gold               |
| Shell Color         | Olive Drab         |


### Environmental Specification

|                       |                 |
|-----------------------|-----------------|
| Protection Rating     | IP67            |
| Operating Temperature | -65°C to +175°C |

## Electronic Specification


|               |        |
|---------------|--------|
| Shielding     | Shield |
| Rated Current | 5A     |

## Contact Layout



## Size

Jam Nut Receptacle (D38999/24)

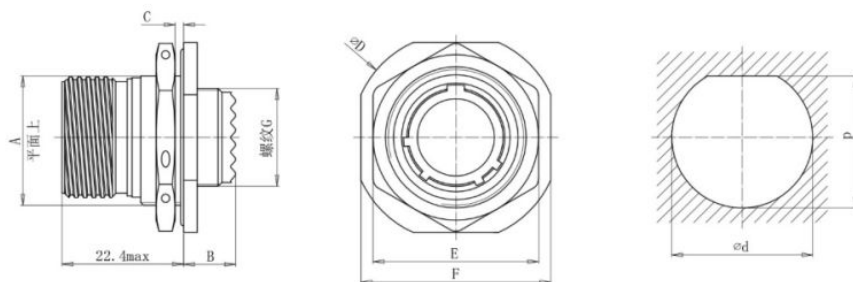

| Shell size | MS Shell size | A    | B max | C max | D max | E    | F    | G Thread   | d     | P     |
|------------|---------------|------|-------|-------|-------|------|------|------------|-------|-------|
| 9          | A             | 16.5 | 9.9   | 3.2   | 30.5  | 22.5 | 27.1 | M12×1.0-6g | 17.70 | 17.00 |
| 11         | B             | 19.2 | 9.9   | 3.2   | 35.2  | 25.7 | 32.1 | M15×1.0-6g | 20.88 | 19.53 |
| 13         | C             | 23.8 | 9.9   | 3.2   | 38.4  | 30.5 | 35.0 | M18×1.0-6g | 25.58 | 24.26 |
| 15         | D             | 26.9 | 9.9   | 3.2   | 41.6  | 33.6 | 38.3 | M22×1.0-6g | 28.80 | 27.53 |
| 17         | E             | 30.3 | 9.9   | 3.2   | 44.8  | 36.8 | 41.8 | M25×1.0-6g | 32.01 | 30.73 |
| 19         | F             | 33.4 | 9.9   | 3.2   | 49.3  | 40.0 | 46.4 | M28×1.0-6g | 35.15 | 33.86 |
| 21         | G             | 36.5 | 9.9   | 3.2   | 52.7  | 43.2 | 49.6 | M31×1.0-6g | 38.28 | 37.06 |
| 23         | H             | 39.7 | 9.9   | 3.2   | 55.9  | 46.3 | 52.8 | M34×1.0-6g | 41.53 | 40.26 |

## Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.