




4	5	6
发行版本 Revision	修改内容 Description	制图 Drawing
A	First release	Riky
		日期 Date
		2025.03.29

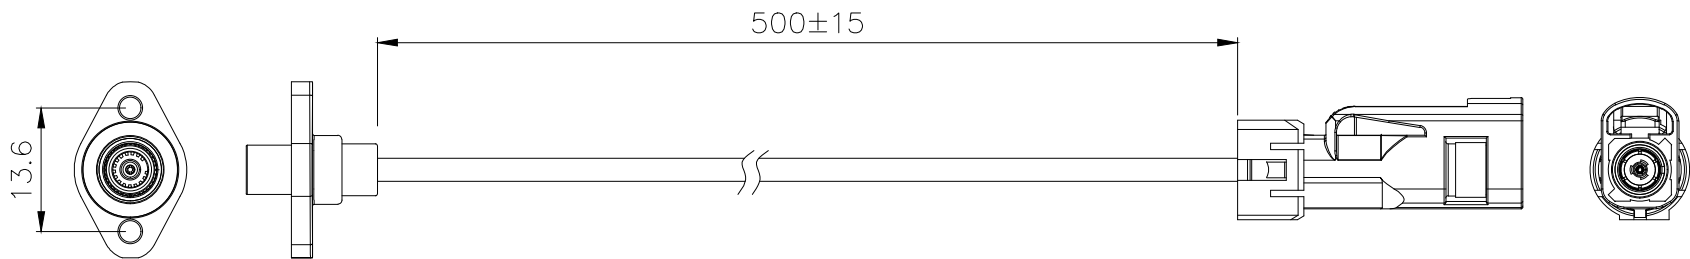

- Performance requirements:
- 1 Contact resistance: 10mΩ Max(inner conductor)
5mΩ Max(Outer conductor)
 - 2 Insulation resistance: 100 megohm minimum
 - 3 Withstand voltage: 500 V AC,1 minute
 - 4 Operating temperature : -40°C~105°C
 - 5 Frequency : 0~3GHz
 - 6 Characteristic impedance: 50Ω
 - 7 After the cable is assembled, the axial pulling force is greater than orequal to 110N

3	SMB STRAIGHT FEMALE	1	SET
2	Original ROSENBERGER MALE CONNECTOR 59Z163-003-Z	1	SET
1	LEONI COAX CABLE DACAR 462	/	MM
ITEM	DESCRIPTION	QTY	UNIT

 仁昊伟业 RENHOTECH RENHOTECH GROUP					
客户料号 Cus'P/N		料号 P/N	RHT-605-20795	品名 Name	Waterproof FAKRA to SMB Cable with 2-Hole Flange Mount
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	A
线性 Linear	0.5~6	±0.2	比例 Scale		图纸确认 DRAWING
	>6~30	±0.3			Riky
	>30	±2%			审核 Checked
角度Angles	±3°		页码 Page	1 / 1	客户确认 Customer Approved
				Third Angle Projection	