




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A	First release	Riky	2025.03.29

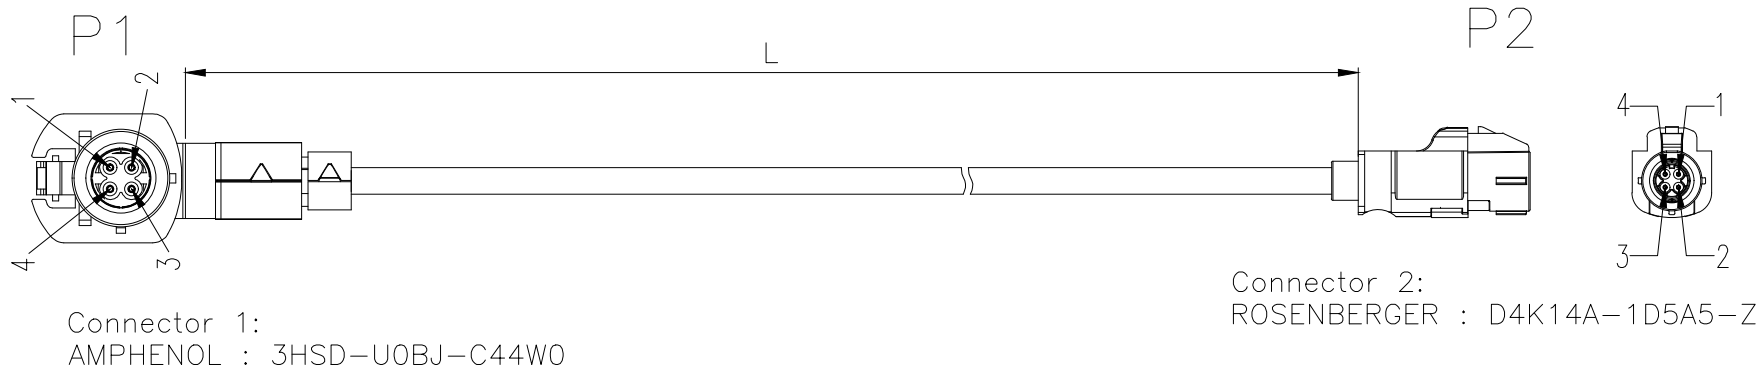

1.Electrical Performance:

A.Impedance	100 OHM NOMINAL
B.Frequency Range	DC-2GHZ
C.Hi-Pot	500 VRMS MIN
D.Continuity	100% TEST

2.Mechanical:


A.Cable Retention	110N MIN
B.Temperature Range	-40°C TO 105°C

CONNECTOR P1	CONNECTOR P2
1 — BLUE	4 —
2 — ORANGE	3 —
3 — GREEN	2 —
4 — BROWN	1 —
SHELL — BRAID	SHELL —

PART NO.	LENGTH
RHT-605-20805-0.5M	500±10
RHT-605-20805-1M	1000±15
RHT-605-20805-2M	2000±20



RENHOTEC GROUP

客户料号 Cus/P/N		料 号 P/N		RHT-605-20805		品 名 Name	Right Angled HSD LVDS Cable O Coded to Z Coded	
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	A	图纸确认 APPROVAL		日期 Date
线性 Linear	0.5~6	±0.2	比例 Scale	—		绘 图 Drawing	Riky	2025.03.29
	>6~30	±0.3				审 核 Checked	Jason	2025.03.29
	>30	±2%				客 户 确 认 Customer Approved		
角度Angles	±3°		页 码 Page	1 / 1		Third Angle Projection		

3	Original AMPHENOL MALE CONNECTOR 3HSD-U0BJ-C44W0	1	SET
2	Original ROSENBERGER MALE CONNECTOR D4K14A-1D5A5-Z	1	SET
1	LEONI HSD/LVDS CABLE DACAR 535	/	MM
ITEM	DESCRIPTION	QTY	UNIT