




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A	First release	Riky	2025.03.29

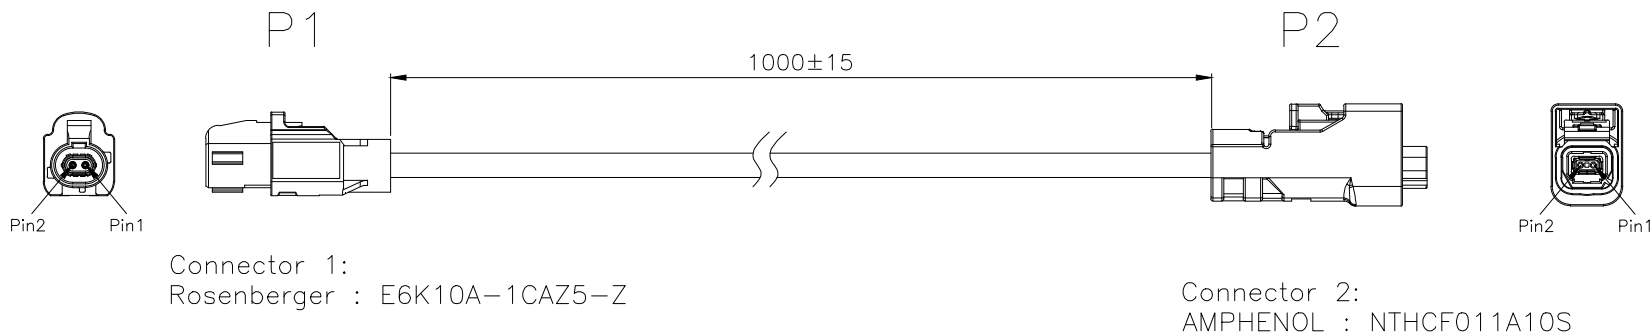


- 1.Electrical:
- A.Impedance 50 OHM NOMINAL
- B.Frequency Range DC-6GHZ
- C.VSWR 1.800 MAX
- D.Hi-Pot 800 VRMS MIN
- E.Continuity 100% TEST

- 2.Mechanical:
- A.Cable Retention 110N MIN.
- B.Tempereture Range -40°C TO 105°C

CONNECTOR P1	CONNECTOR P2
Pin 1 — White — Pin 1	Pin 1
Pin 2 — Green — Pin 2	Pin 2

3	Original AMPHENOL CONNECTOR NTHCF011A10S	1	SET
2	Original ROSENBERGER H-MTD CONNECTOR E6K10A-ICAZ5-Z	1	SET
1	G&G 10 GBPS ETHERNET CABLE GG 2Spead 251	/	MM
ITEM	DESCRIPTION	QTY	UNIT

 仁昊伟业 RENHOTECH RENHOTECH GROUP										
客户料号 Cus'P/N				料 号 P/N		RHT-605-20830		品 名 Name	NET Bridge to H-MTD Automotive Ethernet Cable	
未注公差 Unless Otherwise Specified			单 位 Unit	mm	版 本 Revision	A		图纸确认 APPROVAL		日期 Date
线性 Linear	0.5~6	±0.2	比 例 Scale	--		绘 图 Drawing		Riky	2025.03.29	
	>6~30	±0.3				审 核 Checked		Jason	2025.03.29	
	>30	±2%				客户确认 Customer Approved				
角度Angles		±3°		页 码 Page	1 / 1		Third Angle Projection			