




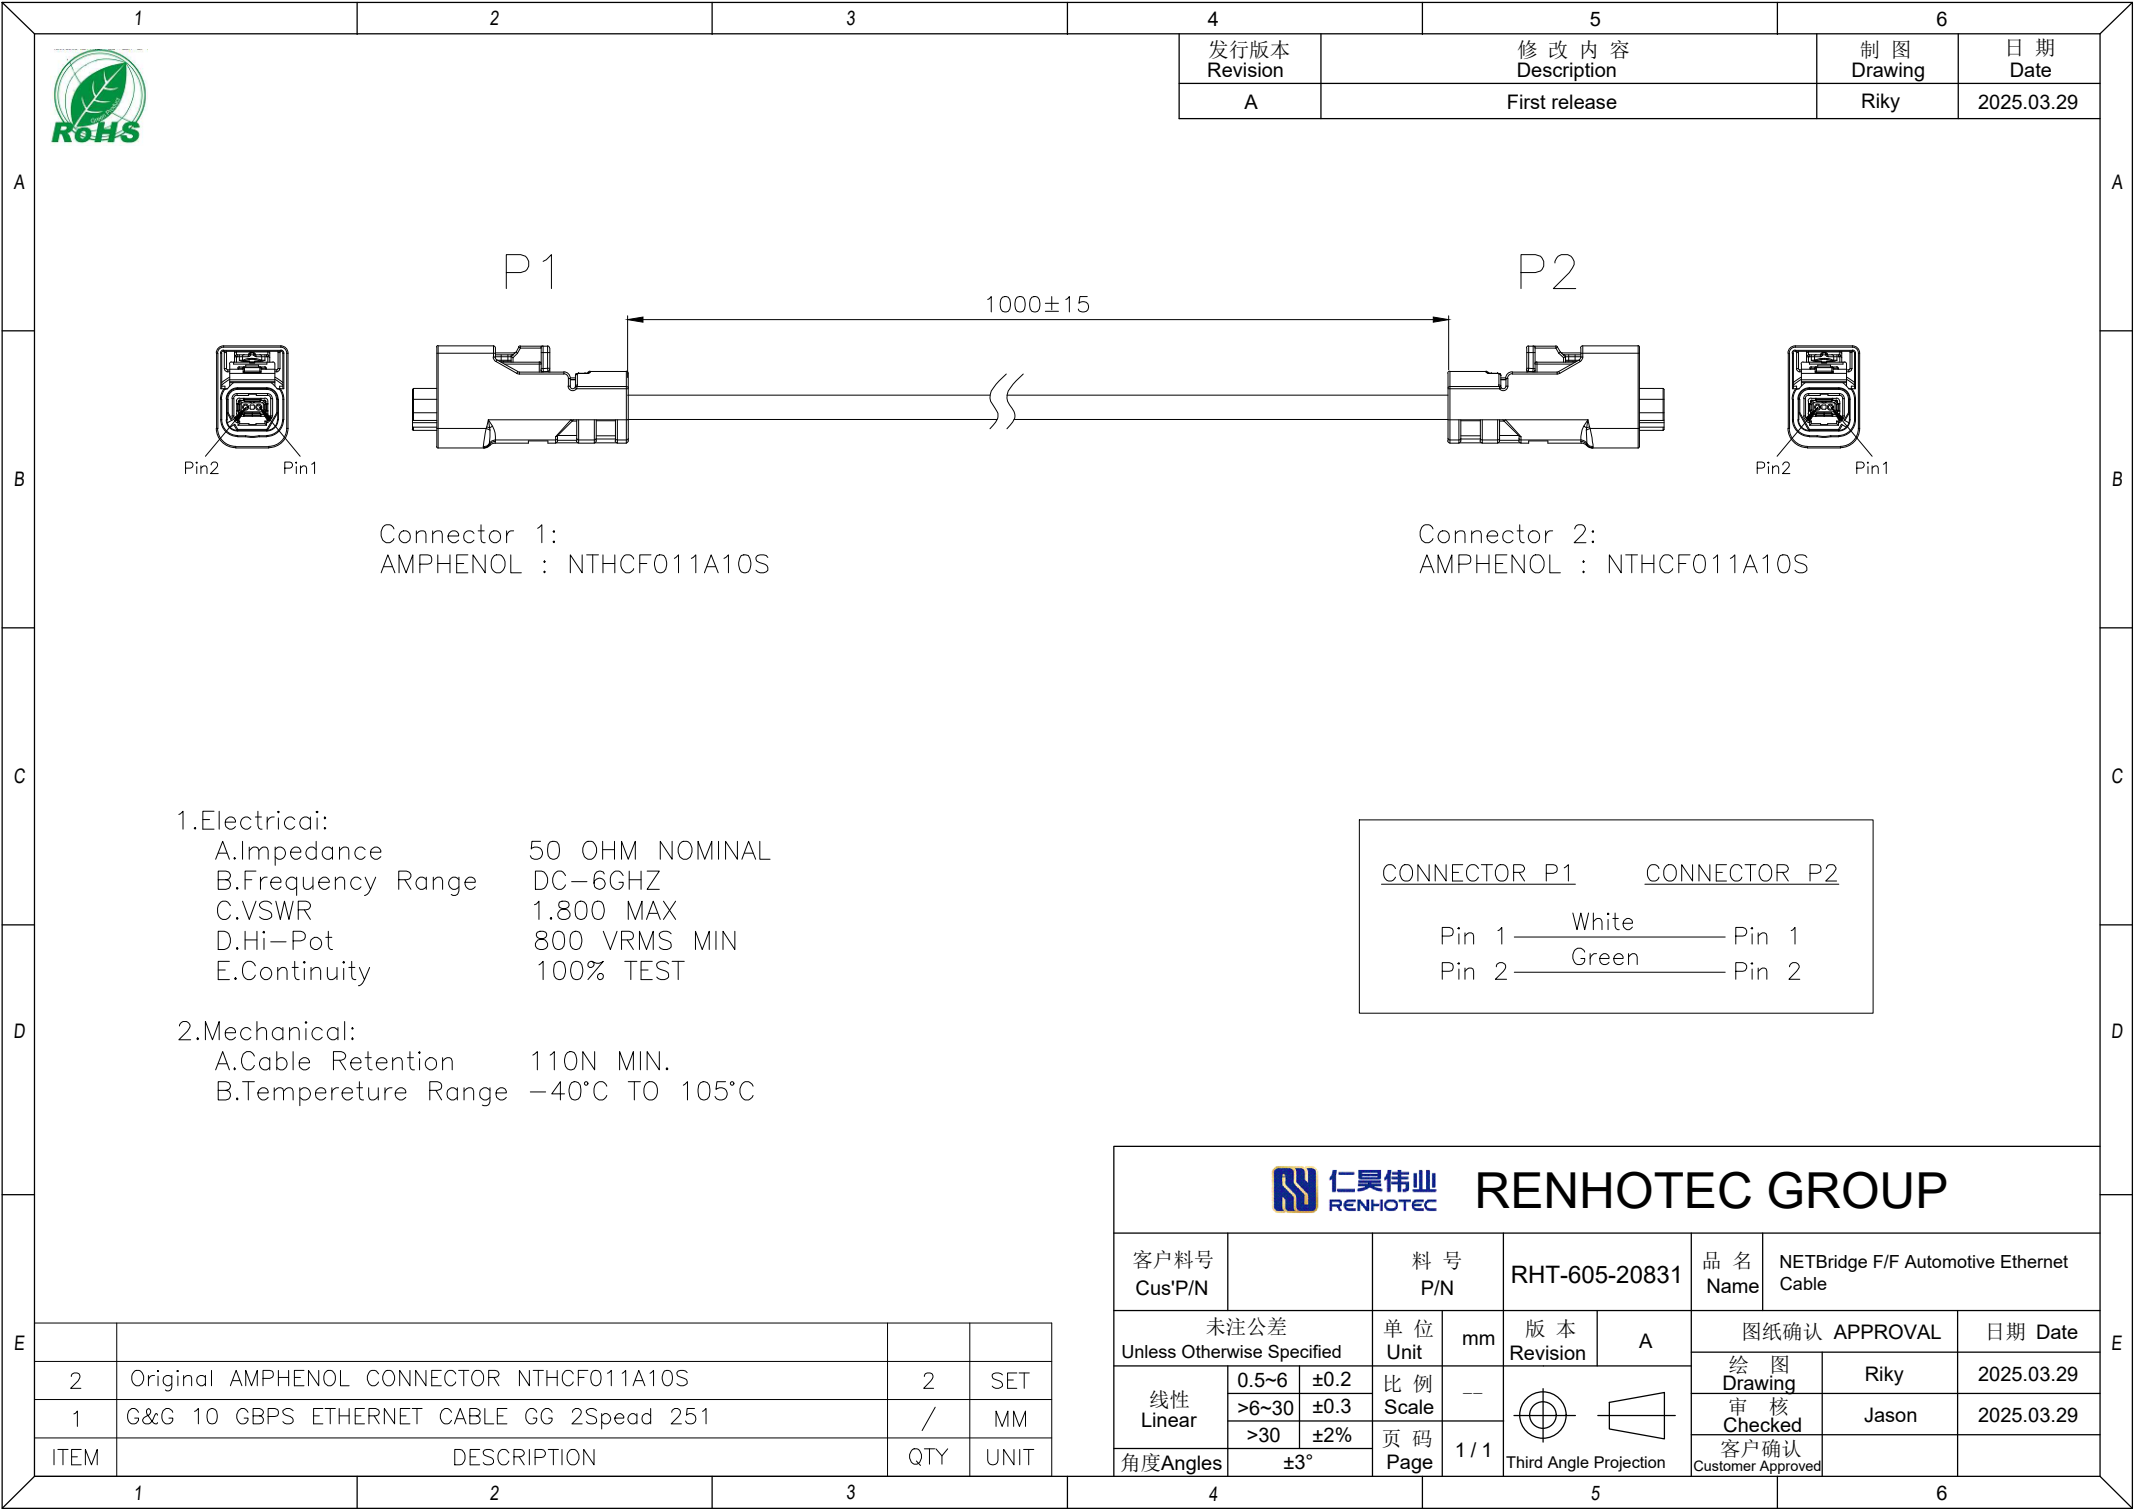

发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A	First release	Riky	2025.03.29



Connector 1:
AMPHENOL : NTHCF011A10S




Connector 2:
AMPHENOL : NTHCF011A10S

- 1.Electrical:
- A.Impedance 50 OHM NOMINAL
 - B.Frequency Range DC-6GHZ
 - C.VSWR 1.800 MAX
 - D.Hi-Pot 800 VRMS MIN
 - E.Continuity 100% TEST
- 2.Mechanical:
- A.Cable Retention 110N MIN.
 - B.Temperature Range -40°C TO 105°C

CONNECTOR P1	CONNECTOR P2
Pin 1 — White — Pin 1	Pin 1 — White — Pin 1
Pin 2 — Green — Pin 2	Pin 2 — Green — Pin 2

ITEM	DESCRIPTION	QTY	UNIT
2	Original AMPHENOL CONNECTOR NTHCF011A10S	2	SET
1	G&G 10 GBPS ETHERNET CABLE GG 2Spaad 251	/	MM

 RENHOTECH GROUP					
客户料号 Cus'P/N		料号 P/N	RHT-605-20831	品名 Name	NETBridge F/F Automotive Ethernet Cable
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	A
线性 Linear	0.5~6	±0.2	比例 Scale		图纸确认 DRAWING
	>6~30	±0.3			Riky
	>30	±2%			审核 Checked
角度Angles	±3°		页码 Page	1 / 1	客户确认 Customer Approved