





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A	First release	Riky	2025.03.29

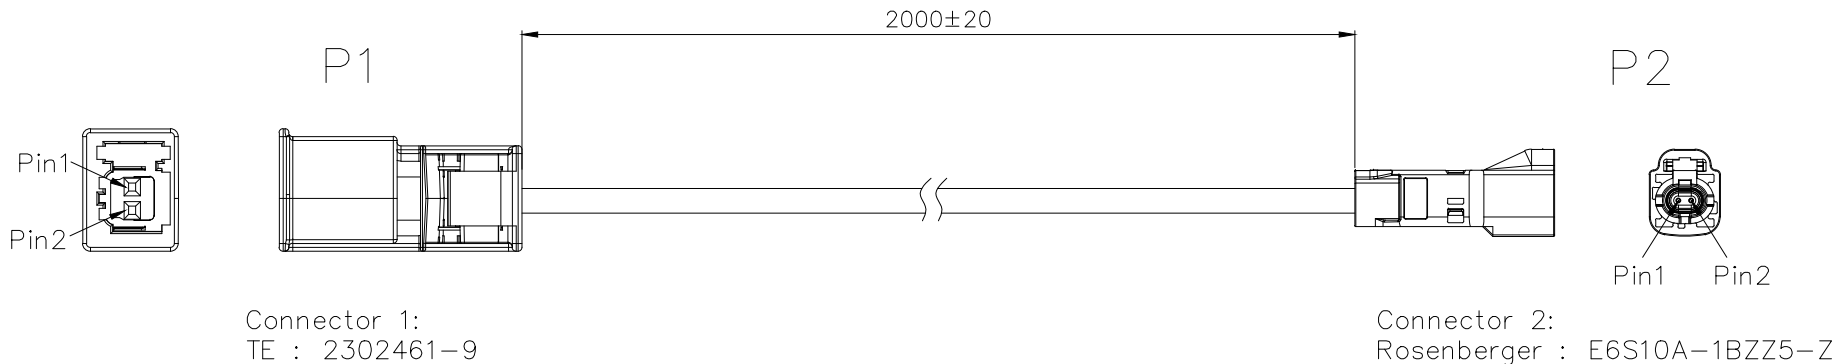

- 1.Electrical performance:
- A.Impedance 100 OHM NOMINAL
 - B.Frequency Range DC-10GHZ
 - C.VSWR 1.800 MAX
 - D.Hi-Pot 800 VRMS MIN
 - E.Continuity 100% TEST
 - F.Components and wiring harness are presented only schematically

- 2.Mechanical:
- A.Cable Retention 110N MIN.
 - B.Temperature Range -40°C TO 105°C

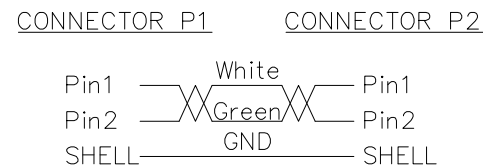

RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N		RHT-605-20832		品 名 Name	Rosenberger H-MTD to TE MATEnet Automotive Ethernet Cable		
未注公差 Unless Otherwise Specified			单 位 Unit	mm	版 本 Revision	A	图纸确认 APPROVAL		日期 Date
线性 Linear	0.5~6	±0.2	比 例 Scale	—			绘 图 Drawing	Riky	2025.03.29
	>6~30	±0.3					审 核 Checked	Jason	2025.03.29
	>30	±2%					客户确认 Customer Approved		
角度Angles	±3°		页 码 Page	1 / 1			Third Angle Projection		

3	Original ROSENBERGER H-MTD CONNECTOR E6S10A-1BZZ5-Z	1	SET
2	Original TE CONNECTOR 2302461-9	1	SET
1	LEONI GBPS ETHERNET CABLE DACAR 647-4	/	MM
ITEM	DESCRIPTION	QTY	UNIT