





4		5		6	
发行版本 Revision		修改内容 Description		制图 Drawing	日期 Date
A		First release		Riky	2025.03.29

P1



CONNECTOE 1:
HSD 4P FEMALE

500±15

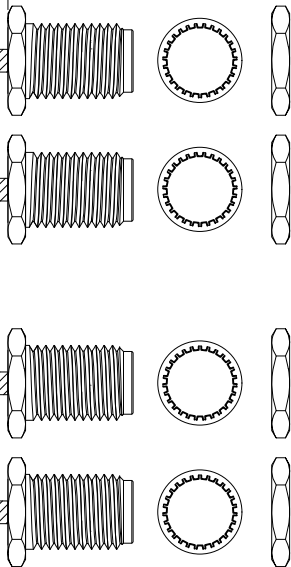

CONNECTOE 2/3/4/5:
SMA FEMALE

1.Electrical Performance:

A.Impedance	50 OHM NOMINAL
B.Frequency Range	DC-6GHZ
C.VSWR	1.800 MAX.
D.Hi-Pot	500 VRMS MIN
E.Continuity	100% TEST

2.Mechanical:

A.Cable Retention	110N MIN
B.Temperature Range	-40°C TO 105°C

3	HSD 4P FEMALE	1	SET	
2	SMA FEMALE	4	SET	
1	RG316 double shielding OD2.95 Brown FEP	/	MM	
ITEM	DESCRIPTION	QTY	UNIT	

 RENHOTEC GROUP					
客户料号 Cus'P/N		料号 P/N	RHT-605-20846	品名 Name	HSD Z Female to 4 SMA Female Cable
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	A
线性 Linear	0.5~6	±0.2	比例 Scale		图纸确认 DRAWING
	>6~30	±0.3			Riky
	>30	±2%			2025.03.29
角度Angles	±3°		页码 Page	1 / 1	审核 Checked
				客户确认 Customer Approved	