




4	5	6
发行版本 Revision	修改内容 Description	制图 Drawing
A	First release	Riky
		日期 Date
		2025.03.29

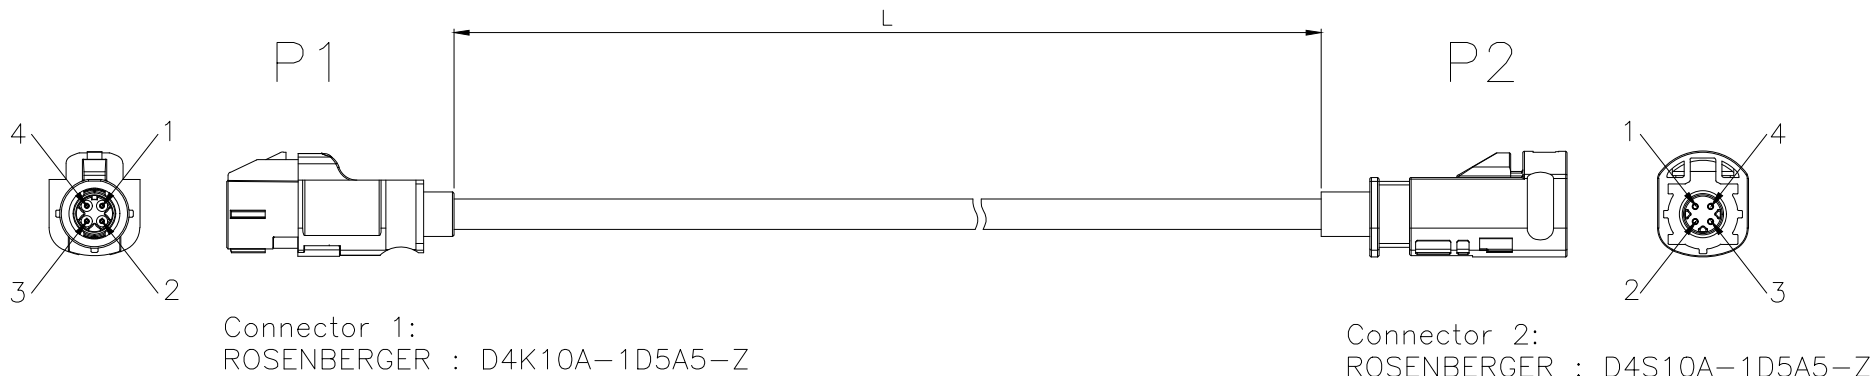

1.Electrical Performance:

A.Impedance	100 OHM NOMINAL
B.Frequency Range	DC-2GHZ
C.Hi-Pot	500 VRMS MIN
D.Continuity	100% TEST

2.Mechanical:

A.Cable Retention	110N MIN
B.Temperature Range	-40°C TO 105°C

CONNECTOR P1	CONNECTOR P2
1 BLUE	4
2 ORANGE	3
3 GREEN	2
4 BROWN	1
SHELL BRAID	SHELL

PART NO.	LENGTH
RHT-605-20848-0.5M	500±10
RHT-605-20848-1M	1000±15
RHT-605-20848-2M	2000±20

3	Original ROSENBERGER MALE CONNECTOR D4S10A-1D5A5-Z	1	SET
2	Original ROSENBERGER MALE CONNECTOR D4K10A-1D5A5-Z	1	SET
1	LEONI HSD/LVDS CABLE DACAR 535	/	MM
ITEM	DESCRIPTION	QTY	UNIT



RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N		RHT-605-20848		品 名 Name	HSD Male to Female Extension Cable		
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	A	图 纸 确 认 APPROVAL		日 期 Date	
线性 Linear	0.5~6	±0.2	比 例 Scale	—		绘 图 Drawing		Riky	2025.03.29
	>6~30	±0.3				审 核 Checked		Jason	2025.03.29
	>30	±2%							
角度Angles	±3°		页 码 Page	1 / 1		Third Angle Projection 客户确认 Customer Approved			