




4		5		6	
发行版本 Revision		修改内容 Description		制图 Drawing	日期 Date
A		First release		Riky	2025.03.29

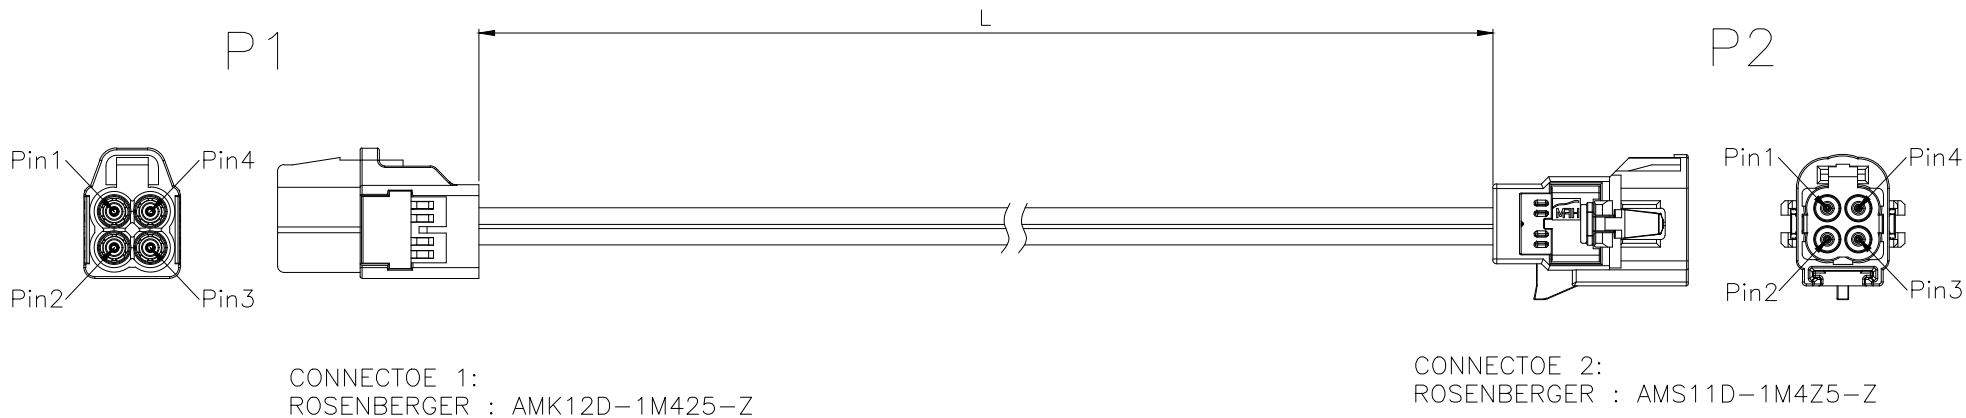

1.Electrical Performance:

A.Impedance	50 OHM NOMINAL
B.Frequency Range	DC-6GHZ
C.VSWR	1.800 MAX.
D.Hi-Pot	800 VRMS MIN
E.Continuity	100% TEST

2.Mechanical:

A.Cable Retention	110N MIN
B.Temperature Range	-40°C TO 105°C


CONNECTOR P1	CONNECTOR P2
Pin1	Pin1
Pin2	Pin2
Pin3	Pin3
Pin4	Pin4

PART NO.	LENGTH
RHT-605-20852-1M	1000±15
RHT-605-20852-2M	2000±20

ITEM	DESCRIPTION	QTY	UNIT
3	Original ROSENBERGER CONNECTOR AMK12D-1M425-Z	1	SET
2	Original ROSENBERGER CONNECTOR AMS11D-1M4Z5-Z	1	SET
1	LEONI COAX CABLE DACAR 302-4	/	MM



RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N		RHT-605-20852		品 名 Name	4-in-1 Mini FAKRA Male to Female Extension Cable		
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	A	图纸确认 APPROVAL		日期 Date	
线性 Linear	0.5~6	±0.2	比 例 Scale	—		绘 图 Drawing	Riky	2025.03.29	
	>6~30	±0.3				审 核 Checked	Jason	2025.03.29	
	>30	±2%							
角度Angles	±3°		页 码 Page	1 / 1	Third Angle Projection		客户确认 Customer Approved		