




4	5	6
发行版本 Revision	修改内容 Description	制图 Drawing
A	First release	Riky
		日期 Date
		2025.03.29

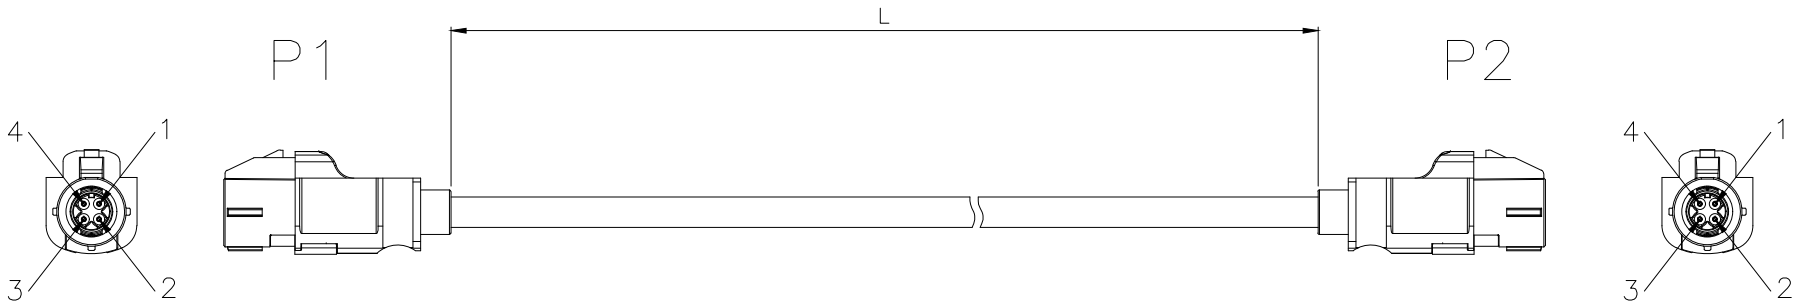

Connector 1:
ROSENBERGER : D4K10A-1D5A5-Z

Connector 2:
ROSENBERGER : D4K10A-1D5A5-Z

1.Electrical Performance:

A.Impedance	100 OHM NOMINAL
B.Frequency Range	DC-2GHZ
C.Hi-Pot	500 VRMS MIN
D.Continuity	100% TEST


2.Mechanical:

A.Cable Retention	110N MIN
B.Temperature Range	-40°C TO 105°C

CONNECTOR P1	CONNECTOR P2
1 BLUE	4
2 ORANGE	3
3 GREEN	2
4 BROWN	1
SHELL BRAID	SHELL

PART NO.	LENGTH
RHT-605-20870-0.5M	500±10
RHT-605-20870-1M	1000±15
RHT-605-20870-2M	2000±20

2	Original ROSENBERGER MALE CONNECTOR D4K10A-1D5A5-Z	2	SET
1	LEONI HSD/LVDS CABLE DACAR 535	/	MM
ITEM	DESCRIPTION	QTY	UNIT

 仁昊伟业 RENHOTECH						RENHOTECH GROUP		
客户料号 Cus'P/N		料号 P/N	RHT-605-20870		品名 Name	Automotive HSD LVDS Cable Assembly		
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	A	图纸确认 APPROVAL	日期 Date	
线性 Linear	0.5~6	±0.2	比例 Scale	—		绘图 Drawing	Riky	2025.03.29
	>6~30	±0.3				审核 Checked	Jason	2025.03.29
	>30	±2%				客户确认 Customer Approved		
角度Angles	±3°		页码 Page	1 / 1	Third Angle Projection			