




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A	First release	Riky	2025.03.29

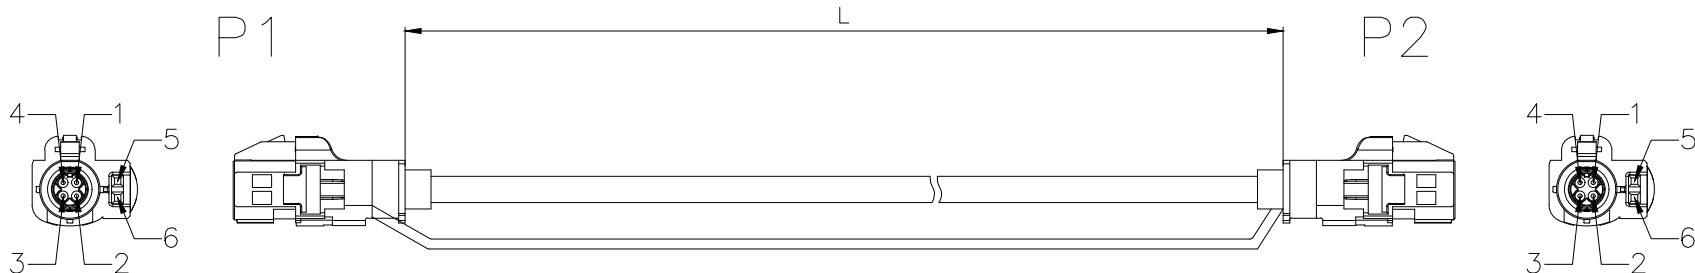

Connector 1:
AMPHENOL : HSD2NZSJ-C44W0

Connector 2:
AMPHENOL : HSD2NZSJ-C44W0

1.Electrical Performance:

A.Impedance	100 OHM NOMINAL
B.Frequency Range	DC-2GHZ
C.Hi-Pot	500 VRMS MIN
D.Continuity	100% TEST

2.Mechanical:

A.Cable Retention	110N MIN
B.Temperature Range	-40°C TO 105°C

CONNECTOR P1 CONNECTOR P2

1	BLUE	4
2	ORANGE	3
3	GREEN	2
4	BROWN	1
SHELL	BRAID	SHELL
5	RED	5
6	BLACK	6

PART NO.	LENGTH
RHT-605-20875-0.5M	500±10
RHT-605-20875-1M	1000±15
RHT-605-20875-2M	2000±20

3	Black/Red Silicone Rubber Wire	/	MM
2	Originai AMPHENOL HSD CONNECTOR HSD2NZSJ-C44W0	2	SET
1	LEONI HSD/LVDS CABLE DACAR 535	/	MM
ITEM	DESCRIPTION	QTY	UNIT



RENHOTECH GROUP

客户料号 Cus/P/N			料 号 P/N		RHT-605-20875		品 名 Name		4+2P HSD LVDS Video Cable		
未注公差 Unless Otherwise Specified				单 位 Unit	mm	版 本 Revision	A		图纸确认 APPROVAL		日期 Date
线性 Linear		0.5~6	±0.2	比 例 Scale	--		绘 图 Drawing		Riky	2025.03.29	
		>6~30	±0.3				审 核 Checked		Jason	2025.03.29	
		>30	±2%								
角度Angles		±3°		页 码 Page	1 / 1		Third Angle Projection		客户确认 Customer Approved		