




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A	First release	Riky	2025.03.29

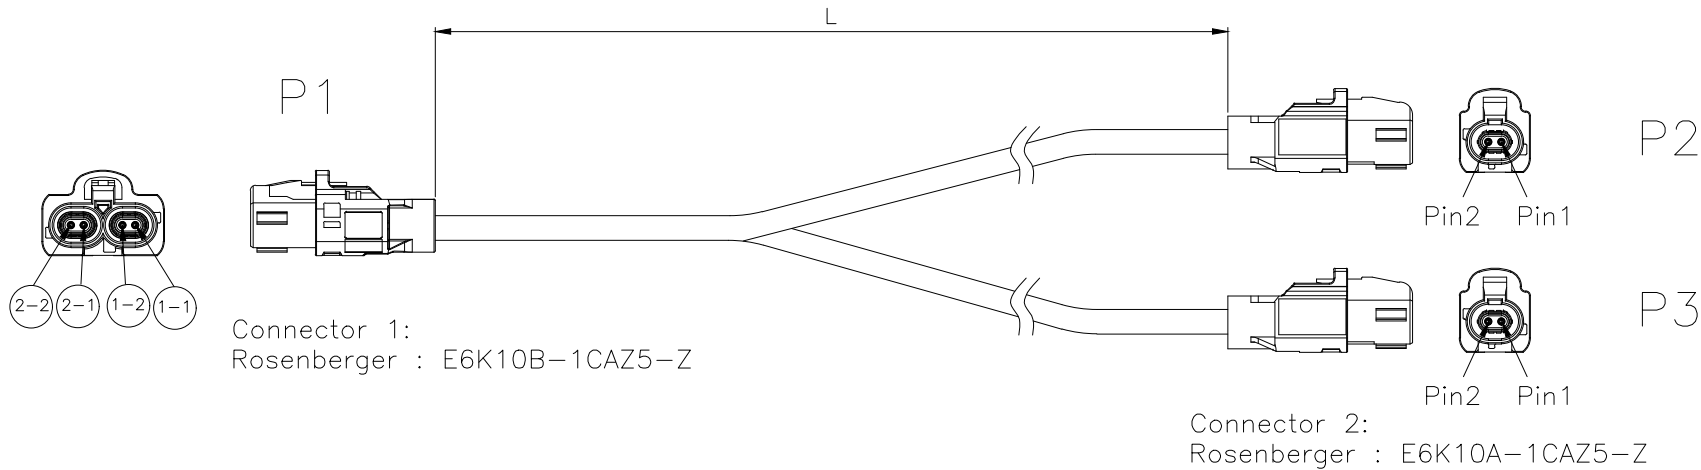

- 1.Electrical:
- A.Impedance 100 OHM NOMINAL
 - B.Frequency Range DC-10GHZ
 - C.Hi-Pot 500 VRMS MIN
 - D.Continuity 100% TEST
- 2.Mechanical:
- A.Cable Retention 110N MIN.
 - B.Temperature Range -40°C TO 105°C

CONNECTOR P1	CONNECTOR/
1-1 White	Pin1 P2
1-2 Green	Pin2 P2
2-1 White	Pin1 P3
2-2 Green	Pin2 P3

PART NO.	LENGTH
RHT-605-20878-0.5M	500±10
RHT-605-20878-1M	1000±15



RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N		RHT-605-20878		品 名 Name	2 in 1 H-MTD Cable for Automotive Ethernet		
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	A	图纸确认		APPROVAL	日期 Date
线性 Linear		0.5~6	±0.2	比例 Scale	--		绘 图 Drawing	Riky	2025.03.29
		>6~30	±0.3				审 核 Checked	Jason	2025.03.29
		>30	±2%				客 户 确 认 Customer Approved		
角度Angles		±3°		页 码 Page	1 / 1	Third Angle Projection			

3	Original ROSENBERGER H-MTD CONNECTOR E6K10A-1CAZ5-Z	2	SET
2	Original ROSENBERGER H-MTD CONNECTOR E6K10B-1CAZ5-Z	1	SET
1	G&G 10G ETHERNET CABLE GG2Speed 251	/	MM
ITEM	DESCRIPTION	QTY	UNIT