




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A	First release	Riky	2025.03.29

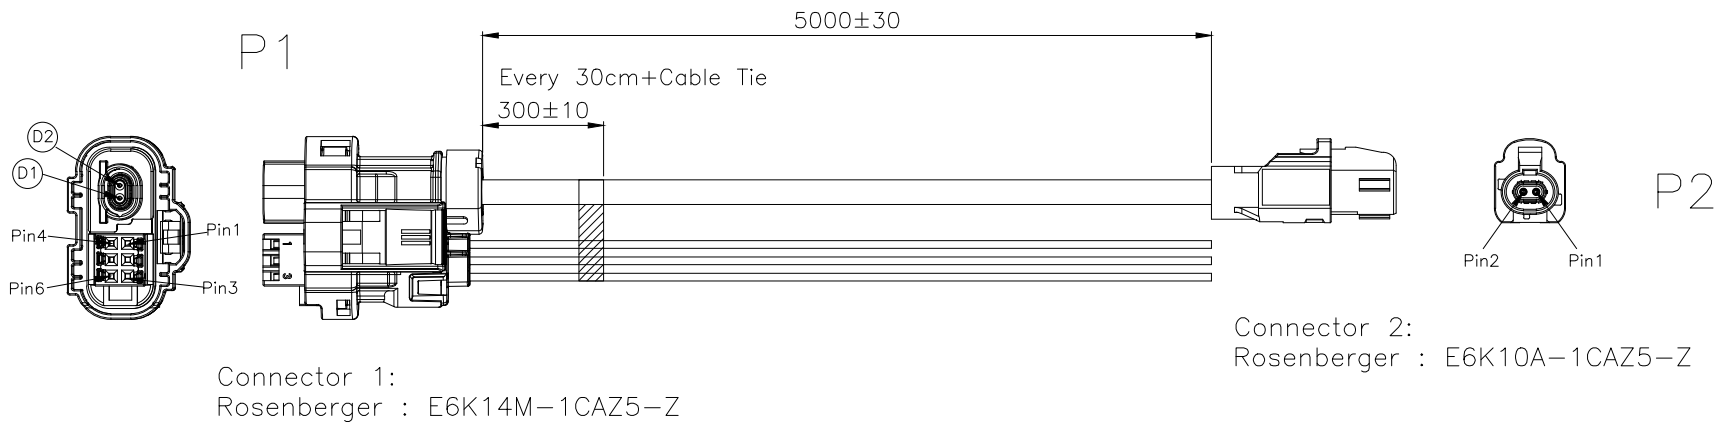

- 1.Electricai:
- A.Impedance 100 OHM NOMINAL
- B.Frequency Range DC-10GHZ
- C.Hi-Pot 500 VRMS MIN
- D.Continuity 100% TEST
- 2.Mechanical:
- A.Cable Retention 110N MIN.
- B.Tempereture Range -40°C TO 105°C

CONNECTOR P1		CONNECTOR P2	
D1	White	Pin1	
D2	Green	Pin2	
SHELL	GND	SHELL	
Pin1	20#Red	Open	
Pin2	22#White	Open	
Pin3	22#Green	Open	
Pin4	20#Black	Open	
Pin5	22#Blue	Open	
Pin6	22#Yellow	Open	

6	Fireproof fabric	/	
5	Original ROSENBERGER H-MTD CONNECTOR E6K10A-1CAZ5-Z	1	SET
4	Original ROSENBERGER H-MTD CONNECTOR E6K14M-1CAZ5-Z	1	SET
3	22AWG TEFLON WIRE White & Green & Blue & Yellow	/	MM
2	20AWG TEFLON WIRE Red & Black	/	MM
1	G&G 10G ETHERNET CABLE GG2Speed 251	/	MM
ITEM	DESCRIPTION	QTY	UNIT



RENHOTEC GROUP

客户料号 Cus'P/N		料号 P/N	RHT-605-20882	品名 Name	Waterproof H-MTD+6 Cable with MQS Contacts E6K14M-1CAZ5-Z	
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	A	图纸确认 APPROVAL
线性 Linear	0.5~6	±0.2	比例 Scale	页码 Page	1 / 1	绘图 Drawing
	>6~30	±0.3				审核 Checked
	>30	±2%				客户确认 Customer Approved
角度Angles	±3°					日期 Date
						Riky
						Jason
						2025.03.29
						2025.03.29