



GX30 3 Hole Flange Connector

Part No.:

GX30-E-2-P + GX30-A-2-S



Basic Information

Part No.	GX30-E-10-P + GX30-A-10-S, GX30-E-12-P + GX30-A-12-S, GX30-E-14-P + GX30-A-14-S, GX30-E-3-P + GX30-A-3-S, GX30-E-4-P + GX30-A-4-S, GX30-E-5-P + GX30-A-5-S, GX30-E-6-P + GX30-A-6-S, GX30-E-7-P + GX30-A-7-S, GX30-E-8-P + GX30-A-8-S, GX30-E-9-P + GX30-A-9-S
Series	GX30
Connection Type	Cable Plug, Panel Mount Receptacles
Orientation	Straight
Contacts	10 Pin, 12 Pin, 14 Pin, 2 Pin, 3 Pin, 4 Pin, 5 Pin, 6 Pin, 7 Pin, 8 Pin, 9 Pin
Coupling	Threaded Coupling
Gender	Female, Male
Termination	Solder
Mounting Feature	3 Hole Flange
Shell Material	Brass Nut, High Grade Copper Zinc Alloy
Color	Black, Blue, Gold, OEM, Silver, White
Contact Material	High Grade Copper(Silverplated/Gold)

material_specification

Insert Material	Bakelite
Wire Gauge	16-24 AWG

Mechanical Specifications

Mechanical Operation	>500 Mating Cycles
Acceleration	100m/s Square


Environmental Specification

Vibration Frequency	10~100Hz
Operating Temperature	-25°C ~ + 85°C

Contact Layout


2 Pin	3 Pin	4 Pin	5 Pin	6 Pin	7 Pin	8 Pin	10 Pin	12 Pin	14 Pin
									

Size

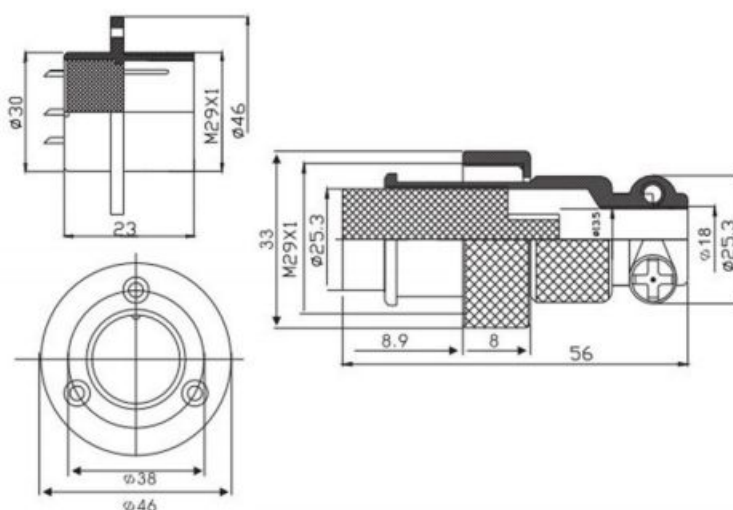

How to Order

Order P/N

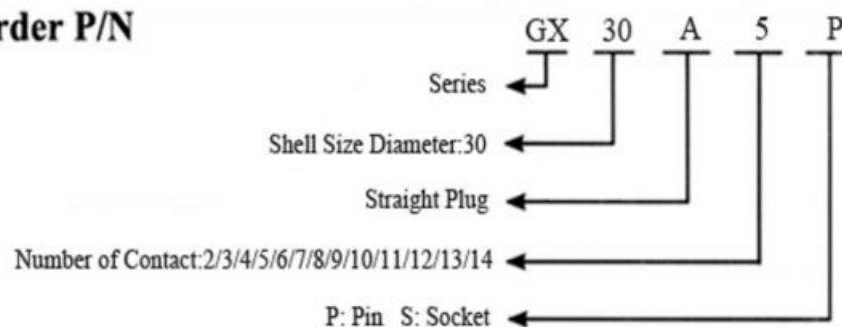

Note:

A: Straight Plug
 B: Panel Mount Socket
 K: Docking Cable Plug
 D: Angled Plug
 E: 3 Hole Circular Flange
 F: Bulkhead
 H: 4 Hole Square Flange

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.