

# 400A美规接插件 400A US gauge connector

## CEE/IEC国际标准 National standards

符合德国工业标准DIN VDE 0623, 欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2

### R-LOK单接点400A大功率凸轮式电源接头

单接点400A大功率凸轮式电源接头，非导电材质的锁紧螺丝穿过铜导线，将导线稳定固定在绝缘套中，不使用工具安装、拆卸方便，能与其它主国际主要品牌相同CAM式400A大功率凸轮式电源接头兼容，适用于室内外的舞台演出，电影拍摄，展览展示等暂时性电源供应，发动机，发电机等设备的专业接头。

### R-lok single contact 400A high-power CAM power connector

The single contact 400A high-power CAM power connector independently designed The locking screw of non-conductive material passes through the copper guide wire, Fix the guide pin in the insulation sleeve stably. Easy to install and remove without using tools. Can be compatible with other major international brands of CAM type 400A high-power CAM power connector, Suitable for indoor and outdoor stage performance, film shooting, exhibitions and other temporary power supply, engine, Professional connectors for generators and other equipment.




#### R-LOK400G

##### 线上电公插头

额定电压：600v最大  
接头材质：铜合金  
绝缘外壳：耐温范围-50~90°C  
适合线径编号：#6、#4、#2、2/0、4/0  
额定电流：400A最大  
锁紧螺丝材料：增强PA6

##### Cable plug


Rated voltage: 600V Max  
Joint material: copper alloy  
Insulation case: temperature resistance range -50 ~ 90°C  
Suitable line sizes: #6, #4, #2, 2/0, 4/0  
Rated current: 400A Max  
Locking screw material: PA6 enhancement

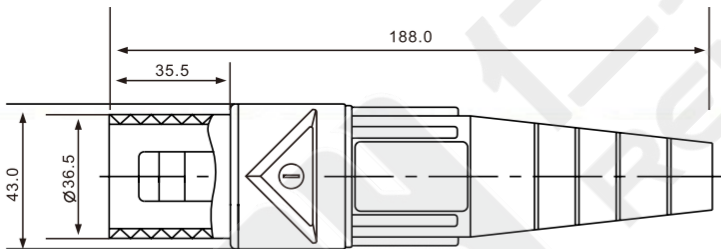

R-LOK400G-YE    R-LOK400G-GN    R-LOK400G-RD    R-LOK400G-BU    R-LOK400G-BK    R-LOK400G-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                       | 颜色<br>( Color ) |
|-------------------|--------------------------------------|-----------------|
| R-LOK400G-YE      | 线上电公插头(Online electricity male plug) | 黄色 (Yellow)     |
| R-LOK400G-GN      | 线上电公插头(Online electricity male plug) | 绿色 (Green)      |
| R-LOK400G-RD      | 线上电公插头(Online electricity male plug) | 红色 (Red)        |
| R-LOK400G-BU      | 线上电公插头(Online electricity male plug) | 蓝色 (Blue)       |
| R-LOK400G-BK      | 线上电公插头(Online electricity male plug) | 黑色 (Black)      |
| R-LOK400G-WH      | 线上电公插头(Online electricity male plug) | 白色 (White)      |

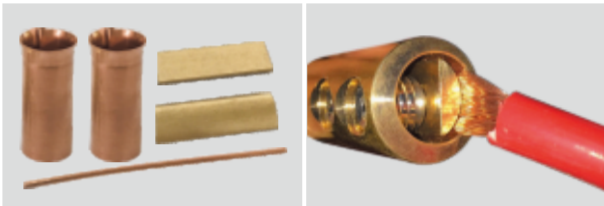

配有多种规格垫片，可根据需要选择。

With a variety of specifications of gaskets, according to the need to choose.

# 400A美规接插件 400A US gauge connector

## CEE/IEC国际标准 National standards

符合德国工业标准DIN VDE 0623, 欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2

### R-LOK单接点400A大功率凸轮式电源接头

单接点400A大功率凸轮式电源接头，非导电材质的锁紧螺丝穿过铜导针，将导针稳定固定在绝缘套中，不使用工具安装、拆卸方便，能与其它主国际主要品牌相同CAM式400A大功率凸轮式电源接头兼容，适用于室内外的舞台演出，电影拍摄，展览展示等暂时性电源供应，发动机，发电机等设备的专业接头。

### R-lok single contact 400A high-power CAM power connector

The single contact 400A high-power CAM power connector independently designed, The locking screw of non-conductive material passes through the copper guide wire, Fix the guide pin in the insulation sleeve stably. Easy to install and disassemble without using tools, it can be compatible with other major international brands of CAM type 400A high-power CAM power connector. Suitable for indoor and outdoor stage performances, Film making, Temporary power supply for exhibitions and exhibitions, The engine, Professional connectors for generators and other equipment.




#### R-LOK400G

##### 线上电母插头

额定电压：600V最大  
接头材质：铜合金  
绝缘外壳：耐温范围-50~90°C  
适合线径编号：#6、#4、#2、2/0、4/0  
额定电流：400A最大  
锁紧螺丝材料：增强PA6

##### Cable plug


Rated voltage: 600V Max  
Joint material: copper alloy  
Insulation case: temperature resistance range -50 ~ 90°C  
Suitable line sizes: #6, #4, #2, 2/0, 4/0  
Rated current: 400A Max  
Locking screw material: PA6 enhancement

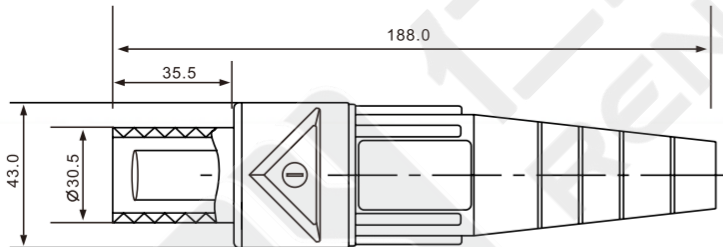

R-LOK400G-YE    R-LOK400G-GN    R-LOK400G-RD    R-LOK400G-BU    R-LOK400G-BK    R-LOK400G-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                         | 颜色<br>( Color ) |
|-------------------|----------------------------------------|-----------------|
| R-LOK400G-YE      | 线上电母插头(Online electricity female plug) | 黄色 (Yellow)     |
| R-LOK400G-GN      | 线上电母插头(Online electricity female plug) | 绿色 (Green)      |
| R-LOK400G-RD      | 线上电母插头(Online electricity female plug) | 红色 (Red)        |
| R-LOK400G-BU      | 线上电母插头(Online electricity female plug) | 蓝色 (Blue)       |
| R-LOK400G-BK      | 线上电母插头(Online electricity female plug) | 黑色 (Black)      |
| R-LOK400G-WH      | 线上电母插头(Online electricity female plug) | 白色 (White)      |

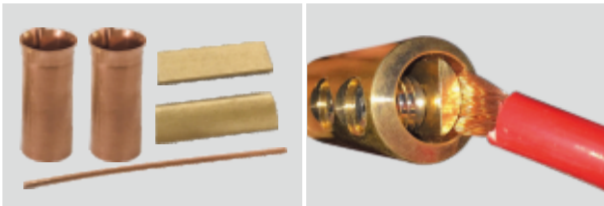

配有多种规格垫片，可根据需要选择。

With a variety of specifications of gaskets, according to the need to choose.

# 400A美规接插件 400A US gauge connector

## CEE/IEC国际标准 National standards

符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2

### R-LOK单接点400A大功率凸轮式电源接头

单接点400A大功率凸轮式电源接头，非导电材质的锁紧螺丝穿过铜导针，将导针稳定固定在绝缘套中，不使用工具安装、拆卸方便，能与其它主国际主要品牌相同CAM式400A大功率凸轮式电源接头兼容，适用于室内外的舞台演出，电影拍摄，展览展示等暂时性电源供应，发动机，发电机等设备的专业接头。

### R-lok single contact 400A high-power CAM power connector




Single contact 400A high-power CAM power connector, non-conductive material locking screw through the copper guide pin, guide pin stable fixed on the insulation sleeveIt is easy to install and disassemble without using tools. It is compatible with the CAM type 400A high-power CAM power connector of other major international brands and suitable for indoor and outdoor useStage performance, film shooting, exhibition and other temporary power supply, engine, generator and other equipment professional connectors.



#### R-LOK400GZ

**座上电公插座**  
额定电压：600v最大  
接头材质：铜合金  
绝缘外壳：耐温范围-50~90℃  
额定电流：400A最大

**Cable plug**  
Rated voltage: 600V  
MaxJoint material: copper alloy  
Insulation case: temperature resistance range -50 ~ 90℃

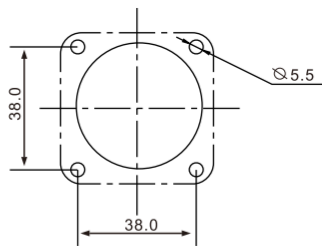

R-LOK400GZ-YE    R-LOK400GZ-GN    R-LOK400GZ-RD    R-LOK400GZ-BU    R-LOK400GZ-BK    R-LOK400GZ-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                         | 颜色<br>( Color ) |
|-------------------|----------------------------------------|-----------------|
| R-LOK400GZ-YE     | 座上电公插座(Online electricity female plug) | 黄色 (Yellow)     |
| R-LOK400GZ-GN     | 座上电公插座(Online electricity female plug) | 绿色 (Green)      |
| R-LOK400GZ-RD     | 座上电公插座(Online electricity female plug) | 红色 (Red)        |
| R-LOK400GZ-BU     | 座上电公插座(Online electricity female plug) | 蓝色 (Blue)       |
| R-LOK400GZ-BK     | 座上电公插座(Online electricity female plug) | 黑色 (Black)      |
| R-LOK400GZ-WH     | 座上电公插座(Online electricity female plug) | 白色 (White)      |

# 400A美规接插件 400A US gauge connector

## CEE/IEC国际标准 National standards


符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2

### R-LOK单接点400A大功率凸轮式电源接头

单接点400A大功率凸轮式电源接头，非导电材质的锁紧螺丝穿过铜导针，将导针稳定固定在绝缘套中，不使用工具安装、拆卸方便，能与其它主国际主要品牌相同CAM式400A大功率凸轮式电源接头兼容，适用于室内外的舞台演出，电影拍摄，展览展示等暂时性电源供应，发动机，发电机等设备的专业接头。

### R-lok single contact 400A high-power CAM power connector


Single contact 400A high-power CAM power connector, non-conductive material locking screw through the copper guide pin, guide pin stable fixed on the insulation sleeve It is easy to install and disassemble without using tools. It is compatible with the CAM type 400A high-power CAM power connector of other major international brands and suitable for indoor and outdoor use Stage performance, film shooting, exhibition and other temporary power supply, engine, generator and other equipment professional connectors.

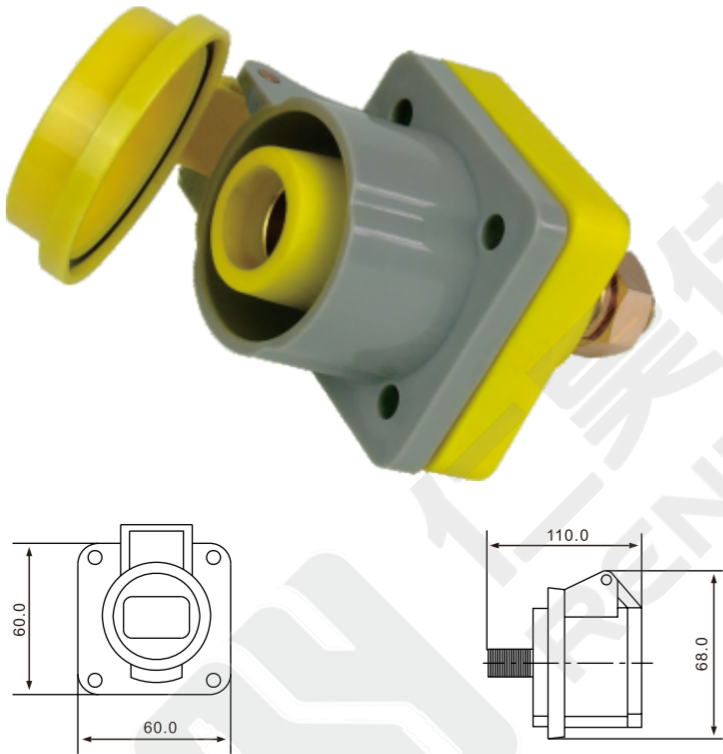

#### R-LOK400MZ

**座上电母插座**  
额定电压：600v最大  
接头材质：铜合金  
绝缘外壳：耐温范围-50~90℃  
额定电流：400A最大

**Cable plug**  
Rated voltage: 600V  
Max.Joint material: copper alloy  
Insulation case: temperature resistance range -50 ~ 90℃  
Rated current: 400A Max

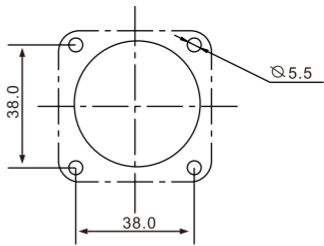

R-LOK400MZ-YE    R-LOK400MZ-GN    R-LOK400MZ-RD    R-LOK400MZ-BU    R-LOK400MZ-BK    R-LOK400MZ-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                         | 颜色<br>( Color ) |
|-------------------|----------------------------------------|-----------------|
| R-LOK400GZ-YE     | 座上电母插头(Online electricity female plug) | 黄色 (Yellow)     |
| R-LOK400GZ-GN     | 座上电母插座(Online electricity female plug) | 绿色 (Green)      |
| R-LOK400GZ-RD     | 座上电母插座(Online electricity female plug) | 红色 (Red)        |
| R-LOK400GZ-BU     | 座上电母插座(Online electricity female plug) | 蓝色 (Blue)       |
| R-LOK400GZ-BK     | 座上电母插座(Online electricity female plug) | 黑色 (Black)      |
| R-LOK400GZ-WH     | 座上电母插座(Online electricity female plug) | 白色 (White)      |

# 150A美规接插件 150A US gauge connector

## CEE/IEC国际标准 National standards


符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2



### RXG150

**线上电公插头**  
额定电压AC: 600V ,  
额定电流 : 150A ,  
可分别与RXMZ150母插座  
或RXM150母插头配套使用 ,  
适用电缆标称截面积 : 最大25MM<sup>2</sup>  
接线方式 : 螺钉压接。

**Cable plug**  
Rated voltage AC: 600V,  
rated current: 150A,  
can be used with RXMZ150 female socket or  
RXM150 female plug,  
suitable for cable nominal sectional area: maximum25MM<sup>2</sup>  
Wiring: Screw compression.

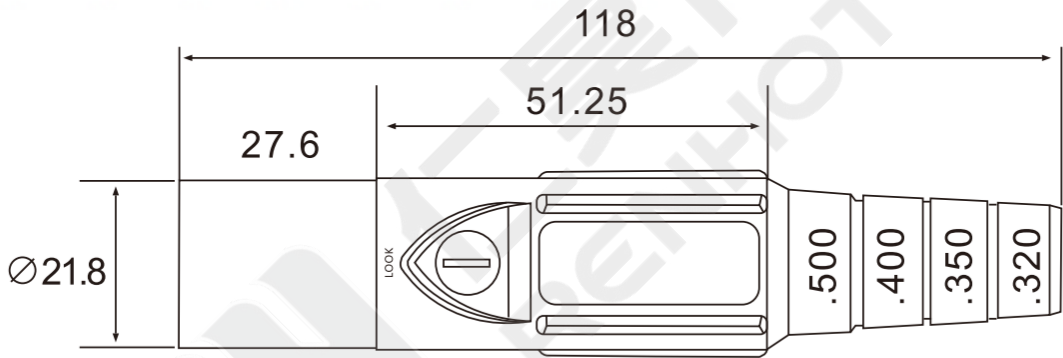

RXG150-YE      RXG150-GN      RXG150-RD      RXG150-BU      RXG150-BK      RXG150-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                       | 颜色<br>( Color ) |
|-------------------|--------------------------------------|-----------------|
| RXG150-YE         | 线上电公插头(Online electricity male plug) | 黄色 (Yellow)     |
| RXG150-GN         | 线上电公插座(Online electricity male plug) | 绿色 (Green)      |
| RXG150-RD         | 线上电公插座(Online electricity male plug) | 红色 (Red)        |
| RXG150-BU         | 线上电公插座(Online electricity male plug) | 蓝色 (Blue)       |
| RXG150-BK         | 线上电公插座(Online electricity male plug) | 黑色 (Black)      |
| RXG150-WH         | 线上电公插座(Online electricity male plug) | 白色 (White)      |

# 150A美规接插件 150A US gauge connector

## CEE/IEC国际标准 National standards


符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2



### RXM150

**线上电母插头**  
额定电压AC: 600V ,  
额定电流 : 150A ,  
可分别与RXMZ150母插座  
或RXM150母插头配套使用 ,  
适用电缆标称截面积 : 最大25MM<sup>2</sup>  
接线方式 : 螺钉压接。

**Cable plug**  
Rated voltage AC: 600V,  
rated current: 150A,  
can be used with RXMZ150 female socket or  
RXM150 female plug,  
suitable for cable nominal sectional area: maximum25MM<sup>2</sup>  
Wiring: Screw compression.

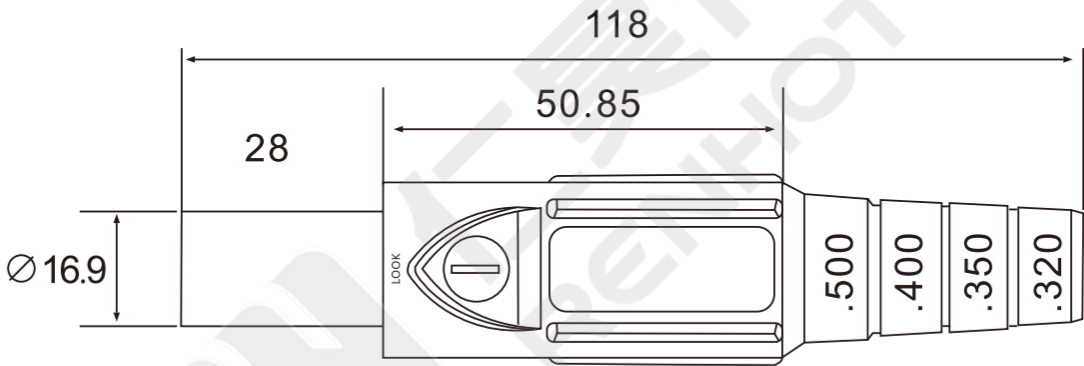

RXM150-YE      RXM150-GN      RXM150-RD      RXM150-BU      RXM150-BK      RXM150-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                         | 颜色<br>( Color ) |
|-------------------|----------------------------------------|-----------------|
| RXM150-YE         | 线上电母插头(Online electricity female plug) | 黄色 (Yellow)     |
| RXM150-GN         | 线上电母插头(Online electricity female plug) | 绿色 (Green)      |
| RXM150-RD         | 线上电母插头(Online electricity female plug) | 红色 (Red)        |
| RXM150-BU         | 线上电母插头(Online electricity female plug) | 蓝色 (Blue)       |
| RXM150-BK         | 线上电母插头(Online electricity female plug) | 黑色 (Black)      |
| RXM150-WH         | 线上电母插头(Online electricity female plug) | 白色 (White)      |

# 150A美规接插件 150A US gauge connector

## CEE/IEC国际标准 National standards



符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2



### RXGZ150

**座上电公插座**  
额定电压AC: 600V ,  
额定电流 : 150A ,  
可与RXM150母插头配套使用 ,  
适用电缆标称截面积 : 最大25MM<sup>2</sup>  
接线方式 : 端子压接。

**Cable plug**  
Ated voltage AC: 600V,  
Rated current: 150A,  
Can be used with RXM150 female plug,  
suitable for cable sectional area: maximum 25MM<sup>2</sup>  
Connection mode: terminalPressure welding.

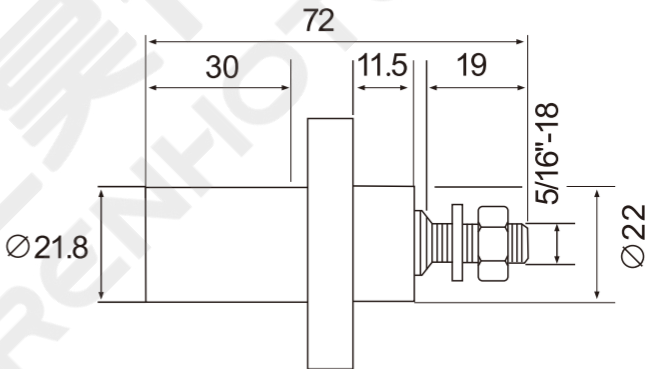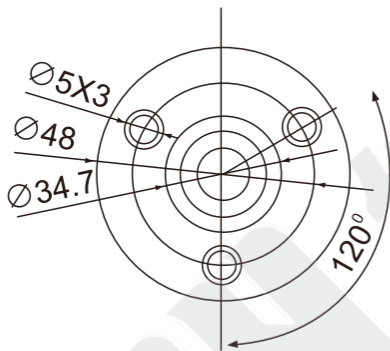

RXGZ150-YE



RXGZ150-GN



RXGZ150-RD



RXGZ150-BU



RXGZ150-BK



RXGZ150-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                   | 颜色<br>( Color ) |
|-------------------|----------------------------------|-----------------|
| RXGZ150-YE        | 座上电公插头(On electricity male plug) | 黄色 (Yellow)     |
| RXGZ150-GN        | 座上电公插头(On electricity male plug) | 绿色 (Green)      |
| RXGZ150-RD        | 座上电公插头(On electricity male plug) | 红色 (Red)        |
| RXGZ150-BU        | 座上电公插头(On electricity male plug) | 蓝色 (Blue)       |
| RXGZ150-BK        | 座上电公插头(On electricity male plug) | 黑色 (Black)      |
| RXGZ150-WH        | 座上电公插头(On electricity male plug) | 白色 (White)      |

# 150A美规接插件 150A US gauge connector

## CEE/IEC国际标准 National standards

符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2

Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2





### RXMZ150

#### 座上母插座

额定电压AC: 600V ,  
额定电流 : 150A ,  
可与RXG150公插头配套使用 ,  
适用电缆标称截面积 : 最大25MM<sup>2</sup>  
接线方式 : 端子压接。

#### Cable plug

Rated voltage AC: 600V,  
Rated current: 150A,  
can be used with RXG150 male plug,  
suitable for cable sectional area: maximum 25MM<sup>2</sup>  
Connection mode: terminal Pressure welding.

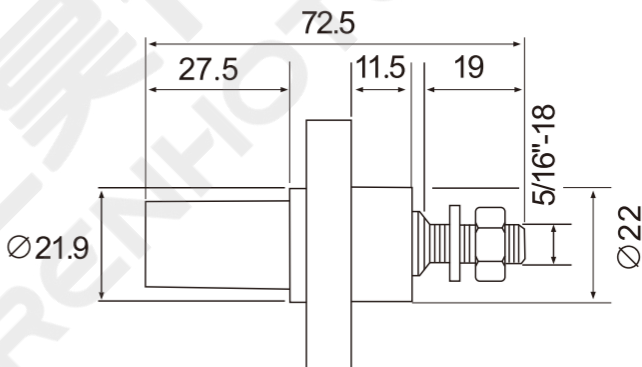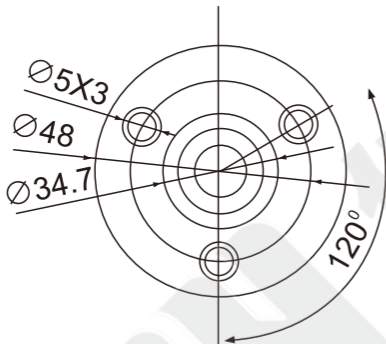

RXMZ150-YE



RXMZ150-GN



RXMZ150-RD



RXMZ150-BU



RXMZ150-BK



RXMZ150-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                       | 颜色<br>( Color ) |
|-------------------|--------------------------------------|-----------------|
| RXMZ150-YE        | 座上电母插座(On electricity female socket) | 黄色 (Yellow)     |
| RXMZ150-GN        | 座上电母插座(On electricity female socket) | 绿色 (Green)      |
| RXMZ150-RD        | 座上电母插座(On electricity female socket) | 红色 (Red)        |
| RXMZ150-BU        | 座上电母插座(On electricity female socket) | 蓝色 (Blue)       |
| RXMZ150-BK        | 座上电母插座(On electricity female socket) | 黑色 (Black)      |
| RXMZ150-WH        | 座上电母插座(On electricity female socket) | 白色 (White)      |

# 200A美式犀牛插 200A American Rhinoceros Insert


## CEE/IEC国际标准 National standards

符合德国工业标准DIN VDE 0623, 欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2

### RXG200

**线上电公插头**  
额定电压AC: 600V ,  
额定电流 : 200A ,  
可分别与RXMZ200母插座  
或RXM200母插头配套使用 ,  
适用电缆标称截面积 : 最大16~35MM<sup>2</sup>  
接线方式 : 螺钉压接。


**Cable plug**  
Rated voltage AC: 600V,  
Rated current: 200A,  
It can be used together with RXMZ200 female socket or  
RXM200 female plug.  
Applicable cable sectional area: maximum 16 ~ 35MM<sup>2</sup>  
Wiring: Screw compression.

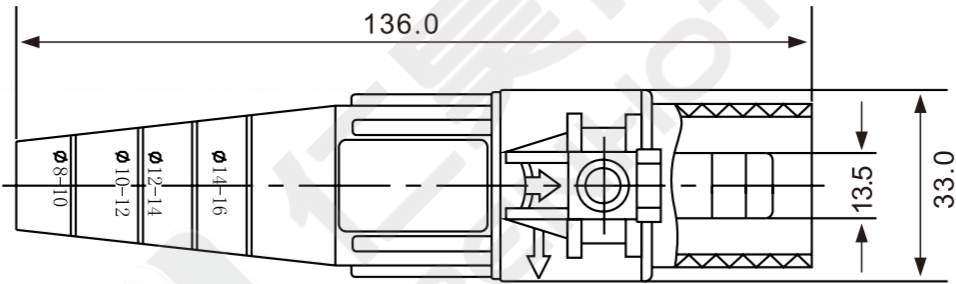

RXG200-YE      RXG200-GN      RXG200-RD      RXG200-BU      RXG200-BK      RXG200-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                       | 颜色<br>( Color ) |
|-------------------|--------------------------------------|-----------------|
| RXG200-YE         | 线上电公插头(Online electricity male plug) | 黄色 (Yellow)     |
| RXG200-GN         | 线上电公插头(Online electricity male plug) | 绿色 (Green)      |
| RXG200-RD         | 线上电公插头(Online electricity male plug) | 红色 (Red)        |
| RXG200-BU         | 线上电公插头(Online electricity male plug) | 蓝色 (Blue)       |
| RXG200-BK         | 线上电公插头(Online electricity male plug) | 黑色 (Black)      |
| RXG200-WH         | 线上电公插头(Online electricity male plug) | 白色 (White)      |

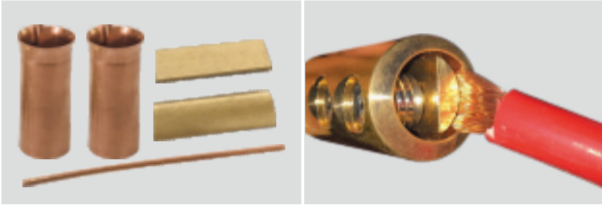

配有多种规格垫片，可根据需要选择。

With a variety of specifications of gaskets, according to the need to choose.

# 200A美式犀牛插 200A American Rhinoceros Insert

## CEE/IEC国际标准 National standards

符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2

Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2




### RXG200

#### 线上电母插头

额定电压AC: 600V ,  
额定电流 : 200A ,  
可分别与RXGZ200公插座  
或RXG200公插头配套使用 ,  
适用电缆标称截面积 : 最大16~35MM<sup>2</sup>  
接线方式 : 螺钉压接。

#### Cable plug

Rated voltage AC: 600V,  
Rated current: 200A,  
It can be used together with RXG200 male socket or  
RXG200 male plug.  
Applicable cable sectional area: maximum 16 ~ 35MM<sup>2</sup>  
Wiring: Screw compression.

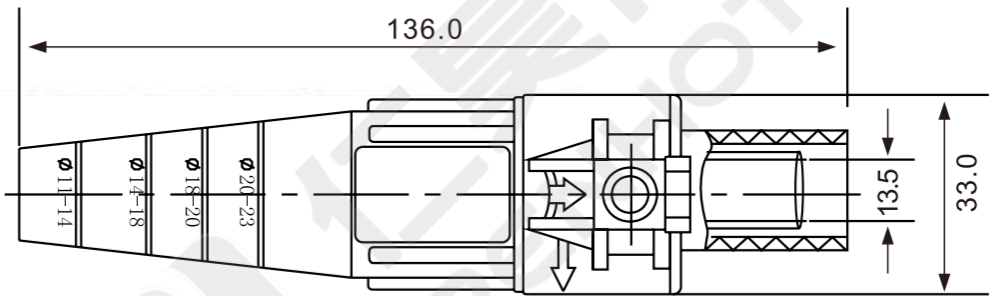

RXM200-YE



RXM200-GN



RXM200-RD



RXM200-BU




RXM200-BK



RXM200-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                         | 颜色<br>( Color ) |
|-------------------|----------------------------------------|-----------------|
| RXM200-YE         | 线上电母插头(Online electricity female plug) | 黄色 (Yellow)     |
| RXM200-GN         | 线上电母插头(Online electricity female plug) | 绿色 (Green)      |
| RXM200-RD         | 线上电母插头(Online electricity female plug) | 红色 (Red)        |
| RXM200-BU         | 线上电母插头(Online electricity female plug) | 蓝色 (Blue)       |
| RXM200-BK         | 线上电母插头(Online electricity female plug) | 黑色 (Black)      |
| RXM200-WH         | 线上电母插头(Online electricity female plug) | 白色 (White)      |

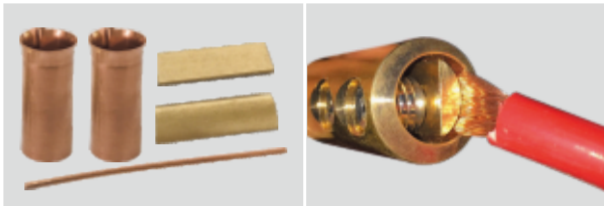

配有多种规格垫片，可根据需要选择。

With a variety of specifications of gaskets,  
according to the need to choose.

# 200A美式犀牛插 200A American Rhinoceros Insert

## CEE/IEC国际标准 National standards


符合德国工业标准DIN VDE 0623,欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2



### RXGZ200

**座上电公插座**  
额定电压AC: 600V ,  
额定电流 : 200A ,  
可与RXM200母插头配套使用 ,  
适用电缆标称截面积 : 最大16~35MM<sup>2</sup>  
接线方式 : 端子压接。

**Cable plug**  
Ated voltage AC: 600V,  
Rated current: 200A,  
can be used with RXM200 female plug  
Applicable cable sectional area : Maximum 16 ~ 35MM<sup>2</sup>  
Connection mode: terminalPressure welding.

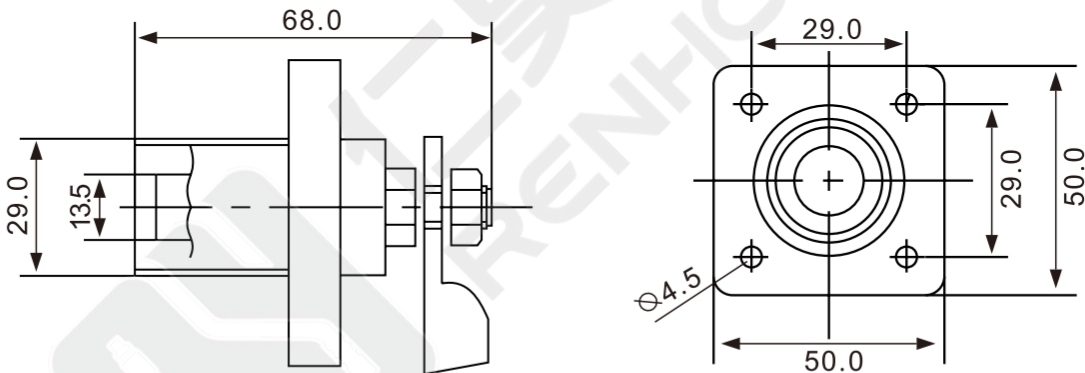

RXGZ200-YE      RXGZ200-GN      RXGZ200-RD      RXGZ200-BU      RXGZ200-BK      RXGZ200-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                     | 颜色<br>( Color ) |
|-------------------|------------------------------------|-----------------|
| RXGZ200-YE        | 座上电公插座(On electricity male socket) | 黄色 (Yellow)     |
| RXGZ200-GN        | 座上电公插座(On electricity male socket) | 绿色 (Green)      |
| RXGZ200-RD        | 座上电公插座(On electricity male socket) | 红色 (Red)        |
| RXGZ200-BU        | 座上电公插座(On electricity male socket) | 蓝色 (Blue)       |
| RXGZ200-BK        | 座上电公插座(On electricity male socket) | 黑色 (Black)      |
| RXGZ200-WH        | 座上电公插座(On electricity male socket) | 白色 (White)      |

# 200A美式犀牛插 200A American Rhinoceros Insert

## CEE/IEC国际标准 National standards



符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2



### RXMZ200

**座上电母插座**  
额定电压AC: 600V ,  
额定电流：200A ,  
可与RXG200公头配套使用 ,  
适用电缆标称截面积：最大16~35MM<sup>2</sup>  
接线方式：端子压接。

**Cable plug**  
Ated voltage AC: 600V,  
Rated current: 200A,  
can be used with RXG200 male plug  
Applicable cable sectional area: : Maximum 16 ~ 35MM<sup>2</sup>  
Connection mode: terminalPressure welding.

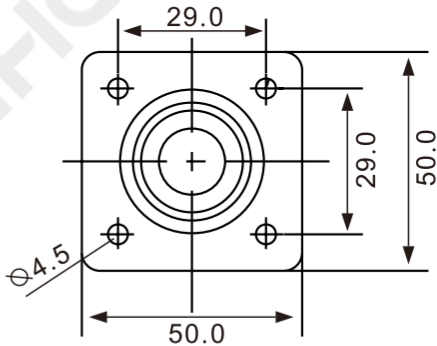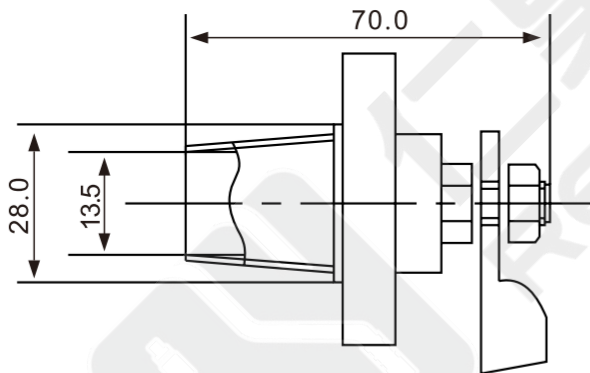

RXMZ200-YE



RXMZ200-GN



RXMZ200-RD



RXMZ200-BU



RXMZ200-BK



RXMZ200-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                       | 颜色<br>( Color ) |
|-------------------|--------------------------------------|-----------------|
| RXMZ150-YE        | 座上电母插座(On electricity female socket) | 黄色 (Yellow)     |
| RXMZ150-GN        | 座上电母插座(On electricity female socket) | 绿色 (Green)      |
| RXMZ150-RD        | 座上电母插座(On electricity female socket) | 红色 (Red)        |
| RXMZ150-BU        | 座上电母插座(On electricity female socket) | 蓝色 (Blue)       |
| RXMZ150-BK        | 座上电母插座(On electricity female socket) | 黑色 (Black)      |
| RXMZ150-WH        | 座上电母插座(On electricity female socket) | 白色 (White)      |

# 400A美式犀牛插 400A American Rhinoceros Insert


## CEE/IEC国际标准 National standards

符合德国工业标准DIN VDE 0623, 欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2

### RXG400

**线上电公插头**  
额定电压AC: 600V ,  
额定电流 : 400A ,  
可分别与RXMZ400母插座  
或RXM400母插头配套使用 ,  
适用电缆标称截面积 : 最大50~95MM<sup>2</sup>  
接线方式 : 螺钉压接。

**Cable plug**  
Rated voltage AC: 600V,  
Rated current: 400A,  
It can be used together with RXMZ400 female socket or  
RXM400 female plug.  
Applicable cable sectional area: maximum 50 ~ 95MM<sup>2</sup>  
Wiring: Screw compression.

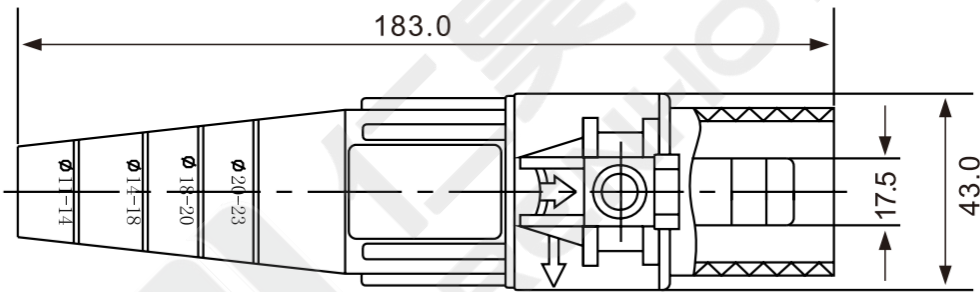

RXG400-YE



RXG400-GN



RXG400-RD



RXG400-BU




RXG400-BK



RXG400-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                       | 颜色<br>( Color ) |
|-------------------|--------------------------------------|-----------------|
| RXG400-YE         | 线上电公插头(Online electricity male plug) | 黄色 (Yellow)     |
| RXG400-GN         | 线上电公插头(Online electricity male plug) | 绿色 (Green)      |
| RXG400-RD         | 线上电公插头(Online electricity male plug) | 红色 (Red)        |
| RXG400-BU         | 线上电公插头(Online electricity male plug) | 蓝色 (Blue)       |
| RXG400-BK         | 线上电公插头(Online electricity male plug) | 黑色 (Black)      |
| RXG400-WH         | 线上电公插头(Online electricity male plug) | 白色 (White)      |

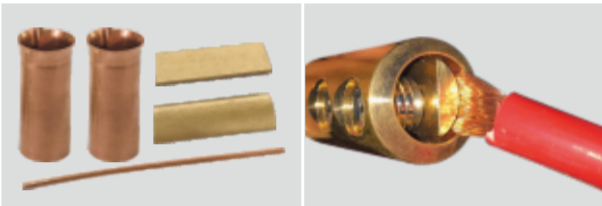

配有多种规格垫片，可根据需要选择。

With a variety of specifications of gaskets, according to the need to choose.

# 400A美式犀牛插 400A American Rhinoceros Insert

## CEE/IEC国际标准 National standards


符合德国工业标准DIN VDE 0623,欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2



### RXM400

**线上电母插头**  
额定电压AC: 600V ,  
额定电流 : 400A ,  
可分别与RXGZ400公插座  
或RXG400公插头配套使用 ,  
适用电缆标称截面积 : 最大50~95MM<sup>2</sup>  
接线方式 : 螺钉压接。

**Cable plug**  
Rated voltage AC: 600V,  
Rated current: 400A,  
It can be used together with RXGZ400 male socket or  
RXG400 male plug.  
Applicable cable sectional area: maximum 50 ~ 95MM<sup>2</sup>  
Wiring: Screw compression.

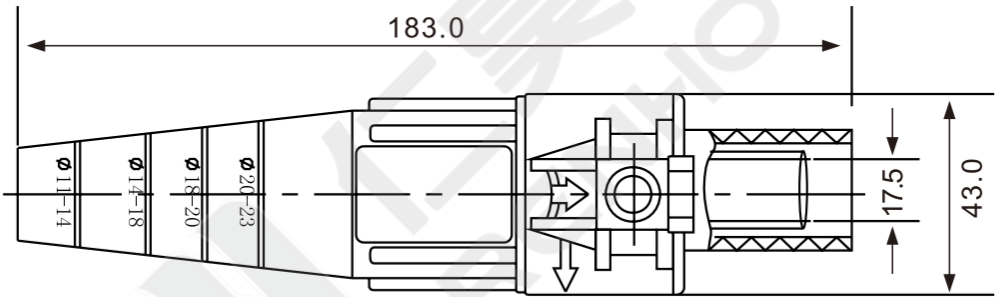

RXM400-YE



RXM400-GN



RXM400-RD



RXM400-BU




RXM400-BK



RXM400-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                         | 颜色<br>( Color ) |
|-------------------|----------------------------------------|-----------------|
| RXM400-YE         | 线上电母插头(Online electricity female plug) | 黄色 (Yellow)     |
| RXM400-GN         | 线上电母插头(Online electricity female plug) | 绿色 (Green)      |
| RXM400-RD         | 线上电母插头(Online electricity female plug) | 红色 (Red)        |
| RXM400-BU         | 线上电母插头(Online electricity female plug) | 蓝色 (Blue)       |
| RXM400-BK         | 线上电母插头(Online electricity female plug) | 黑色 (Black)      |
| RXM400-WH         | 线上电母插头(Online electricity female plug) | 白色 (White)      |

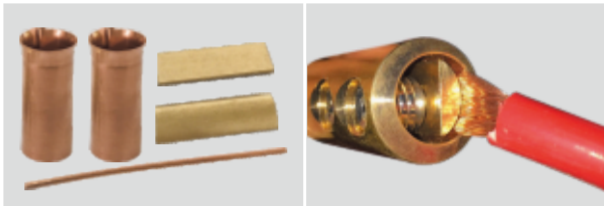

配有多种规格垫片，可根据需要选择。

With a variety of specifications of gaskets,  
according to the need to choose.

# 400A美式犀牛插 400A American Rhinoceros Insert

## CEE/IEC国际标准 National standards


符合德国工业标准DIN VDE 0623.欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2




### RXGZ400

**座上电公插座**  
额定电压AC: 600V ,  
额定电流：400A ,  
可与RXM400母插头配套使用 ,  
适用电缆标称截面积：最大50~95MM<sup>2</sup>  
接线方式：端子压接。

**Cable plug**  
Ated voltage AC: 600V,  
Rated current: 400A,  
can be used with RXM400 female plug  
Applicable cable sectional area: : Maximum 50 ~ 95MM<sup>2</sup>  
Connection mode: terminalPressure welding.

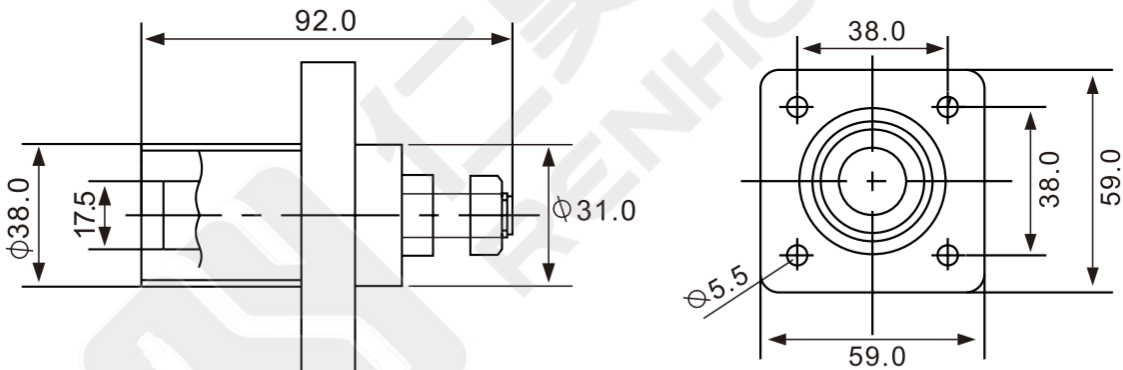

RXGZ400-YE



RXGZ400-GN



RXGZ400-RD



RXGZ400-BU



RXGZ400-BK



RXGZ400-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                     | 颜色<br>( Color ) |
|-------------------|------------------------------------|-----------------|
| RXGZ400-YE        | 座上电公插座(On electricity male socket) | 黄色 (Yellow)     |
| RXGZ400-GN        | 座上电公插座(On electricity male socket) | 绿色 (Green)      |
| RXGZ400-RD        | 座上电公插座(On electricity male socket) | 红色 (Red)        |
| RXGZ400-BU        | 座上电公插座(On electricity male socket) | 蓝色 (Blue)       |
| RXGZ400-BK        | 座上电公插座(On electricity male socket) | 黑色 (Black)      |
| RXGZ400-WH        | 座上电公插座(On electricity male socket) | 白色 (White)      |

# 400A美式犀牛插 400A American Rhinoceros Insert

## CEE/IEC国际标准 National standards



符合德国工业标准DIN VDE 0623, 欧洲/国际标准EN/IEC 60309-2  
Line with the German industrial standard DIN VDE 0623, the European/International standard EN /IEC 60309-2



### RXMZ400

**座上电母插座**  
额定电压AC: 600V ,  
额定电流 : 400A ,  
可与RXG400公插头配套使用 ,  
适用电缆标称截面积 : 最大50~95MM<sup>2</sup>  
接线方式 : 端子压接。

**Cable plug**  
Ated voltage AC: 600V,  
Rated current: 400A,  
can be used with RXG400 male plug  
Applicable cable sectional area : Maximum 50 ~ 95MM<sup>2</sup>  
Connection mode: terminalPressure welding.

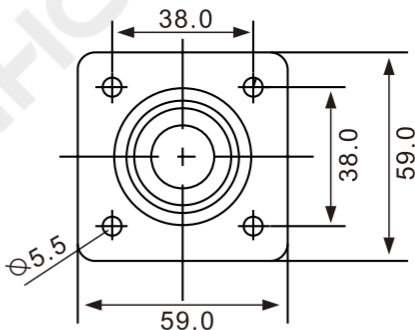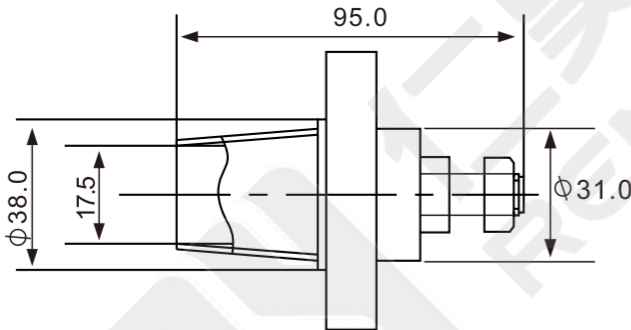

RXMZ400-YE



RXMZ400-GN



RXMZ400-RD



RXMZ400-BU



RXMZ400-BK



RXMZ400-WH

### 规格参数 ( Specification )

| 产品型号<br>( Model ) | 类型<br>( Type )                       | 颜色<br>( Color ) |
|-------------------|--------------------------------------|-----------------|
| RXMZ400-YE        | 座上电母插座(On electricity female socket) | 黄色 (Yellow)     |
| RXMZ400-GN        | 座上电母插座(On electricity female socket) | 绿色 (Green)      |
| RXMZ400-RD        | 座上电母插座(On electricity female socket) | 红色 (Red)        |
| RXMZ400-BU        | 座上电母插座(On electricity female socket) | 蓝色 (Blue)       |
| RXMZ400-BK        | 座上电母插座(On electricity female socket) | 黑色 (Black)      |
| RXMZ400-WH        | 座上电母插座(On electricity female socket) | 白色 (White)      |