


SMA Connector Straight Female Jack For RG58/LMR195 Cable 50 Ohm - RHT-612-6025

Drawing

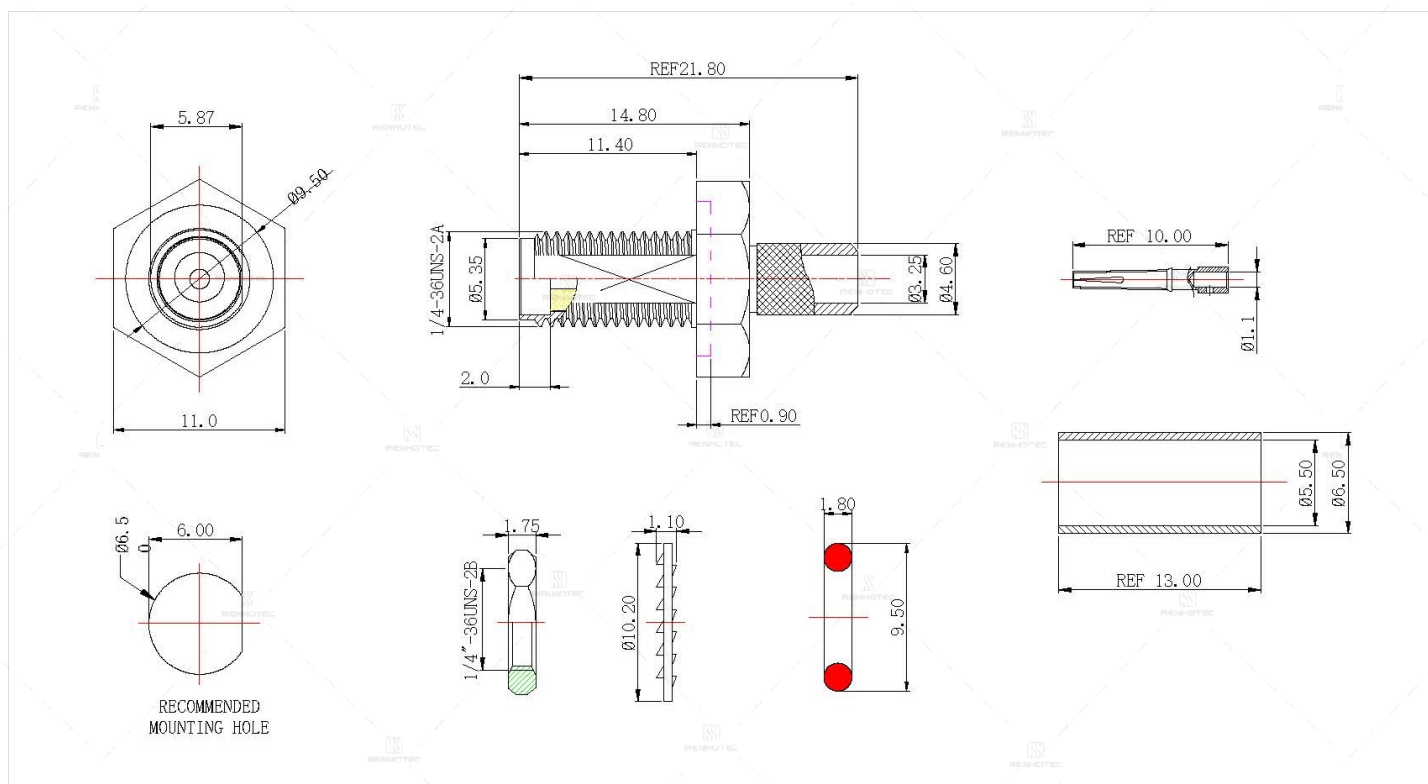

Basic Information

Connector Type	Jack
Contact Type	Female Pin
Contact Termination Style	Solder
Fastening Type	1/4-36 Threaded
Orientation	Straight
Mounting Type	Cable Mount

Electrical Specification

Impedance	50 ohm
Frequency Range	DC-6GHz
VSWR	1.5MAX
Operating Voltage	335V rms
Contact Resistance	Centre Contact: 6mΩ Max Outer Contact: $\leq 0.2 \text{ M}\Omega$ (Milliohms Max.)

Material and Finish

Component Description	Material	Finish
Shell	Brass	Gold Plated
Insulator	PTFE	
Center Contact	Brass	Gold Plated
Copper Tube	Brass	Nickel Plated
Nut	Brass	Gold Plated
Washer	Iron	Gold Plated
O-Ring	Rubber	Red

Environmental Specification



Temperature Range	-40°C to +155°C
--------------------------	-----------------

Mechanical Specification

Mating Durability	≥ 500 Cycles
--------------------------	--------------



Impedance Testing

Impedance	50 ohm
-----------	--------

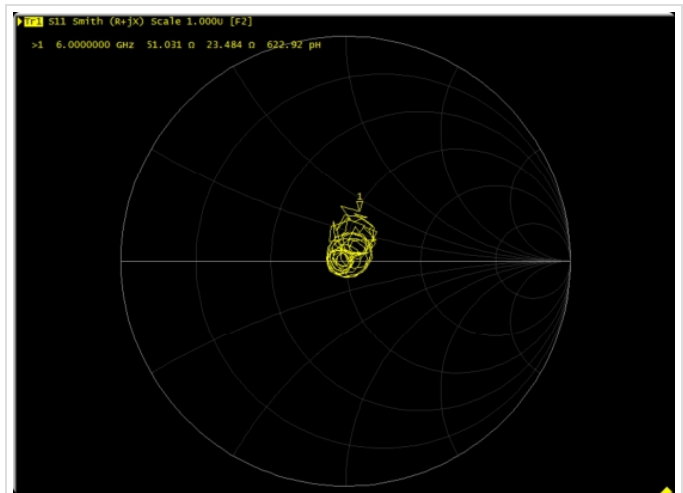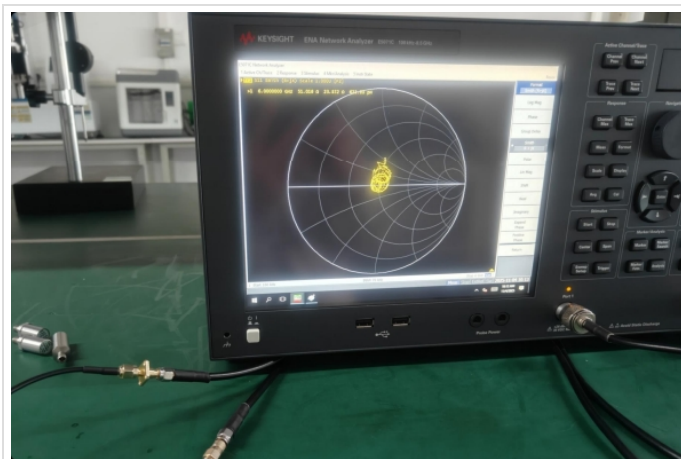

Frequency & VSWR Test Report

Frequency Range	DC-6GHz
VSWR	1.5MAX

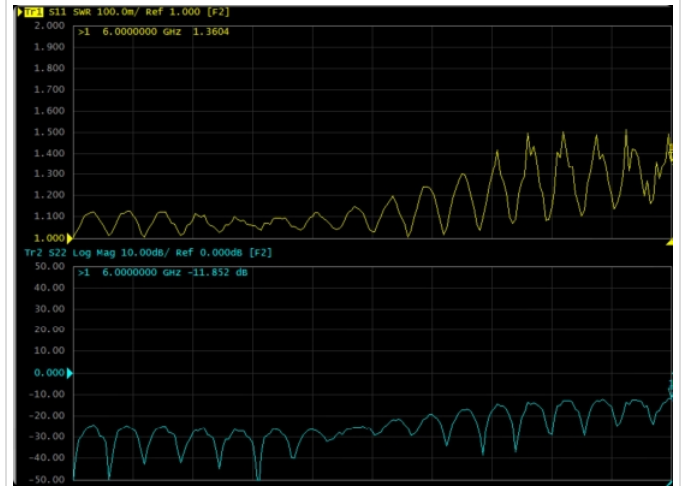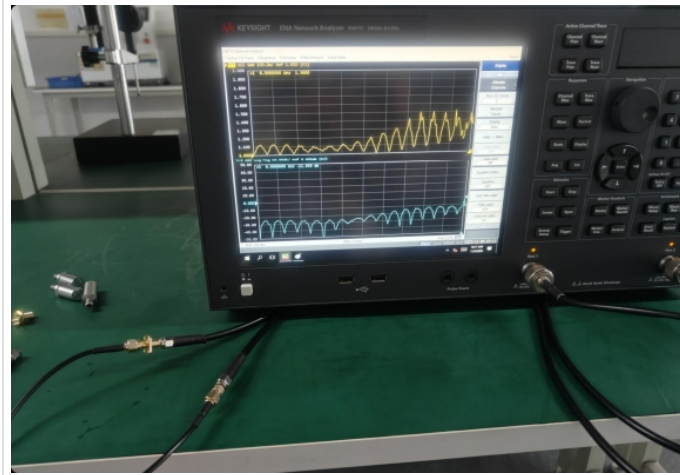

Contact Resistance Test

Contact Type	Male Pin
Center Contact Resistance	6 MΩ Max
Outer Contact Resistance	≅ 0.2 MΩ (Milliohms Max.)
Contact Termination Style	Solder



Working Voltage & Insulation Resistance Test

Rated Voltage	335V rms
Insultation Resistance	5000 Ohms min



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2025.12.17	The initial formulation	Marcella	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.