


SMA Connector Right Angle Male Plug For RG58 Cable 50 Ohm - RHT-612-6074

Drawing

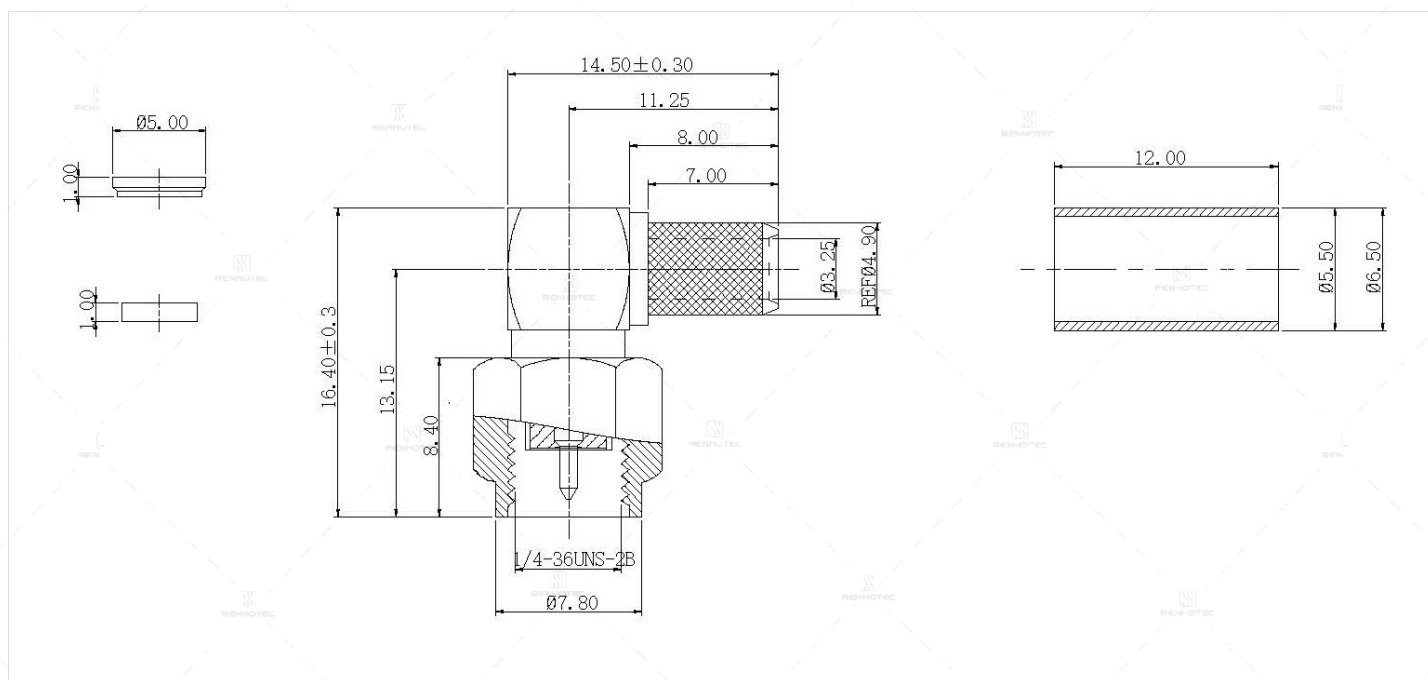

Basic Information

Connector Type	Plug
Contact Type	Male Pin
Contact Termination Style	Crimp
Fastening Type	1/4-36 Threaded
Orientation	Straight
Mounting Type	Cable Mount

Electrical Specification

Impedance	50 ohm
Frequency Range	DC-6GHz
VSWR	1.5MAX
Operating Voltage	335V rms
Dielectric Withstanding Voltage	1000 VRMS Min
Contact Resistance	Centre Contact: 6mΩ Max Outer Contact: ≤ 0.2 MΩ (Milliohms Max.)

Material and Finish

Component Description	Material	Finish
Shell	Brass	Gold Plated
Insulator	PTFE	
Center Contact	Brass	Gold Plated
Copper Tube	Brass	Gold Plated
Metal Cover	Gold Plated	
Insulating Gasket	PTFE	
O-Ring	Rubber	Red
Metal Snap Ring	Steel	Passivation
Nut	Brass	Gold Plated

Environmental Specification


Temperature Range	-60°C to +165°C
--------------------------	-----------------

Mechanical Specification

Mating Durability	≥ 500 Cycles
--------------------------	--------------



Impedance Testing

Impedance	50 ohm
-----------	--------

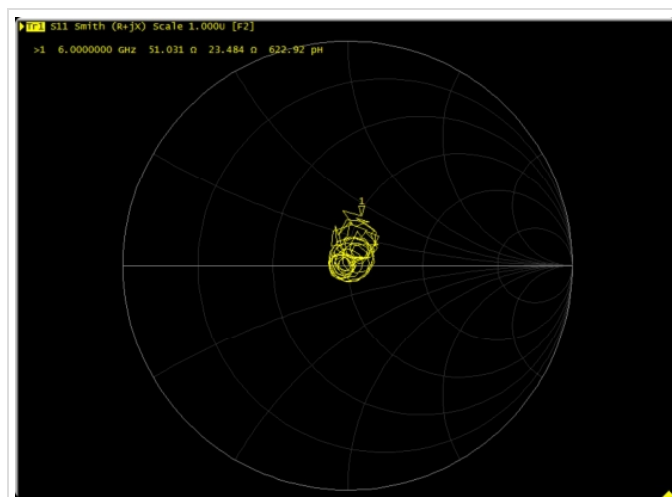

Frequency & VSWR Test Report

Frequency Range	DC-6GHz
VSWR	1.5MAX

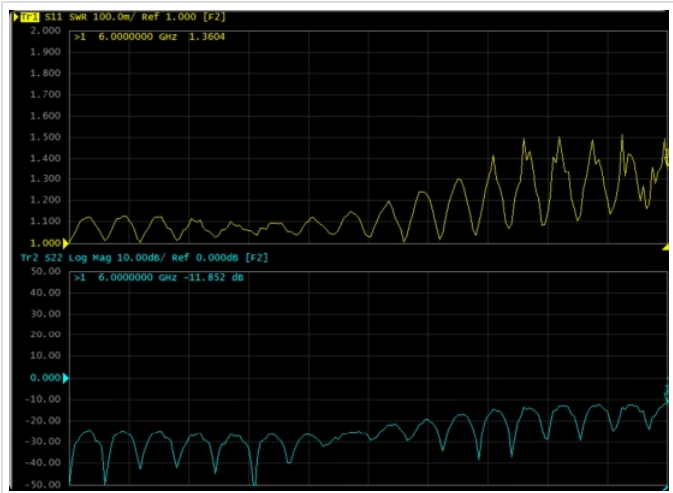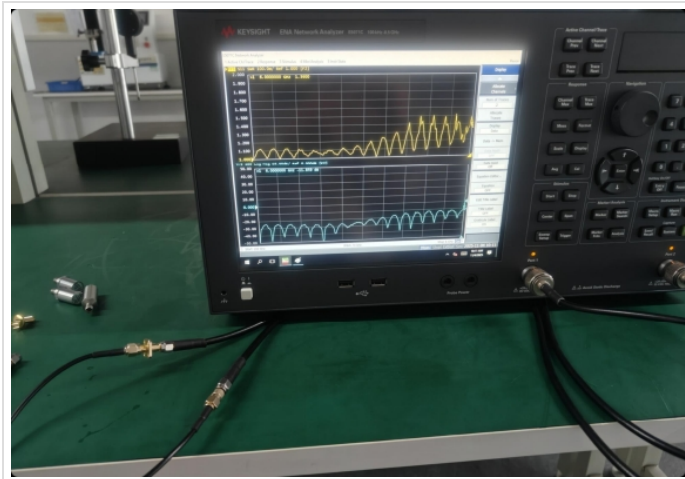

Contact Resistance Test

Contact Type	Male Pin
Center Contact Resistance	6 MΩ Max
Outer Contact Resistance	≅ 0.2 MΩ (Milliohms Max.)
Contact Termination Style	Solder



Working Voltage & Insulation Resistance Test

Rated Voltage	335V rms
Insultation Resistance	5000 Ohms min



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2025.12.17	The initial formulation	Marcella	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.