




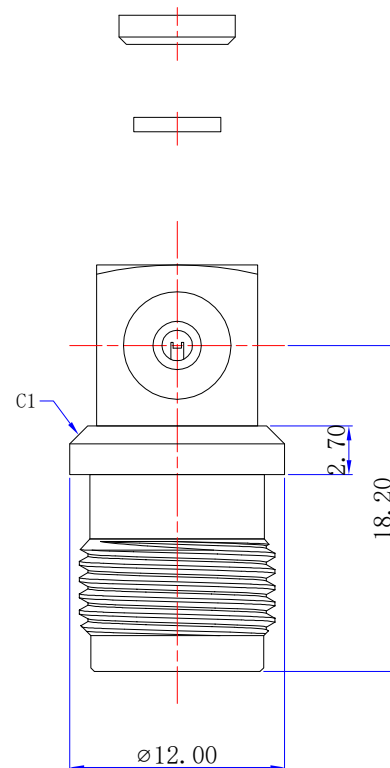

Product NO.

RHT-615-0216

ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Mr. Wang	2021/03/15	JIM. KING
R2.0	Drawing size increase	Gavin	2021/03/15	JIM. KING

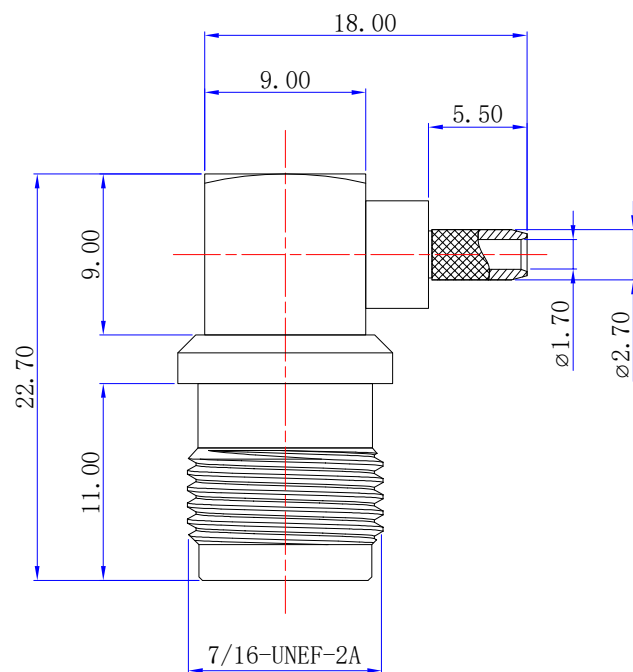

Specifications

Impedance: 50 Ohms

Frequency Range: 0~6Ghz

VSWR: 1.5max

Working Voltage: <170 V rms @ sea level

Insulation Resistance: 5000 MOhms min

Temperature Range: -55°C TO +165°C

6	Center pin	Brass	Nickel	1
5	Cover	Brass	Nickel	1
4	Washer	Ptfe	Natural	1
3	Pin	Brass	Nickel	1
2	Insulator	Ptfe	Natural	1
1	Body	Brass	Nickel	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.10mm
8 - 30mm ± 0.15mm
30 - 120mm ± 0.20mm



RENHOTECH GROUP



PART DESCRIPTION:

R/A TNC JACK FOR RG316 CABLE

Appr: JIM. KING

P/N: RHT-615-0216

Check:

Date

Scale

Unit

Type

Page

Draw:

Gavin

2021.03.15

Free

MM

Z

1/1