



J14 Series J14B Metal Shell 26pin Micro-D MIL-Spec
Female Socket with Cable, L=30cm J14B-26ZK-30

Part Number:

J14B-26ZJ-30

Basic Information

Color	Primary Color
Connector Type	Socket
Contact Termination	Crimp
Contact Type	Female
Mounting Type	Panel Mount
Number of Cores	26
Number of Interface Rows	3
Orientation	Straight
Wire Length	30cm

Environmental Specification

Operating Temperature	-55°C to +125°C
-----------------------	-----------------

Material Specification

Contact Plating	Gold-plated
Housing Material	Aluminum Alloy
Housing Plating	Nickel-plated

Electrical Specification

Contact Resistance	$\leq 10\text{M}\Omega$
Insulation Resistance	$\geq 2000\text{M}\Omega$
Rated Current	2A
Wire Gauge	0.15mm ²
Withstand Dielectric Voltage	800V

Mechanical Specification


Mounting Feature	Flange
------------------	--------

How to Order

Part Number Structure: J14B-26TK

J	Series Prefix Product series designation code.
14	Design Series Number Identifies the design series of the connector.
B	Modification / Revision Code Indicates the modification or variant revision of the base design.
-26	Number of Contacts Total contact position count (e.g. -26 = 26 contacts).
T	Connector Type Z = Receptacle (socket housing) T = Plug (pin housing)
K	Contact Type K = Socket contact (female) J = Pin contact (male)

Contact Layout

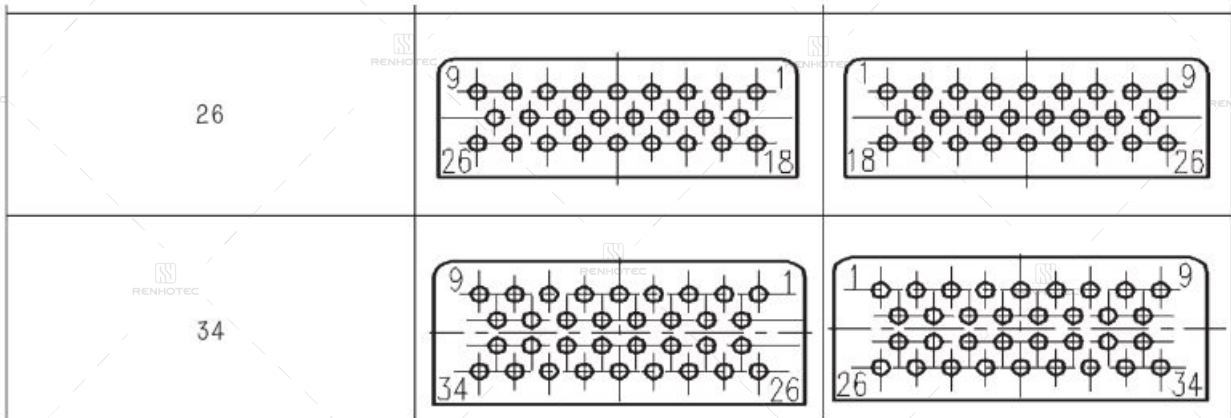

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.